



TO-220



ITO-220



Pin Definition:

1. Base
2. Collector
3. Emitter

PRODUCT SUMMARY

BV_{CEO}	400V
BV_{CBO}	700V
I_C	4A
$V_{CE(SAT)}$	1V @ $I_C=4A$, $I_B=1A$

Features

- High Voltage
- High Speed Switching

Structure


- Silicon Triple Diffused Type
- NPN Silicon Transistor

Ordering Information

Part No.	Package	Packing
TS13005CZ C0	TO-220	50pcs / Tube
TS13005CZ C0G	TO-220	50pcs / Tube
TS13005CI C0	ITO-220	50pcs / Tube
TS13005CI C0G	ITO-220	50pcs / Tube

Note: "G" denote for Halogen Free Product

Block Diagram

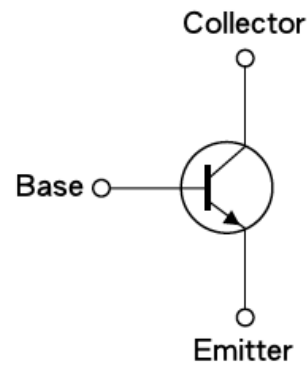

Absolute Maximum Rating ($T_a = 25^\circ\text{C}$ unless otherwise noted)

Parameter		Symbol	Limit	Unit
Collector-Base Voltage		V_{CBO}	700	V
Collector-Emitter Voltage		V_{CEO}	400	V
Emitter-Base Voltage		V_{EBO}	9	V
Collector Current	DC	I_C	4	A
	Pulse		8	
Base Current	DC	I_B	2	A
	Pulse		4	
Total Power Dissipation	TO-220	P_{tot}	75	W
	ITO-220		30	
Operating Junction Temperature		T_J	+150	$^\circ\text{C}$
Operating Junction and Storage Temperature Range		T_{STG}	- 55 to +150	$^\circ\text{C}$

Note: Single Pulse. $P_w = 300\mu\text{S}$, Duty $\leq 2\%$

Electrical Specifications (Ta = 25°C unless otherwise noted)

Parameter	Conditions	Symbol	Min	Typ	Max	Unit
Static						
Collector-Base Voltage	I _C =1mA, I _B =0	BV _{CBO}	700	--	--	V
Collector-Emitter Breakdown Voltage	I _C =10mA, I _E =0	BV _{CEO}	400	--	--	V
Emitter-Base Breakdown Voltage	I _E =0.1mA, I _C =0	BV _{EBO}	9	--	--	V
Collector Cutoff Current	V _{CE} =400V, I _B =0	I _{CEO}	--	--	250	uA
Collector Cutoff Current	V _{CB} =700V, I _E =0	I _{CBO}	--	--	1	mA
Emitter Cutoff Current	V _{EB} = 9V, I _C =0	I _{EBO}	--	--	1	mA
Collector-Emitter Saturation Voltage	I _C =1A, I _B =0.2A	V _{CE(SAT)1}	--	--	0.5	V
	I _C =2A, I _B =0.5A	V _{CE(SAT)2}	--	--	0.6	
	I _C =4A, I _B =1A	V _{CE(SAT)3}	--	--	1	
Base-Emitter Saturation Voltage	I _C =1A, I _B =0.2A	V _{BE(SAT)1}	--	--	1.2	V
	I _C =2A, I _B =0.5A	V _{BE(SAT)2}	--	--	1.6	
DC Current Gain	V _{CE} =5V, I _C = 1A	h _{FE}	15	--	32	
	V _{CE} =5V, I _C = 2A		8	--	40	
Dynamic						
Frequency	V _{CE} =10V, I _C =0.5A	f _T	4	--	--	MHz
Output Capacitance	V _{CB} =10V, f =0.1MHz	C _{ob}	--	65	--	pF
Resistive Load						
Turn On Time	V _{CC} =125V, I _C =2A, I _{B1} =I _{B2} =0.4A, t _p =25uS Duty Cycle ≤1%	t _{ON}	--	0.3	0.7	uS
Storage Time		t _{STG}	--	2.2	3	uS
Fall Time		t _f	--	0.3	0.5	uS

Note: pulse test: pulse width $\leq 300\mu\text{s}$, duty cycle $\leq 2\%$

Electrical Characteristics Curve ($T_a = 25^\circ\text{C}$, unless otherwise noted)

Figure 1. Static Characteristics

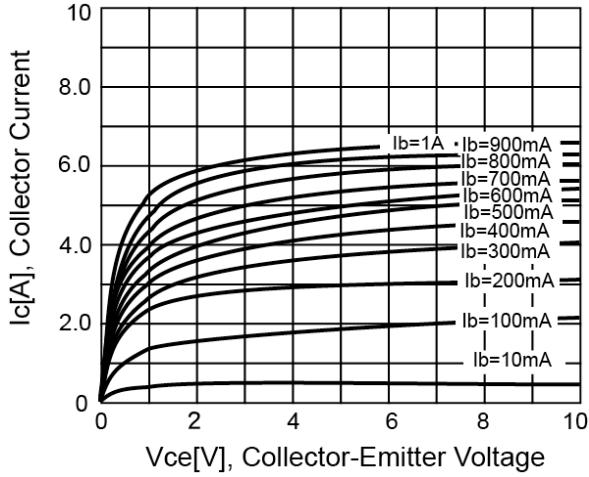


Figure 2. DC Current Gain

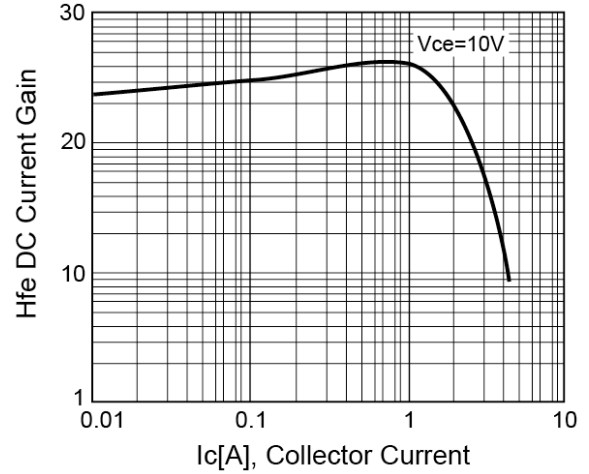


Figure 3. $V_{CE(SAT)}$ v.s. $V_{BE(SAT)}$

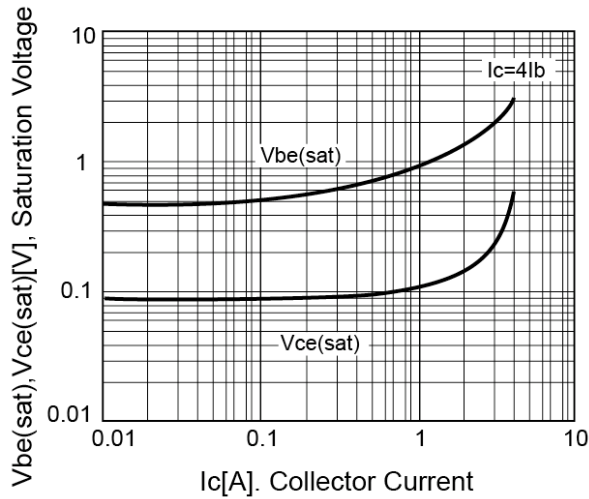


Figure 4. Power Derating

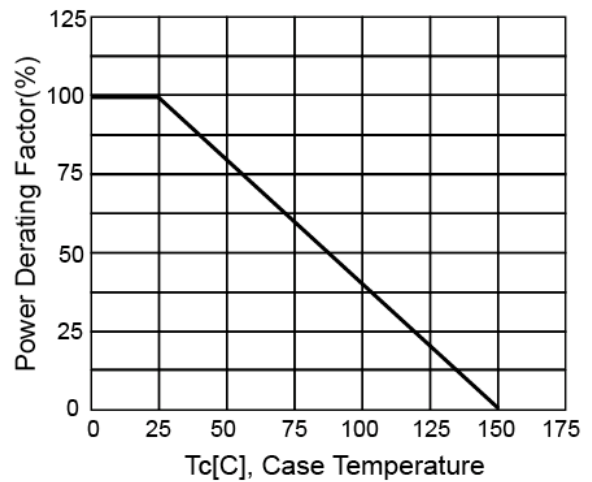


Figure 5. Reverse Bias SOA



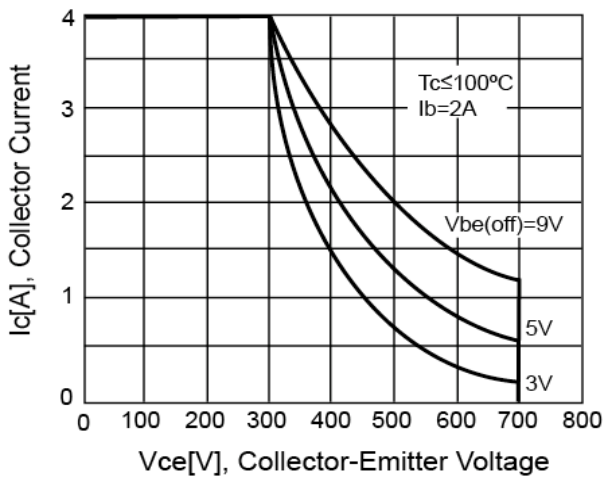


Figure 6. Safety Operating Area

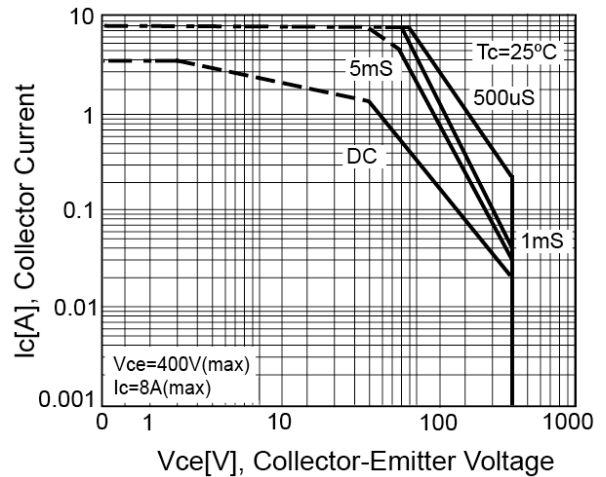


TO-220 Mechanical Drawing

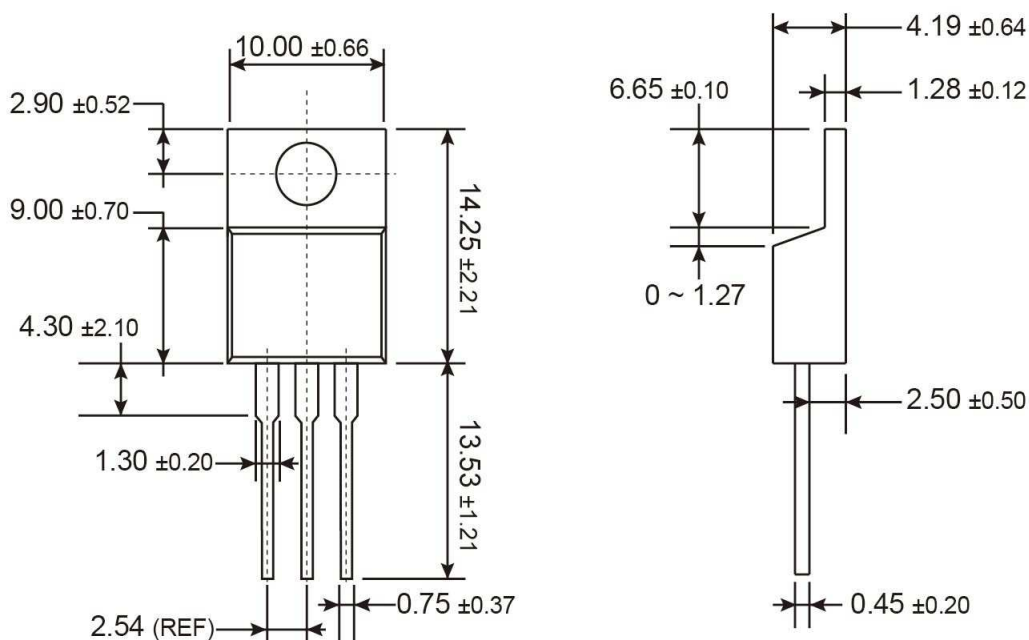


Unit: Millimeters

Marking Diagram

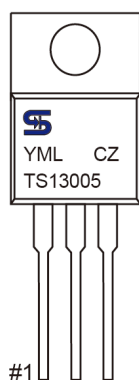


- Y** = Year Code
- M** = Month Code
 - (A=Jan, B=Feb, C=Mar, D=Apl, E=May, F=Jun, G=Jul, H=Aug, I=Sep, J=Oct, K=Nov, L=Dec)
 - = Month Code for Halogen Free Product
 - (O=Jan, P=Feb, Q=Mar, R=Apl, S=May, T=Jun, U=Jul, V=Aug, W=Sep, X=Oct, Y=Nov, Z=Dec)
- L** = Lot Code

ITO-220 Mechanical Drawing

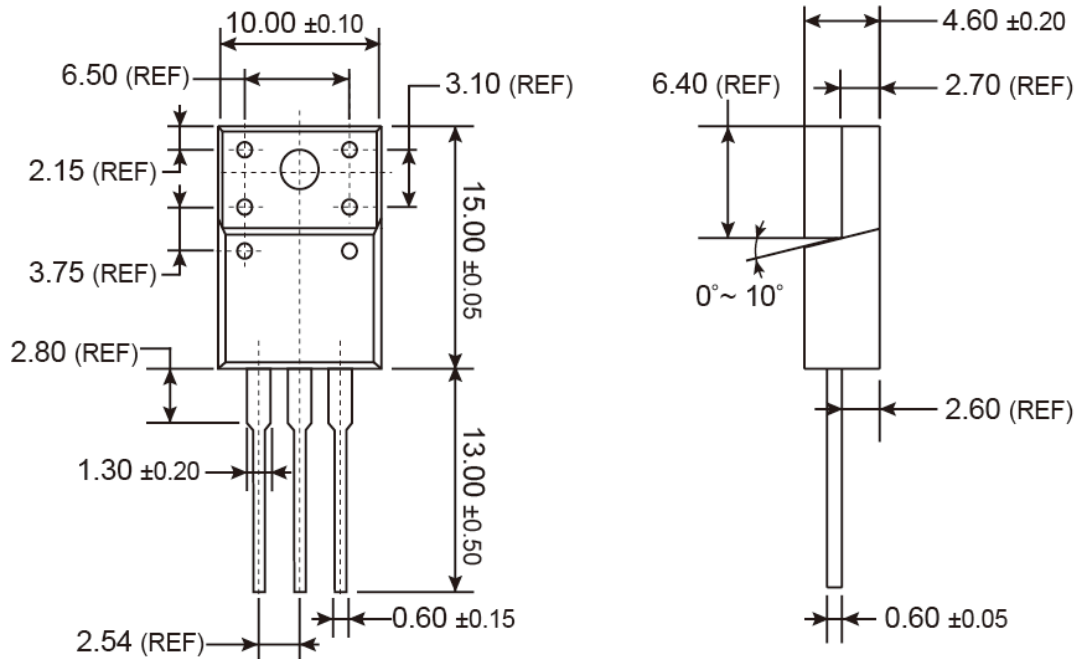

Unit: Millimeters

Marking Diagram

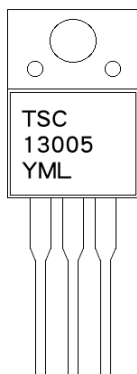

- Y** = Year Code
- M** = Month Code
 - (A=Jan, B=Feb, C=Mar, D=Apl, E=May, F=Jun, G=Jul, H=Aug, I=Sep, J=Oct, K=Nov, L=Dec)
 - = Month Code for Halogen Free Product
 - (O=Jan, P=Feb, Q=Mar, R=Apl, S=May, T=Jun, U=Jul, V=Aug, W=Sep, X=Oct, Y=Nov, Z=Dec)
- L** = Lot Code

Notice

Specifications of the products displayed herein are subject to change without notice. TSC or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, to any intellectual property rights is granted by this document. Except as provided in TSC's terms and conditions of sale for such products, TSC assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of TSC products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify TSC for any damages resulting from such improper use or sale.