




PERFORMANCE SPECIFICATION	MIN	TYP	MAX	UNITS
Lower Frequency:			1823	MHz
Upper Frequency:	1903			MHz
Tuning Voltage:	0.3		2.55	VDC
Supply Voltage:	3.23	3.4	3.57	VDC
Output Power:	+2.0	+6.0	+10.0	dBm
Supply Current:			15	mA
Harmonic Suppression (2 <sup>nd</sup> Harmonic)		-10		dBc
Pushing:			3.0	MHz/V
Pulling, all Phases:			5.0	MHz pk-pk
Tuning Sensitivity:		53		MHz/V
Phase Noise @ 10kHz offset:		-95		dBc/Hz
Phase Noise @ 100kHz offset:		-117		dBc/Hz
Load Impedance:		50		$\Omega$
Input Capacitance:			47	pF
Operating Temperature Range:	-40		+85	$^{\circ}\text{C}$
Storage Temperature Range:	-45		+90	$^{\circ}\text{C}$

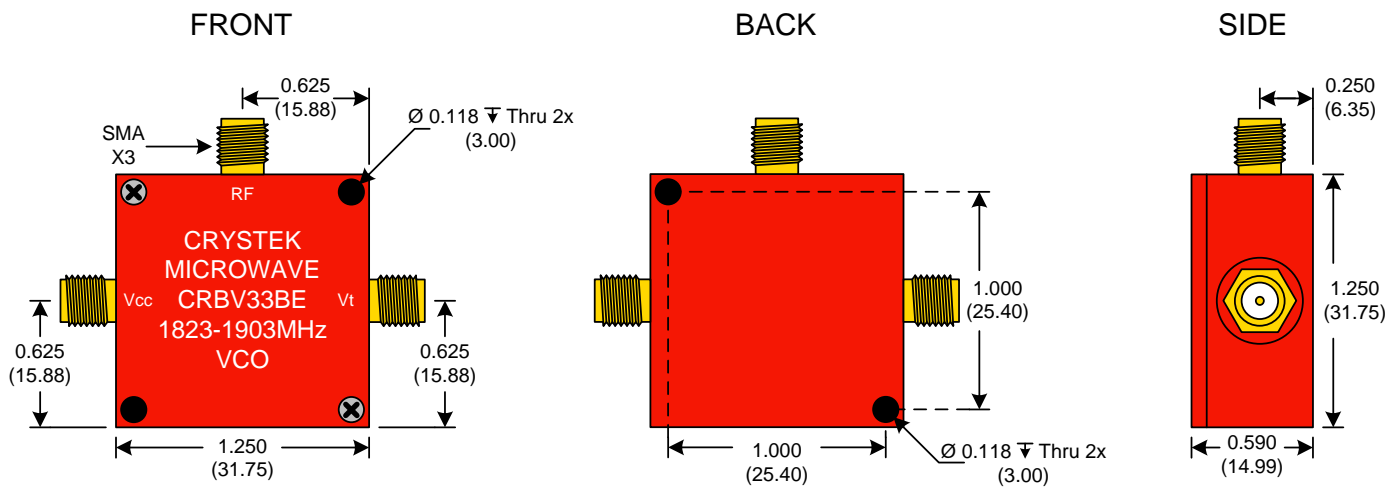


● Unless otherwise specified, Dimensions are in:  $\frac{\text{IN}}{\text{(mm)}}$

**Product Control:**


Crystek Part Number:	CRBV33BE-1823-1903	Release Date:	17-Dec-07
Revision Level:	A	Responsible:	C. Vales



Phase Noise (1 Hz BW, Typical)

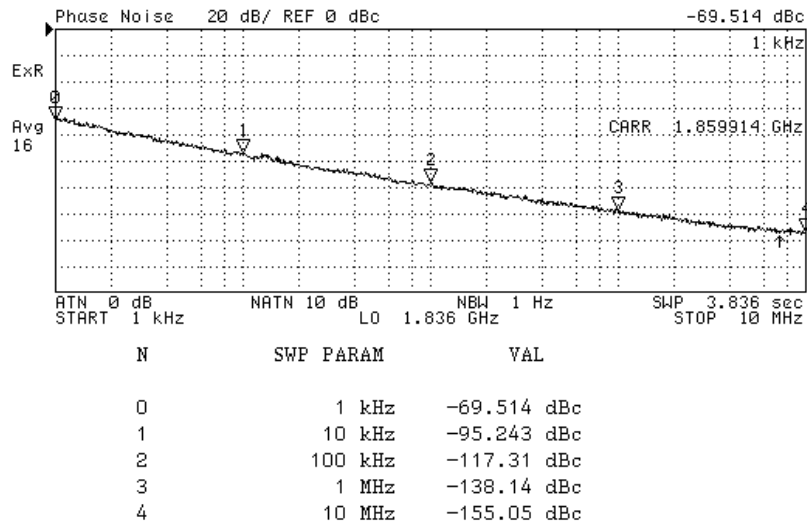

Tuning Curve (Typical)

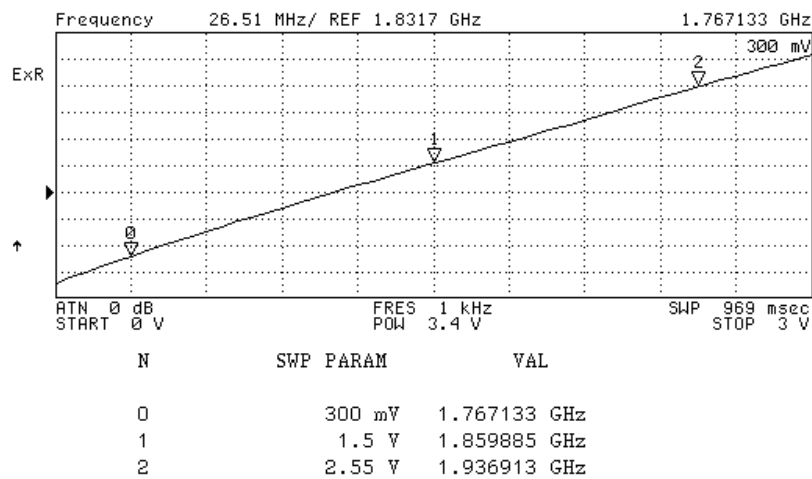

**Product Control:**

Crystek Part Number:	CRBV33BE-1823-1903	Release Date:	17-Dec-07
Revision Level:	A	Responsible:	C. Vales

Specification is subject to change without notice