

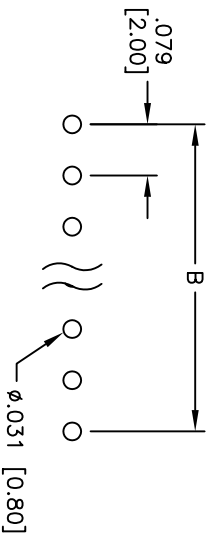
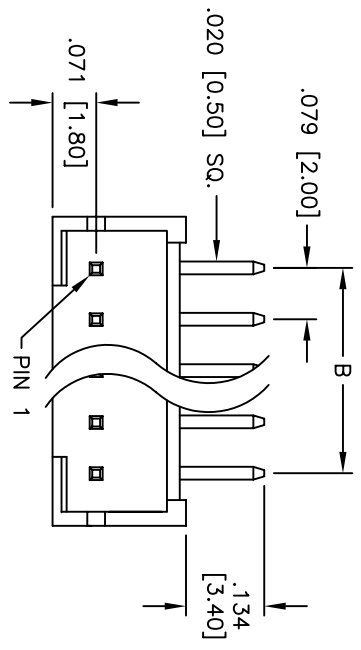


Rev	AWO #	Description	Date	Appr
-		RELEASED	4/6/05	

APPROVED: _____
 DATE: _____ TITLE: _____

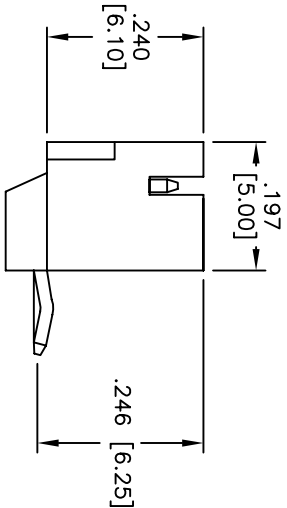

PCB LAYOUT

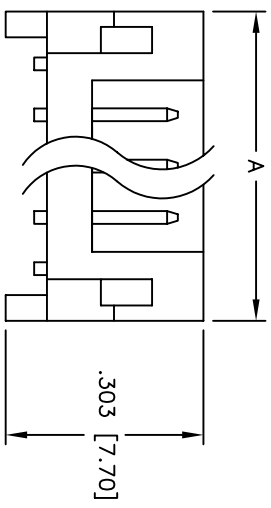

SPECIFICATIONS:
 Material: Nylon 66, rated UL 94V-0
 Insulator color: Brown
 Contacts: Brass
 Plating: Tin over Copper underplate overall

Electrical:
 Operating voltage: 100 VAC max
 Current rating: 1 Amp max
 Contact resistance: 20 mohms max
 Insulation resistance: 1,000 Mohms min @ 500 VDC
 Dielectric withstanding voltage: 1,000 VAC for 1 minute
Temperature Rating:
 Operating temperature: -25°C to +85°C
 Environmental:
 Lead free, RoHS compliant
 Recommended soldering temp: 230°C for 5 seconds



Positions: 2 thru 15
 A = .079 [2.00] x No. of Positions + .079 [2.00]
 B = .079 [2.00] x No. of Spaces

UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE INCHES [MM]
 TOLERANCES: EXCEPT AS NOTED

INCHES	HOLES
.X ± .10	ØX ± .10
.XX ± .020	ØXXX ± .015
.XXX ± .015	ØXXX ± .010

APPROVALS: _____ DATE: _____

DRAWN	SS	4/6/05
CHECKED		
APPROVED		

ADAM TECH
 909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: .079 [2.00] SHRROUDED HEADER
 RIGHT ANGLE, PCB

SIZE	PART NO.	REV.
X	2SH-B-XX-TR	-
REF:	SCALE: NTS	SHEET 1 OF 1