

# DATA SHEET

## SURFACE MOUNT MULTILAYER CERAMIC CAPACITORS

Automotive grade

NP0/X7R

6.3 V TO 2000 V

0.2 pF to 680nF

RoHS compliant & Halogen Free



## SCOPE

This specification describes Automotive grade chip capacitors with lead-free terminations and used for automotive equipments.

## APPLICATIONS

All general purpose applications under normal operation and usage conditions for automotive equipments.

## FEATURES

- AEC-Q200 qualified
- MSL class: MSL 1
- AC series soldering is compliant with J-STD-020D
- High component and equipment reliability
- The capacitors are 100% performed by automatic optical inspection prior to taping.

## ORDERING INFORMATION - GLOBAL PART NUMBER

All part numbers are identified by the series, size, tolerance, TC material, packing style, voltage, process code, termination and capacitance value.

### GLOBAL PART NUMBER

AC xxxx x x xxx x B x xxx  
(1) (2) (3) (4) (5) (6) (7)

#### (1) SIZE – INCH BASED (METRIC)

0201 (0603) / 0402 (1005) / 0603 (1608) / 0805 (2012) / 1206 (3216) / 1210 (3225) / 1812 (4532)

#### (2) TOLERANCE

|              |              |          |
|--------------|--------------|----------|
| NPO(< 10 pF) | NPO(≥ 10 pF) | X7R      |
| B = ±0.1 pF  | F = ±1%      | J = ±5%  |
| C = ±0.25 pF | G = ±2%      | K = ±10% |
| D = ±0.5 pF  | J = ±5%      | M = ±20% |

**Note:** Capacitance tolerance ±5% doesn't available for full X7R range, please contact local sale before order.

#### (3) PACKING STYLE (SEE TABLE. 9 FOR DETAIL)

R = Paper/PE taping reel; Reel 7 inch  
K = Blister taping reel; Reel 7 inch  
P = Paper/PE taping reel; Reel 13 inch  
F = Blister taping reel; Reel 13 inch

#### (4) TC MATERIAL

NPO  
X7R

#### (5) RATED VOLTAGE

|           |            |
|-----------|------------|
| 5 = 6.3 V | B = 500 V  |
| 6 = 10 V  | Z = 630 V  |
| 7 = 16 V  | C = 1000 V |
| 8 = 25 V  | D = 2000 V |
| 9 = 50 V  |            |
| 0 = 100 V |            |
| A = 200 V |            |
| Y = 250 V |            |

#### 6) PROCESS

N = NPO  
B = X7R

#### (7) CAPACITANCE VALUE

2 significant digits+number of zeros  
The 3rd digit signifies the multiplying factor, and letter R is decimal point  
Example: 121 =  $12 \times 10^1 = 120 \text{ pF}$

## CONSTRUCTION

The capacitor consists of a rectangular block of ceramic dielectric in which a number of interleaved metal electrodes are contained. This structure gives rise to a high capacitance per unit volume.

The inner electrodes are connected to the two end terminations and finally covered with a layer of plated tin (Matte Sn). The terminations are lead-free. A cross section of the structure is shown in Fig.1.

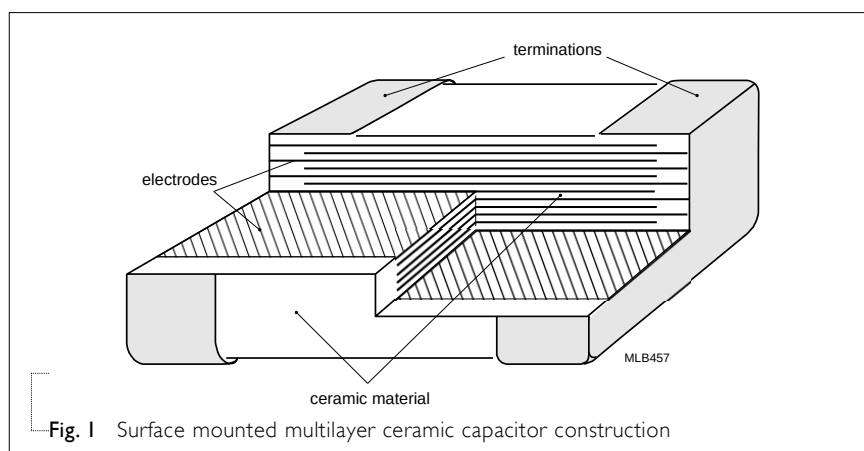


Fig. 1 Surface mounted multilayer ceramic capacitor construction

## DIMENSION

Table I For outlines see fig. 2

| TYPE | L <sub>1</sub> (mm) | W (mm)    | T (MM)                | L <sub>2</sub> / L <sub>3</sub> (mm) |      | L <sub>4</sub> (mm) |
|------|---------------------|-----------|-----------------------|--------------------------------------|------|---------------------|
|      |                     |           |                       | min.                                 | max. | min.                |
| 0201 | 0.6±0.03            | 0.3±0.03  | 0.3±0.03              | 0.10                                 | 0.20 | 0.20                |
| 0402 | 1.0±0.05            | 0.5 ±0.05 | 0.5±0.05              | 0.15                                 | 0.35 | 0.30                |
| 0603 | 1.6±0.10            | 0.8±0.10  | 0.8±0.10              | 0.20                                 | 0.60 | 0.40                |
| 0805 | 2.0±0.10            | 1.25±0.10 | 0.6±0.10              | 0.25                                 | 0.75 | 0.70                |
|      | 2.0±0.20            | 1.25±0.20 | 1.25±0.20             |                                      |      |                     |
|      | 3.2±0.15            | 1.6±0.15  | 0.6±0.10<br>0.85±0.10 |                                      |      |                     |
| 1206 | 3.2±0.30            | 1.6±0.20  | 1.00±0.10             | 0.25                                 | 0.75 | 1.40                |
|      |                     |           | 1.15± 0.10            |                                      |      |                     |
|      |                     |           | 1.25±0.20             |                                      |      |                     |
|      | 3.2±0.30            | 1.6±0.30  | 1.6±0.30              |                                      |      |                     |
| 1210 | 3.2±0.20            | 2.5±0.20  | 0.85±0.10             | 0.25                                 | 0.75 | 1.40                |
|      |                     |           | 1.25±0.20             |                                      |      |                     |
|      |                     |           | 1.6±0.20              |                                      |      |                     |
|      | 3.2±0.40            | 2.5±0.30  | 2.5±0.20              |                                      |      |                     |
| 1808 | 4.5±0.40            | 2.0±0.30  | 1.25±0.20             | 0.25                                 | 0.75 | 2.20                |
| 1812 | 4.5±0.40            | 3.2±0.30  | 0.85±0.10             | 0.25                                 | 0.75 | 2.20                |
|      |                     |           | 1.25±0.20             |                                      |      |                     |
|      |                     |           | 1.60±0.20             |                                      |      |                     |
| 2020 | 5.7±0.40            | 5.0±0.30  | 2.0±0.20              | 0.25                                 | 0.75 | 3.40                |

## OUTLINES

For dimension see Table I

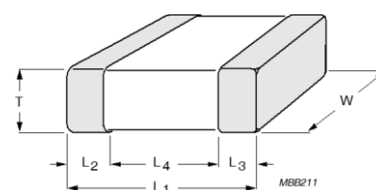


Fig. 2 Surface mounted multilayer ceramic capacitor dimension

## CAPACITANCE RANGE &amp; THICKNESS FOR NPO

Table 2 Sizes from 0201 to 0805

| CAP.    | 0201<br>25 V / 50 V | 0402<br>25 V / 50 V | 0603<br>25 V / 50 V | 100 V   | 200 V / 250 V | 0805<br>50 V | 100 V   | 200 V / 250 V |
|---------|---------------------|---------------------|---------------------|---------|---------------|--------------|---------|---------------|
| 0.2 pF  | 0.3±0.03            |                     |                     |         |               |              |         |               |
| 0.47 pF | 0.3±0.03            | 0.5±0.05            | 0.8±0.1             | 0.8±0.1 | 0.8±0.1       | 0.6±0.1      | 0.6±0.1 | 0.6±0.1       |
| 0.56 pF | 0.3±0.03            | 0.5±0.05            | 0.8±0.1             | 0.8±0.1 | 0.8±0.1       | 0.6±0.1      | 0.6±0.1 | 0.6±0.1       |
| 0.68 pF | 0.3±0.03            | 0.5±0.05            | 0.8±0.1             | 0.8±0.1 | 0.8±0.1       | 0.6±0.1      | 0.6±0.1 | 0.6±0.1       |
| 0.82 pF | 0.3±0.03            | 0.5±0.05            | 0.8±0.1             | 0.8±0.1 | 0.8±0.1       | 0.6±0.1      | 0.6±0.1 | 0.6±0.1       |
| 1.0 pF  | 0.3±0.03            | 0.5±0.05            | 0.8±0.1             | 0.8±0.1 | 0.8±0.1       | 0.6±0.1      | 0.6±0.1 | 0.6±0.1       |
| 1.2 pF  | 0.3±0.03            | 0.5±0.05            | 0.8±0.1             | 0.8±0.1 | 0.8±0.1       | 0.6±0.1      | 0.6±0.1 | 0.6±0.1       |
| 1.5 pF  | 0.3±0.03            | 0.5±0.05            | 0.8±0.1             | 0.8±0.1 | 0.8±0.1       | 0.6±0.1      | 0.6±0.1 | 0.6±0.1       |
| 1.8 pF  | 0.3±0.03            | 0.5±0.05            | 0.8±0.1             | 0.8±0.1 | 0.8±0.1       | 0.6±0.1      | 0.6±0.1 | 0.6±0.1       |
| 2.2 pF  | 0.3±0.03            | 0.5±0.05            | 0.8±0.1             | 0.8±0.1 | 0.8±0.1       | 0.6±0.1      | 0.6±0.1 | 0.6±0.1       |
| 2.7 pF  | 0.3±0.03            | 0.5±0.05            | 0.8±0.1             | 0.8±0.1 | 0.8±0.1       | 0.6±0.1      | 0.6±0.1 | 0.6±0.1       |
| 3.3 pF  | 0.3±0.03            | 0.5±0.05            | 0.8±0.1             | 0.8±0.1 | 0.8±0.1       | 0.6±0.1      | 0.6±0.1 | 0.6±0.1       |
| 3.9 pF  | 0.3±0.03            | 0.5±0.05            | 0.8±0.1             | 0.8±0.1 | 0.8±0.1       | 0.6±0.1      | 0.6±0.1 | 0.6±0.1       |
| 4.7 pF  | 0.3±0.03            | 0.5±0.05            | 0.8±0.1             | 0.8±0.1 | 0.8±0.1       | 0.6±0.1      | 0.6±0.1 | 0.6±0.1       |
| 5.6 pF  | 0.3±0.03            | 0.5±0.05            | 0.8±0.1             | 0.8±0.1 | 0.8±0.1       | 0.6±0.1      | 0.6±0.1 | 0.6±0.1       |
| 6.8 pF  | 0.3±0.03            | 0.5±0.05            | 0.8±0.1             | 0.8±0.1 | 0.8±0.1       | 0.6±0.1      | 0.6±0.1 | 0.6±0.1       |
| 8.2 pF  | 0.3±0.03            | 0.5±0.05            | 0.8±0.1             | 0.8±0.1 | 0.8±0.1       | 0.6±0.1      | 0.6±0.1 | 0.6±0.1       |
| 10 pF   | 0.3±0.03            | 0.5±0.05            | 0.8±0.1             | 0.8±0.1 | 0.8±0.1       | 0.6±0.1      | 0.6±0.1 | 0.6±0.1       |
| 12 pF   | 0.3±0.03            | 0.5±0.05            | 0.8±0.1             | 0.8±0.1 | 0.8±0.1       | 0.6±0.1      | 0.6±0.1 | 0.6±0.1       |
| 15 pF   | 0.3±0.03            | 0.5±0.05            | 0.8±0.1             | 0.8±0.1 | 0.8±0.1       | 0.6±0.1      | 0.6±0.1 | 0.6±0.1       |
| 18 pF   | 0.3±0.03            | 0.5±0.05            | 0.8±0.1             | 0.8±0.1 | 0.8±0.1       | 0.6±0.1      | 0.6±0.1 | 0.6±0.1       |
| 22 pF   | 0.3±0.03            | 0.5±0.05            | 0.8±0.1             | 0.8±0.1 | 0.8±0.1       | 0.6±0.1      | 0.6±0.1 | 0.6±0.1       |
| 27 pF   | 0.3±0.03            | 0.5±0.05            | 0.8±0.1             | 0.8±0.1 | 0.8±0.1       | 0.6±0.1      | 0.6±0.1 | 0.6±0.1       |
| 33 pF   | 0.3±0.03            | 0.5±0.05            | 0.8±0.1             | 0.8±0.1 | 0.8±0.1       | 0.6±0.1      | 0.6±0.1 | 0.6±0.1       |
| 39 pF   |                     | 0.5±0.05            | 0.8±0.1             | 0.8±0.1 | 0.8±0.1       | 0.6±0.1      | 0.6±0.1 | 0.6±0.1       |
| 47 pF   |                     | 0.5±0.05            | 0.8±0.1             | 0.8±0.1 | 0.8±0.1       | 0.6±0.1      | 0.6±0.1 | 0.6±0.1       |
| 56 pF   |                     | 0.5±0.05            | 0.8±0.1             | 0.8±0.1 | 0.8±0.1       | 0.6±0.1      | 0.6±0.1 | 0.6±0.1       |
| 68 pF   |                     | 0.5±0.05            | 0.8±0.1             | 0.8±0.1 | 0.8±0.1       | 0.6±0.1      | 0.6±0.1 | 0.6±0.1       |
| 82 pF   |                     | 0.5±0.05            | 0.8±0.1             | 0.8±0.1 | 0.8±0.1       | 0.6±0.1      | 0.6±0.1 | 0.6±0.1       |
| 100 pF  |                     | 0.5±0.05            | 0.8±0.1             | 0.8±0.1 | 0.8±0.1       | 0.6±0.1      | 0.6±0.1 | 0.6±0.1       |

## NOTE

1. Values in shaded cells indicate thickness class in mm
2. Capacitance value of non E-12 series is on request

## CAPACITANCE RANGE &amp; THICKNESS FOR NPO

Table 3 Sizes from 0402 to 0805 (continued)

| CAP.   | 0402        | 0603        | 0805    |               |          |          |               |
|--------|-------------|-------------|---------|---------------|----------|----------|---------------|
|        | 25 V / 50 V | 25 V / 50 V | 100 V   | 200 V / 250 V | 50 V     | 100 V    | 200 V / 250 V |
| 120 pF | 0.5±0.05    | 0.8±0.1     | 0.8±0.1 | 0.8±0.1       | 0.6±0.1  | 0.6±0.1  | 0.6±0.1       |
| 150 pF | 0.5±0.05    | 0.8±0.1     | 0.8±0.1 | 0.8±0.1       | 0.6±0.1  | 0.6±0.1  | 0.6±0.1       |
| 180 pF | 0.5±0.05    | 0.8±0.1     | 0.8±0.1 | 0.8±0.1       | 0.6±0.1  | 0.6±0.1  | 0.6±0.1       |
| 220 pF | 0.5±0.05    | 0.8±0.1     | 0.8±0.1 | 0.8±0.1       | 0.6±0.1  | 0.6±0.1  | 0.85±0.1      |
| 270 pF | 0.5±0.05    | 0.8±0.1     | 0.8±0.1 | 0.8±0.1       | 0.6±0.1  | 0.6±0.1  | 0.85±0.1      |
| 330 pF | 0.5±0.05    | 0.8±0.1     | 0.8±0.1 | 0.8±0.1       | 0.6±0.1  | 0.6±0.1  | 0.85±0.1      |
| 390 pF | 0.5±0.05    | 0.8±0.1     | 0.8±0.1 | 0.8±0.1       | 0.6±0.1  | 0.6±0.1  | 0.85±0.1      |
| 470 pF | 0.5±0.05    | 0.8±0.1     | 0.8±0.1 | 0.8±0.1       | 0.6±0.1  | 0.6±0.1  | 0.85±0.1      |
| 560 pF | 0.5±0.05    | 0.8±0.1     | 0.8±0.1 | 0.8±0.1       | 0.6±0.1  | 0.85±0.1 | 0.85±0.1      |
| 680 pF | 0.5±0.05    | 0.8±0.1     | 0.8±0.1 | 0.8±0.1       | 0.6±0.1  | 0.85±0.1 | 0.85±0.1      |
| 820 pF | 0.5±0.05    | 0.8±0.1     | 0.8±0.1 |               | 0.6±0.1  | 0.85±0.1 | 0.85±0.1      |
| 1.0 nF | 0.5±0.05    | 0.8±0.1     | 0.8±0.1 |               | 0.6±0.1  | 0.85±0.1 | 0.85±0.1      |
| 1.2 nF |             | 0.8±0.1     | 0.8±0.1 |               | 0.85±0.1 | 0.85±0.1 |               |
| 1.5 nF |             | 0.8±0.1     | 0.8±0.1 |               | 0.85±0.1 | 0.85±0.1 |               |
| 1.8 nF |             | 0.8±0.1     | 0.8±0.1 |               | 0.85±0.1 | 0.85±0.1 |               |
| 2.2 nF |             | 0.8±0.1     | 0.8±0.1 |               | 1.25±0.2 | 1.25±0.2 |               |
| 2.7 nF |             | 0.8±0.1     |         |               | 1.25±0.2 | 1.25±0.2 |               |
| 3.3 nF |             | 0.8±0.1     |         |               | 1.25±0.2 | 1.25±0.2 |               |
| 3.9 nF |             | 0.8±0.1     |         |               | 1.25±0.2 | 1.25±0.2 |               |
| 4.7 nF |             | 0.8±0.1     |         |               | 1.25±0.2 | 1.25±0.2 |               |
| 5.6 nF |             | 0.8±0.1     |         |               | 1.25±0.2 | 1.25±0.2 |               |
| 6.8 nF |             | 0.8±0.1     |         |               | 1.25±0.2 | 1.25±0.2 |               |
| 8.2 nF |             | 0.8±0.1     |         |               | 1.25±0.2 | 1.25±0.2 |               |
| 10 nF  |             | 0.8±0.1     |         |               | 1.25±0.2 | 1.25±0.2 |               |

## NOTE

1. Values in shaded cells indicate thickness class in mm
2. Capacitance value of non E-12 series is on request

**CAPACITANCE RANGE & THICKNESS FOR NPO****Table 4** Sizes from 1206 to 1210

| CAP.   | 1206    |         |               |          |          |          |          | 1210     |          |               |          |
|--------|---------|---------|---------------|----------|----------|----------|----------|----------|----------|---------------|----------|
|        | 50 V    | 100 V   | 200 V / 250 V | 500 V    | 630 V    | 1000 V   | 2000 V   | 50 V     | 100 V    | 200 V / 250 V | 500 V    |
| 10 pF  | 0.6±0.1 | 0.6±0.1 | 0.6±0.1       | 0.6±0.1  | 1.25±0.2 | 1.25±0.2 | 1.25±0.2 |          |          |               |          |
| 12 pF  | 0.6±0.1 | 0.6±0.1 | 0.6±0.1       | 0.6±0.1  | 1.25±0.2 | 1.25±0.2 | 1.25±0.2 |          |          |               |          |
| 15 pF  | 0.6±0.1 | 0.6±0.1 | 0.6±0.1       | 0.6±0.1  | 1.25±0.2 | 1.25±0.2 | 1.25±0.2 |          |          |               |          |
| 18 pF  | 0.6±0.1 | 0.6±0.1 | 0.6±0.1       | 0.6±0.1  | 1.25±0.2 | 1.25±0.2 | 1.25±0.2 |          |          |               |          |
| 22 pF  | 0.6±0.1 | 0.6±0.1 | 0.6±0.1       | 0.6±0.1  | 1.25±0.2 | 1.25±0.2 | 1.25±0.2 |          |          |               |          |
| 27 pF  | 0.6±0.1 | 0.6±0.1 | 0.6±0.1       | 0.6±0.1  | 1.25±0.2 | 1.25±0.2 | 1.25±0.2 |          |          |               |          |
| 33 pF  | 0.6±0.1 | 0.6±0.1 | 0.6±0.1       | 0.6±0.1  | 1.25±0.2 | 1.25±0.2 | 1.25±0.2 |          |          |               |          |
| 39 pF  | 0.6±0.1 | 0.6±0.1 | 0.6±0.1       | 0.6±0.1  | 1.25±0.2 | 1.25±0.2 | 1.25±0.2 |          |          |               |          |
| 47 pF  | 0.6±0.1 | 0.6±0.1 | 0.6±0.1       | 0.6±0.1  | 1.25±0.2 | 1.25±0.2 | 1.25±0.2 |          |          |               |          |
| 56 pF  | 0.6±0.1 | 0.6±0.1 | 0.6±0.1       | 0.6±0.1  | 1.25±0.2 | 1.25±0.2 |          |          |          |               |          |
| 68 pF  | 0.6±0.1 | 0.6±0.1 | 0.6±0.1       | 0.6±0.1  | 1.25±0.2 | 1.25±0.2 |          |          |          |               |          |
| 82 pF  | 0.6±0.1 | 0.6±0.1 | 0.6±0.1       | 0.6±0.1  | 1.25±0.2 | 1.25±0.2 |          |          |          |               |          |
| 100 pF | 0.6±0.1 | 0.6±0.1 | 0.6±0.1       | 0.6±0.1  | 1.25±0.2 | 1.25±0.2 |          |          |          |               |          |
| 120 pF | 0.6±0.1 | 0.6±0.1 | 0.6±0.1       | 0.6±0.1  | 1.25±0.2 | 1.25±0.2 |          |          |          |               |          |
| 150 pF | 0.6±0.1 | 0.6±0.1 | 0.6±0.1       | 0.6±0.1  | 1.25±0.2 | 1.25±0.2 |          |          |          |               |          |
| 180 pF | 0.6±0.1 | 0.6±0.1 | 0.6±0.1       | 0.6±0.1  | 1.25±0.2 | 1.25±0.2 |          |          |          |               |          |
| 220 pF | 0.6±0.1 | 0.6±0.1 | 0.6±0.1       | 0.6±0.1  | 1.25±0.2 | 1.25±0.2 |          |          |          |               |          |
| 270 pF | 0.6±0.1 | 0.6±0.1 | 0.6±0.1       | 0.6±0.1  | 1.25±0.2 |          |          |          |          |               |          |
| 330 pF | 0.6±0.1 | 0.6±0.1 | 0.6±0.1       | 0.6±0.1  | 1.25±0.2 |          |          |          |          |               |          |
| 390 pF | 0.6±0.1 | 0.6±0.1 | 0.6±0.1       | 0.6±0.1  | 1.25±0.2 |          |          |          |          |               |          |
| 470 pF | 0.6±0.1 | 0.6±0.1 | 0.6±0.1       | 0.6±0.1  | 1.25±0.2 |          |          |          |          |               |          |
| 560 pF | 0.6±0.1 | 0.6±0.1 | 0.6±0.1       | 0.6±0.1  | 1.25±0.2 |          |          |          |          |               |          |
| 680 pF | 0.6±0.1 | 0.6±0.1 | 0.6±0.1       | 0.6±0.1  | 1.25±0.2 |          |          |          |          |               |          |
| 820 pF | 0.6±0.1 | 0.6±0.1 | 0.85±0.1      | 0.85±0.1 | 1.25±0.2 |          |          |          |          |               |          |
| 1.0 nF | 0.6±0.1 | 0.6±0.1 | 0.85±0.1      | 0.85±0.1 | 1.25±0.2 |          |          | 1.25±0.2 | 1.25±0.2 | 1.25±0.2      | 1.25±0.2 |
| 1.2 nF | 0.6±0.1 | 0.6±0.1 | 0.85±0.1      |          |          |          |          | 1.25±0.2 | 1.25±0.2 | 1.25±0.2      | 1.25±0.2 |
| 1.5 nF | 0.6±0.1 | 0.6±0.1 | 0.85±0.1      |          |          |          |          | 1.25±0.2 | 1.25±0.2 | 1.25±0.2      | 1.25±0.2 |
| 1.8 nF | 0.6±0.1 | 0.6±0.1 |               |          |          |          |          | 1.25±0.2 | 1.25±0.2 | 1.25±0.2      | 1.25±0.2 |
| 2.2 nF | 0.6±0.1 | 0.6±0.1 |               |          |          |          |          | 1.25±0.2 | 1.25±0.2 | 1.25±0.2      |          |
| 2.7 nF | 0.6±0.1 | 0.6±0.1 |               |          |          |          |          | 1.25±0.2 | 1.25±0.2 | 1.25±0.2      |          |

**NOTE**

1. Values in shaded cells indicate thickness class in mm
2. Capacitance value of non E-12 series is on request

## CAPACITANCE RANGE &amp; THICKNESS FOR X7R

Table 5 Sizes from 0201 to 0603

| CAP.   | 0201     |          | 0402     |          |          |          |          | 0603    |         |         |         |         |
|--------|----------|----------|----------|----------|----------|----------|----------|---------|---------|---------|---------|---------|
|        | 25V      | 50 V     | 10V      | 16 V     | 25 V     | 50 V     | 100 V    | 10V     | 16 V    | 25 V    | 50 V    | 100 V   |
| 100 pF | 0.3±0.03 | 0.3±0.03 |          |          |          |          |          |         |         |         |         |         |
| 150 pF | 0.3±0.03 | 0.3±0.03 |          |          |          |          |          |         |         |         |         |         |
| 220 pF | 0.3±0.03 | 0.3±0.03 | 0.5±0.05 | 0.5±0.05 | 0.5±0.05 | 0.5±0.05 | 0.5±0.05 |         |         |         |         |         |
| 330 pF | 0.3±0.03 | 0.3±0.03 | 0.5±0.05 | 0.5±0.05 | 0.5±0.05 | 0.5±0.05 | 0.5±0.05 |         |         |         |         |         |
| 470 pF | 0.3±0.03 | 0.3±0.03 | 0.5±0.05 | 0.5±0.05 | 0.5±0.05 | 0.5±0.05 | 0.5±0.05 |         |         |         |         |         |
| 680 pF | 0.3±0.03 | 0.3±0.03 | 0.5±0.05 | 0.5±0.05 | 0.5±0.05 | 0.5±0.05 | 0.5±0.05 |         |         |         |         |         |
| 1.0 nF | 0.3±0.03 | 0.3±0.03 | 0.5±0.05 | 0.5±0.05 | 0.5±0.05 | 0.5±0.05 | 0.5±0.05 | 0.8±0.1 | 0.8±0.1 | 0.8±0.1 | 0.8±0.1 | 0.8±0.1 |
| 1.5 nF | 0.3±0.03 |          | 0.5±0.05 | 0.5±0.05 | 0.5±0.05 | 0.5±0.05 | 0.5±0.05 | 0.8±0.1 | 0.8±0.1 | 0.8±0.1 | 0.8±0.1 | 0.8±0.1 |
| 2.2 nF | 0.3±0.03 |          | 0.5±0.05 | 0.5±0.05 | 0.5±0.05 | 0.5±0.05 |          | 0.8±0.1 | 0.8±0.1 | 0.8±0.1 | 0.8±0.1 | 0.8±0.1 |
| 3.3 nF | 0.3±0.03 |          | 0.5±0.05 | 0.5±0.05 | 0.5±0.05 | 0.5±0.05 |          | 0.8±0.1 | 0.8±0.1 | 0.8±0.1 | 0.8±0.1 | 0.8±0.1 |
| 4.7 nF | 0.3±0.03 |          | 0.5±0.05 | 0.5±0.05 | 0.5±0.05 | 0.5±0.05 |          | 0.8±0.1 | 0.8±0.1 | 0.8±0.1 | 0.8±0.1 | 0.8±0.1 |
| 6.8 nF | 0.3±0.03 |          | 0.5±0.05 | 0.5±0.05 | 0.5±0.05 | 0.5±0.05 |          | 0.8±0.1 | 0.8±0.1 | 0.8±0.1 | 0.8±0.1 | 0.8±0.1 |
| 10 nF  | 0.3±0.03 |          | 0.5±0.05 | 0.5±0.05 | 0.5±0.05 | 0.5±0.05 |          | 0.8±0.1 | 0.8±0.1 | 0.8±0.1 | 0.8±0.1 | 0.8±0.1 |
| 15 nF  |          |          | 0.5±0.05 | 0.5±0.05 | 0.5±0.05 | 0.5±0.05 |          | 0.8±0.1 | 0.8±0.1 | 0.8±0.1 | 0.8±0.1 | 0.8±0.1 |
| 22 nF  |          |          | 0.5±0.05 | 0.5±0.05 | 0.5±0.05 | 0.5±0.05 |          | 0.8±0.1 | 0.8±0.1 | 0.8±0.1 | 0.8±0.1 | 0.8±0.1 |
| 33 nF  |          |          | 0.5±0.05 | 0.5±0.05 | 0.5±0.05 | 0.5±0.05 |          | 0.8±0.1 | 0.8±0.1 | 0.8±0.1 | 0.8±0.1 | 0.8±0.1 |
| 47 nF  |          |          | 0.5±0.05 | 0.5±0.05 | 0.5±0.05 | 0.5±0.05 |          | 0.8±0.1 | 0.8±0.1 | 0.8±0.1 | 0.8±0.1 | 0.8±0.1 |
| 68 nF  |          |          | 0.5±0.05 | 0.5±0.05 | 0.5±0.05 | 0.5±0.05 |          | 0.8±0.1 | 0.8±0.1 | 0.8±0.1 | 0.8±0.1 | 0.8±0.1 |
| 100 nF |          |          | 0.5±0.05 | 0.5±0.05 | 0.5±0.05 | 0.5±0.05 |          | 0.8±0.1 | 0.8±0.1 | 0.8±0.1 | 0.8±0.1 | 0.8±0.1 |
| 150 nF |          |          |          |          |          |          |          | 0.8±0.1 | 0.8±0.1 | 0.8±0.1 | 0.8±0.1 |         |
| 220 nF |          |          |          |          |          |          |          | 0.8±0.1 | 0.8±0.1 | 0.8±0.1 | 0.8±0.1 |         |
| 330 nF |          |          |          |          |          |          |          | 0.8±0.1 | 0.8±0.1 | 0.8±0.1 |         |         |
| 470 nF |          |          |          |          |          |          |          | 0.8±0.1 | 0.8±0.1 | 0.8±0.1 |         |         |
| 680 nF |          |          |          |          |          |          |          | 0.8±0.1 | 0.8±0.1 | 0.8±0.1 |         |         |

## NOTE

1. Values in shaded cells indicate thickness class in mm
2. Capacitance value of non E-6 series is on request

CAPACITANCE RANGE & THICKNESS FOR X7R

Table 6 Size 0805

| CAP.   | 0805     |          |          |                      |          |               |          |
|--------|----------|----------|----------|----------------------|----------|---------------|----------|
|        | 10 V     | 16 V     | 25 V     | 50 V                 | 100 V    | 200 V / 250 V | 500 V    |
| 1.0 nF | 0.85±0.1 | 0.85±0.1 | 0.85±0.1 | 0.85±0.1             | 0.85±0.1 | 0.85±0.1      | 0.85±0.1 |
| 1.5 nF | 0.85±0.1 | 0.85±0.1 | 0.85±0.1 | 0.85±0.1             | 0.85±0.1 | 0.85±0.1      | 0.85±0.1 |
| 2.2 nF | 0.85±0.1 | 0.85±0.1 | 0.85±0.1 | 0.85±0.1             | 0.85±0.1 | 0.85±0.1      | 0.85±0.1 |
| 3.3 nF | 0.85±0.1 | 0.85±0.1 | 0.85±0.1 | 0.85±0.1             | 0.85±0.1 | 0.85±0.1      | 0.85±0.1 |
| 4.7 nF | 0.85±0.1 | 0.85±0.1 | 0.85±0.1 | 0.85±0.1             | 0.85±0.1 | 0.85±0.1      | 0.85±0.1 |
| 6.8 nF | 0.85±0.1 | 0.85±0.1 | 0.85±0.1 | 0.85±0.1             | 0.85±0.1 | 1.25±0.2      |          |
| 10 nF  | 0.85±0.1 | 0.85±0.1 | 0.85±0.1 | 0.85±0.1             | 0.85±0.1 | 1.25±0.2      |          |
| 15 nF  | 0.85±0.1 | 0.85±0.1 | 0.85±0.1 | 0.85±0.1             | 0.85±0.1 | 1.25±0.2      |          |
| 22 nF  | 0.85±0.1 | 0.85±0.1 | 0.85±0.1 | 0.85±0.1             | 0.85±0.1 | 1.25±0.2      |          |
| 33 nF  | 0.85±0.1 | 0.85±0.1 | 0.85±0.1 | 0.85±0.1             | 1.25±0.2 |               |          |
| 47 nF  | 0.85±0.1 | 0.85±0.1 | 0.85±0.1 | 0.85±0.1             | 1.25±0.2 |               |          |
| 68 nF  | 0.85±0.1 | 0.85±0.1 | 0.85±0.1 | 0.85±0.1<br>1.25±0.2 | 1.25±0.2 |               |          |
| 100 nF | 0.85±0.1 | 0.85±0.1 | 0.85±0.1 | 0.85±0.1<br>1.25±0.2 | 1.25±0.2 |               |          |
| 150 nF | 0.85±0.1 | 0.85±0.1 | 0.85±0.1 | 1.25±0.2             |          |               |          |
| 220 nF | 0.85±0.1 | 0.85±0.1 | 0.85±0.1 | 1.25±0.2             |          |               |          |
| 330 nF | 1.25±0.2 | 1.25±0.2 | 1.25±0.2 | 1.25±0.2             |          |               |          |
| 470 nF | 1.25±0.2 | 1.25±0.2 | 1.25±0.2 | 1.25±0.2             |          |               |          |
| 680 nF | 1.25±0.2 | 1.25±0.2 | 1.25±0.2 | 1.25±0.2             |          |               |          |

**NOTE**

1. Values in shaded cells indicate thickness class in mm
2. Capacitance value of non E-6 series is on request



**CAPACITANCE RANGE & THICKNESS FOR X7R**

Table 7 Size 1206

| CAP.   | 1206     |          |          |          |          |          |               |          |          |          |
|--------|----------|----------|----------|----------|----------|----------|---------------|----------|----------|----------|
|        | 6.3 V    | 10V      | 16V      | 25V      | 50 V     | 100 V    | 200 V / 250 V | 500 V    | 630 V    | 1000 V   |
| 220 pF |          |          |          |          |          |          |               | 1.25±0.2 | 1.25±0.2 | 1.25±0.2 |
| 330 pF |          |          |          |          |          |          |               | 1.25±0.2 | 1.25±0.2 | 1.25±0.2 |
| 470 pF |          |          |          |          |          |          |               | 1.25±0.2 | 1.25±0.2 | 1.25±0.2 |
| 680 pF |          |          |          |          |          |          |               | 1.25±0.2 | 1.25±0.2 | 1.25±0.2 |
| 1 nF   |          |          |          |          |          |          |               | 1.25±0.2 | 1.25±0.2 | 1.25±0.2 |
| 2.2 nF |          |          |          |          |          |          |               | 1.25±0.2 | 1.25±0.2 |          |
| 4.7 nF |          |          |          |          |          |          |               | 1.25±0.2 | 1.25±0.2 |          |
| 10 nF  |          |          |          |          |          |          |               | 1.25±0.2 | 1.25±0.2 |          |
| 22 nF  | 0.85±0.1 | 0.85±0.1 | 0.85±0.1 | 0.85±0.1 | 0.85±0.1 | 0.85±0.1 | 1.25±0.2      |          |          |          |
| 33 nF  | 0.85±0.1 | 0.85±0.1 | 0.85±0.1 | 0.85±0.1 | 0.85±0.1 | 0.85±0.1 | 1.60±0.2      |          |          |          |
| 47 nF  | 0.85±0.1 | 0.85±0.1 | 0.85±0.1 | 0.85±0.1 | 0.85±0.1 | 0.85±0.1 | 1.60±0.2      |          |          |          |
| 68 nF  | 0.85±0.1 | 0.85±0.1 | 0.85±0.1 | 0.85±0.1 | 0.85±0.1 | 1.25±0.2 | 1.60±0.2      |          |          |          |
| 100 nF | 0.85±0.1 | 0.85±0.1 | 0.85±0.1 | 0.85±0.1 | 0.85±0.1 | 1.25±0.2 | 1.60±0.2      |          |          |          |
| 150 nF | 0.85±0.1 | 0.85±0.1 | 0.85±0.1 | 0.85±0.1 | 1.25±0.2 | 1.25±0.2 |               |          |          |          |
| 220 nF | 0.85±0.1 | 0.85±0.1 | 0.85±0.1 | 0.85±0.1 | 1.25±0.2 | 1.25±0.2 |               |          |          |          |
| 330 nF | 0.85±0.1 | 0.85±0.1 | 0.85±0.1 | 0.85±0.1 | 1.60±0.2 | 1.60±0.2 |               |          |          |          |
| 470 nF | 1.00±0.1 | 1.00±0.1 | 1.00±0.1 | 1.00±0.1 | 1.60±0.2 | 1.60±0.2 |               |          |          |          |
| 680 nF | 1.15±0.1 | 1.15±0.1 | 1.15±0.1 | 1.60±0.2 | 1.60±0.2 | 1.60±0.2 |               |          |          |          |

Table 8 Size 1210

| CAP.   | 1210     |          |          |          |          |          |               | 1812     |          |
|--------|----------|----------|----------|----------|----------|----------|---------------|----------|----------|
|        | 6.3V     | 10 V     | 16 V     | 25 V     | 50V      | 100 V    | 200 V / 250 V | 50V      | 100V     |
| 100 nF | 0.85±0.1 | 0.85±0.1 | 0.85±0.1 | 0.85±0.1 | 0.85±0.1 | 0.85±0.1 | 1.25±0.2      |          |          |
| 150 nF | 0.85±0.1 | 0.85±0.1 | 0.85±0.1 | 0.85±0.1 | 1.25±0.2 | 1.25±0.2 |               |          |          |
| 220 nF | 0.85±0.1 | 0.85±0.1 | 0.85±0.1 | 0.85±0.1 | 1.25±0.2 | 1.25±0.2 |               |          |          |
| 330 nF | 0.85±0.1 | 0.85±0.1 | 0.85±0.1 | 0.85±0.1 | 1.25±0.2 | 2.0±0.2  |               |          |          |
| 470 nF | 1.25±0.2 | 1.25±0.2 | 1.25±0.2 | 1.25±0.2 | 1.25±0.2 | 2.0±0.2  |               | 1.60±0.2 | 1.60±0.2 |
| 680 nF | 1.25±0.2 | 1.25±0.2 | 1.25±0.2 | 1.25±0.2 | 1.25±0.2 | 2.0±0.2  |               | 1.60±0.2 | 1.60±0.2 |

**NOTE**

1. Values in shaded cells indicate thickness class in mm
2. Capacitance value of non E-6 series is on request

**THICKNESS CLASSES AND PACKING QUANTITY**

Table 9

| SIZE CODE   | THICKNESS CLASSIFICATION | PACKING CODE |         | TAPE WIDTH | QUANTITY PER REEL |         |                   |         |
|-------------|--------------------------|--------------|---------|------------|-------------------|---------|-------------------|---------|
|             |                          | 7 INCH       | 13 INCH |            | Ø180 MM / 7 INCH  |         | Ø330 MM / 13 INCH |         |
|             |                          |              |         |            | Paper             | Blister | Paper             | Blister |
| <b>0201</b> | 0.3 ±0.03 mm             | R            | P       | 8 mm       | 15,000            | ---     | 50,000            | ---     |
| <b>0402</b> | 0.5 ±0.05 mm             | R            | P       | 8 mm       | 10,000            | ---     | 50,000            | ---     |
| <b>0603</b> | 0.8 ±0.1 mm              | R            | P       | 8 mm       | 4,000             | ---     | 15,000            | ---     |
| <b>0805</b> | 0.6 ±0.1 mm              | R            | P       | 8 mm       | 4,000             | ---     | 20,000            | ---     |
|             | 0.85 ±0.1 mm             | R            | P       | 8 mm       | 4,000             | ---     | 15,000            | ---     |
|             | 1.25 ±0.2 mm             | K            | F       | 8 mm       | ---               | 3,000   | ---               | 10,000  |
| <b>1206</b> | 0.6 ±0.1 mm              | R            | P       | 8 mm       | 4,000             | ---     | 20,000            | ---     |
|             | 0.85 ±0.1 mm             | R            | P       | 8 mm       | 4,000             | ---     | 15,000            | ---     |
|             | 1.0/1.15 ±0.1 mm         | K            | F       | 8 mm       | ---               | 3,000   | ---               | 10,000  |
|             | 1.25 ±0.2 mm             | K            | F       | 8 mm       | ---               | 3,000   | ---               | 10,000  |
|             | 1.60 ±0.2 mm             | K            | F       | 8 mm       | ---               | 2,000   | ---               | 8,000   |
| <b>1210</b> | 0.85 ±0.1 mm             | K            | F       | 8 mm       | ---               | 4,000   | ---               | 10,000  |
|             | 1.15 ±0.1 mm             | K            | F       | 8 mm       | ---               | 3,000   | ---               | 10,000  |
|             | 1.25 ±0.2 mm             | K            | F       | 8 mm       | ---               | 3,000   | ---               | 10,000  |
|             | 2.0 ±0.2 mm              | K            |         | 8 mm       | ---               | 2,000   | ---               | ---     |
|             | 2.5 ±0.2 mm              | K            |         | 8 mm       | ---               | 1,000   | ---               | ---     |
| <b>1812</b> | 0.6 / 0.85±0.1 mm        | K            |         | 12 mm      | ---               | 2,000   | ---               | ---     |
|             | 1.15±0.1 mm              | K            |         | 12 mm      | ---               | 1,000   | ---               | ---     |
|             | 1.25±0.2 mm              | K            |         | 12 mm      | ---               | 1,000   | ---               | ---     |
|             | 1.6 ±0.2 mm              | K            |         | 12 mm      | ---               | 2,000   | ---               | ---     |

## PAPER/PE TAPE SPECIFICATION

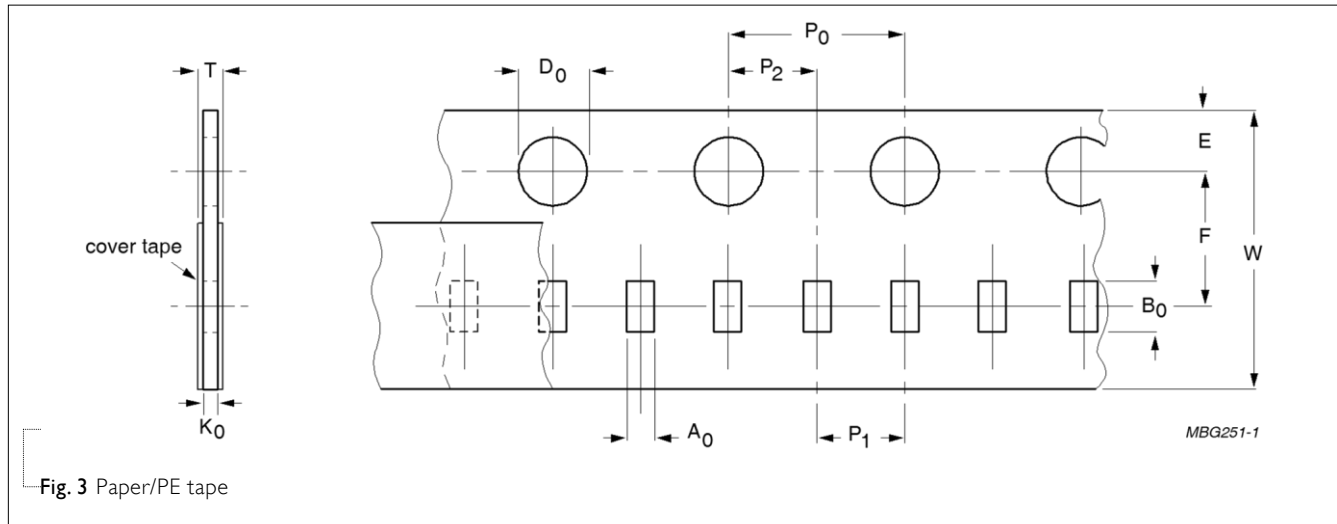


Fig. 3 Paper/PE tape

Table 10 Dimensions of paper/PE tape for relevant chip size; see Fig.3

| SIZE | SYMBOL         |                |            |            |             |                               |                |                |                 |                             | Unit: mm                    |
|------|----------------|----------------|------------|------------|-------------|-------------------------------|----------------|----------------|-----------------|-----------------------------|-----------------------------|
| CODE | A <sub>0</sub> | B <sub>0</sub> | W          | E          | F           | P <sub>0</sub> <sup>(1)</sup> | P <sub>1</sub> | P <sub>2</sub> | ØD <sub>0</sub> | K <sub>0</sub>              | T                           |
| 0201 | 0.39 ± 0.06    | 0.70 ± 0.06    | 8.0 ± 0.20 | 1.75 ± 0.1 | 3.50 ± 0.05 | 4.0 ± 0.05                    | 2.0 ± 0.05     | 2.0 ± 0.05     | 1.55 ± 0.03     | 0.38 ± 0.05                 | (0.47 / 0.55) ± 0.10        |
| 0402 | 0.70 ± 0.15    | 1.21 ± 0.12    | 8.0 ± 0.20 | 1.75 ± 0.1 | 3.50 ± 0.05 | 4.0 ± 0.05                    | 2.0 ± 0.05     | 2.0 ± 0.05     | 1.50 +0.1 / -0  | (0.75 / 0.60) ± 0.10        | (0.85 / 0.70) ± 0.10        |
| 0603 | 1.05 ± 0.14    | 1.86 ± 0.13    | 8.0 ± 0.20 | 1.75 ± 0.1 | 3.50 ± 0.05 | 4.0 ± 0.10                    | 4.0 ± 0.10     | 2.0 ± 0.05     | 1.50 +0.1 / -0  | (1.05 / 0.95 / 0.75) ± 0.10 | (1.15 / 1.05 / 0.85) ± 0.10 |
| 0805 | 1.50 ± 0.15    | 2.26 ± 0.20    | 8.0 ± 0.20 | 1.75 ± 0.1 | 3.50 ± 0.05 | 4.0 ± 0.10                    | 4.0 ± 0.10     | 2.0 ± 0.05     | 1.50 +0.1 / -0  | (1.05 / 0.95 / 0.75) ± 0.10 | (1.15 / 1.05 / 0.85) ± 0.10 |
| 1206 | 1.90 ± 0.15    | 3.50 ± 0.20    | 8.0 ± 0.20 | 1.75 ± 0.1 | 3.50 ± 0.05 | 4.0 ± 0.10                    | 4.0 ± 0.10     | 2.0 ± 0.05     | 1.50 +0.1 / -0  | (0.95 / 0.75) ± 0.10        | (1.05 / 0.85) ± 0.10        |

## NOTE

I. P<sub>0</sub> pitch tolerance over any 10 pitches is ±0.2 mm

## BLISTER TAPE SPECIFICATION

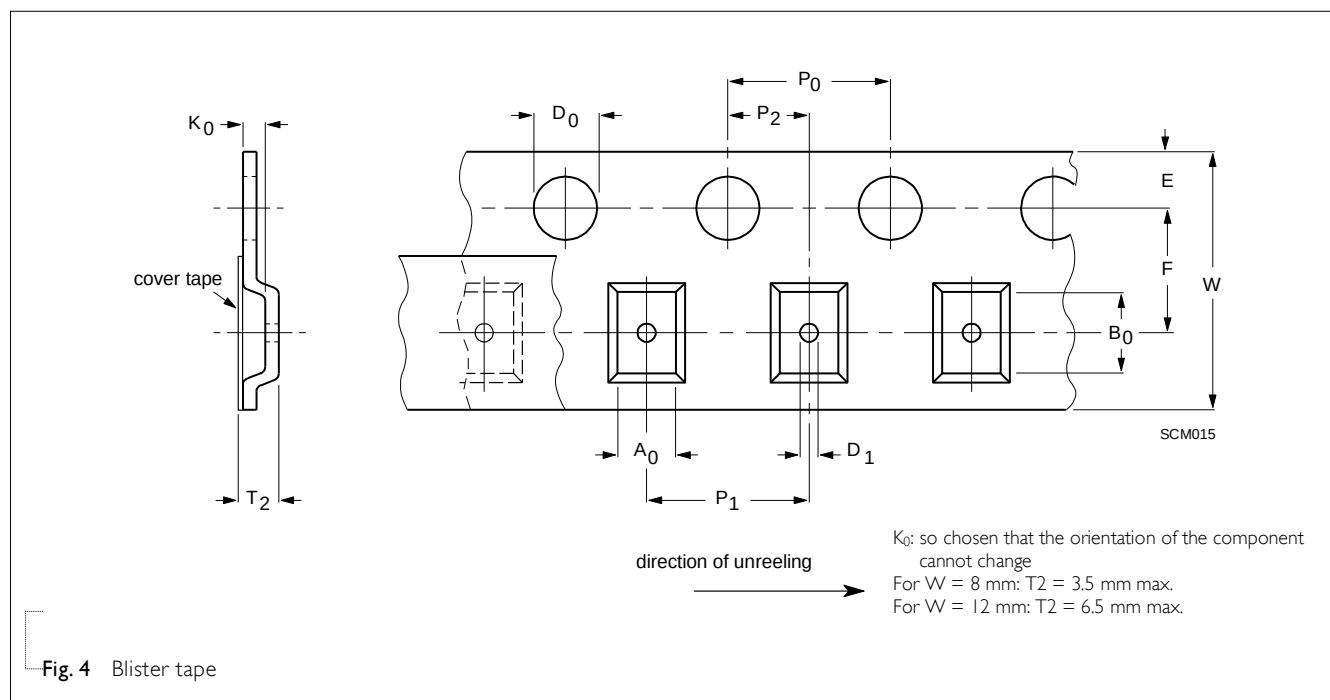


Table I I Dimensions of blister tape for relevant chip size; see Fig.4

| SIZE<br>CODE | SYMBOL         |      |                |      |                |      |            |           |           |                 |                 |                               |                |                | Unit: mm |      |
|--------------|----------------|------|----------------|------|----------------|------|------------|-----------|-----------|-----------------|-----------------|-------------------------------|----------------|----------------|----------|------|
|              | A <sub>0</sub> |      | B <sub>0</sub> |      | K <sub>0</sub> |      | W          | E         | F         | ØD <sub>0</sub> | ØD <sub>1</sub> | P <sub>0</sub> <sup>(2)</sup> | P <sub>1</sub> | P <sub>2</sub> | T2       |      |
|              | Min.           | Max. | Min.           | Max. | Min.           | Max. |            |           |           |                 | Min.            |                               |                |                | Min.     | Max. |
| 0805         | 1.29           | 1.65 | 2.09           | 2.60 | 1.25           | 1.62 | 8.1 ±0.20  | 1.75 ±0.1 | 3.5 ±0.05 | 1.5 +0.1/-0.0   | 1 +0.1/-0.0     | 4.0 ±0.10                     | 4.0 ±0.10      | 2.0 ±0.05      | 1.30     | 1.67 |
| 1206         | 1.65           | 2.12 | 3.30           | 3.75 | 1.22           | 2.15 | 8.1 ±0.20  | 1.75 ±0.1 | 3.5 ±0.05 | 1.5 +0.1/-0.0   | 1 +0.1/-0.0     | 4.0 ±0.10                     | 4.0 ±0.10      | 2.0 ±0.05      | 1.27     | 2.20 |
| 1210         | 2.55           | 3.02 | 3.31           | 3.88 | 0.97           | 2.92 | 8.1 ±0.20  | 1.75 ±0.1 | 3.5 ±0.05 | 1.5 +0.1/-0.0   | 1 +0.1/-0.0     | 4.0 ±0.10                     | 4.0 ±0.10      | 2.0 ±0.05      | 1.02     | 2.97 |
| 1808         | 2.05           | 2.55 | 4.80           | 5.45 | 1.30           | 2.45 | 12.1 ±0.20 | 1.75 ±0.1 | 5.5 ±0.05 | 1.5 +0.1/-0.0   | 1.5 +0.1/-0.0   | 4.0 ±0.10                     | 4.0 ±0.10      | 2.0 ±0.05      | 1.35     | 2.50 |
| 1812         | 3.35           | 3.75 | 4.70           | 5.33 | 0.70           | 2.40 | 12.1 ±0.20 | 1.75 ±0.1 | 5.5 ±0.05 | 1.5 +0.1/-0.0   | 1.5 +0.1/-0.0   | 4.0 ±0.10                     | 8.0 ±0.10      | 2.0 ±0.05      | 0.75     | 2.45 |

## NOTE

1. Typical capacitor displacement in pocket
2.  $P_0$  pitch tolerance over any 10 pitches is  $\pm 0.2$  mm

## REEL SPECIFICATION

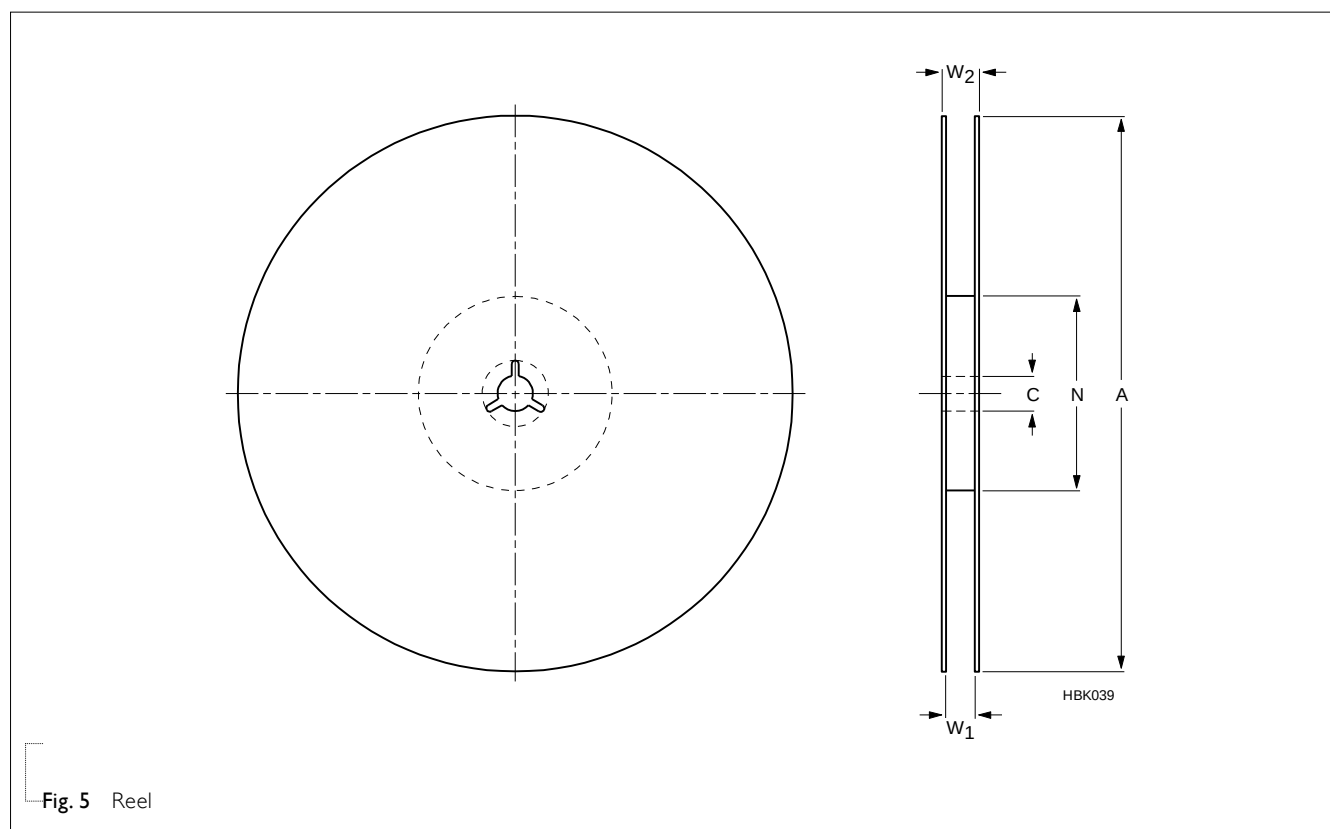


Table 12 Reel dimensions; see Fig.5

| TAPE WIDTH      | SYMBOL   |          |                | Unit: mm       |                    |
|-----------------|----------|----------|----------------|----------------|--------------------|
|                 | A        | N        | C              | W <sub>1</sub> | W <sub>2max.</sub> |
| 8 (Ø178 mm/7")  | 178 ±1.0 | 60 ±1.0  | 13 +0.50/-0.20 | 9.4 ±1.5       | 14.4               |
| 8 (Ø330 mm/13") | 330 ±1.0 | 100 ±1.0 | 13 +0.50/-0.20 | 9.0 ±0.2       | 14.4               |
| 12 (Ø178 mm/7") | 178 ±1.0 | 60 ±1.0  | 13 +0.50/-0.20 | 13.4 ±1.5      | 18.4               |

## PROPERTIES OF REEL

Material: polystyrene

Surface resistance: <10<sup>10</sup> X/sq.

## ELECTRICAL CHARACTERISTICS

## NP0/X7R DIELECTRIC CAPACITORS; NI/SIN TERMINATIONS

Unless otherwise specified, all test and measurements shall be made under standard atmospheric conditions for testing as given in 5.3 of IEC 60068-1:

- Temperature: 15 °C to 35 °C
- Relative humidity: 25% to 75%
- Air pressure: 86 kPa to 106 kPa

Before the measurements are made, the capacitor shall be stored at the measuring temperature for a time sufficient to allow the entire capacitor to reach this temperature.

The period as prescribed for recovery at the end of a test is normally sufficient for this purpose.

Table 13

| DESCRIPTION                                        |                |                |                |                                                                                           |                |                |                | VALUE                  |
|----------------------------------------------------|----------------|----------------|----------------|-------------------------------------------------------------------------------------------|----------------|----------------|----------------|------------------------|
| Capacitance range                                  |                |                |                |                                                                                           |                |                |                | 0.2 pF to 680 nF       |
| Dissipation factor (D.F.)                          |                |                |                |                                                                                           |                |                |                |                        |
| NP0                                                |                |                |                |                                                                                           |                |                |                |                        |
| C < 30 pF                                          |                |                |                |                                                                                           |                |                |                | $\leq 1 / (400 + 20C)$ |
| C ≥ 30 pF                                          |                |                |                |                                                                                           |                |                |                | ≤ 0.1 %                |
| X7R                                                | 0201           | 0402           | 0603           | 0805                                                                                      | 1206           | 1210           | 1812           |                        |
| ≤10V                                               | 220pF to 100nF | 1nF to 680nF   | 1nF to 680nF   | 22nF to 680nF                                                                             | 100nF to 680nF |                |                | ≤ 5%                   |
| 16V                                                | 220pF to 22nF  | 1nF to 220nF   | 1nF to 470nF   | 22nF to 680nF                                                                             | 100nF to 680nF |                |                | ≤ 3.5%                 |
|                                                    | 27nF to 100nF  | 470nF to 680nF | 680nF          |                                                                                           |                |                |                | ≤ 5%                   |
| 25V                                                | 100pF to 470pF | 220pF to 10nF  | 1nF to 39nF    | 1nF to 180nF                                                                              | 22nF to 680nF  | 100nF to 680nF |                | ≤ 2.5%                 |
|                                                    |                | 12nF to 27nF   | 47nF to 220nF  | 220nF                                                                                     |                |                |                | ≤ 3.5%                 |
|                                                    | 560pF to 10nF  | 33nF to 100nF  | 330nF to 680nF | 330nF to 680nF                                                                            |                |                |                | ≤ 5%                   |
| 50V                                                | 100pF to 470nF | 220pF to 10nF  | 1nF to 39nF    | 1nF to 180nF                                                                              | 22nF to 470nF  | 100nF to 680nF | 470nF to 680nF | ≤ 2.5%                 |
|                                                    | 560pF to 1nF   |                | 47nF to 220nF  | 220nF to 470nF                                                                            |                |                |                | ≤ 3.5%                 |
|                                                    |                | 12nF to 100nF  |                | 680nF                                                                                     | 680nF          |                |                | ≤ 5%                   |
| 100V                                               | 220pF to 1.5nF | 1nF to 10nF    | 1nF to 100nF   | 22nF to 470nF                                                                             | 100nF to 270nF | 470nF to 680nF |                | ≤ 2.5%                 |
|                                                    |                | 12nF to 100nF  |                | 560nF to 680nF                                                                            | 330nF to 680nF |                |                | ≤ 5%                   |
| 250V                                               |                |                | 1nF to 22nF    | 22nF to 100nF                                                                             | 100nF          |                |                | ≤ 2.5%                 |
| 500V                                               |                |                | 1nF to 4.7nF   | 220pF to 10nF                                                                             |                |                |                | ≤ 2.5%                 |
| 630V                                               |                |                |                | 220pF to 10nF                                                                             |                |                |                | ≤ 2.5%                 |
| 1KV                                                |                |                |                | 220pF to 1nF                                                                              |                |                |                | ≤ 2.5%                 |
| Insulation resistance after 1 minute at $U_r$ (DC) |                |                |                |                                                                                           |                |                |                |                        |
| General (NP0)                                      |                |                |                | $I.R. \geq 100 \text{ G}\Omega$ or $I.R. \times C \geq 1000 \Omega.F$ , whichever is less |                |                |                |                        |
| General (X7R)                                      |                |                |                | $I.R. \geq 10 \text{ G}\Omega$ or $I.R. \times C \geq 500 \Omega.F$ , whichever is less   |                |                |                |                        |
| 0603 / 25V/ 330nF to 680nF                         |                |                |                | $I.R. \times C \geq 100 \Omega.F$                                                         |                |                |                |                        |
| Operating temperature range:                       |                |                |                |                                                                                           |                |                |                |                        |
| NP0/X7R                                            |                |                |                |                                                                                           |                |                |                | -55 °C to +125 °C      |

**SOLDERING RECOMMENDATION**

Table 14

| SOLDERING METHOD | SIZE 0201   | 0402          | 0603          | 0805          | 1206          | ≥ 1210      |
|------------------|-------------|---------------|---------------|---------------|---------------|-------------|
| Reflow           | Reflow only | ≥ 0.1 $\mu$ F | ≥ 1.0 $\mu$ F | ≥ 2.2 $\mu$ F | ≥ 4.7 $\mu$ F | Reflow only |
| Reflow/Wave      |             | < 0.1 $\mu$ F | < 1.0 $\mu$ F | < 2.2 $\mu$ F | < 4.7 $\mu$ F | ---         |

**SOLDERING CONDITIONS**

The lead free MLCCs are able to stand the reflow soldering conditions as below:

- Temperature: above 220 °C
- Endurance: 95 to 120 seconds
- Cycles: 3 times

The test of "soldering heat resistance" is carried out in accordance with the schedule of "MIL-STD-202G-method 210F", "The robust construction of chip capacitors allows them to be completely immersed in a solder bath of 260 °C for 10 seconds". Therefore, it is possible to mount MLCCs on one side of a PCB and other discrete components on the reverse (mixed PCBs). Surface Mount Capacitors are tested for solderability at 245 °C during 2 seconds. The test condition for no leaching is 260°C for 30 seconds.

**TESTS AND REQUIREMENTS**

Table 15 Test procedures and requirements

| NO | AEC-Q200 TEST                 | TEST METHOD                                                                                                                                                                                                                                                                 | REQUIREMENTS                                                                                       |
|----|-------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------|
| 1  | High Temperature Exposure     | Unpowered ; 1000hours @ T=150 °C<br>Measurement at 24±2 hours after test conclusion.                                                                                                                                                                                        | No visual damage                                                                                   |
|    |                               |                                                                                                                                                                                                                                                                             | $\Delta C/C$<br>NPO: Within $\pm 2.5\%$ or 0.25 pF, whichever is greater<br>X7R: Within $\pm 10\%$ |
|    |                               |                                                                                                                                                                                                                                                                             | D.F.:<br>within initial specified value                                                            |
|    |                               |                                                                                                                                                                                                                                                                             | IR:<br>within initial specified value                                                              |
| 2  | Temperature Cycling           | Preconditioning:<br>150 +0/-10 °C for 1 hour, then keep for<br>24 $\pm$ 1 hours at room temperature<br><br>1000 cycles with following detail:<br>30 minutes at lower category temperature<br>30 minutes at upper category temperature<br><br>Recovery time 24 $\pm$ 2 hours | No visual damage                                                                                   |
|    |                               |                                                                                                                                                                                                                                                                             | $\Delta C/C$<br>NPO: Within $\pm 2.5\%$ or 0.25 pF, whichever is greater<br>X7R: $\pm 10\%$        |
|    |                               |                                                                                                                                                                                                                                                                             | D.F. meet initial specified value                                                                  |
|    |                               |                                                                                                                                                                                                                                                                             | IR meet initial specified value                                                                    |
| 3  | Destructive Physical Analysis | Electrical test not required.                                                                                                                                                                                                                                               |                                                                                                    |

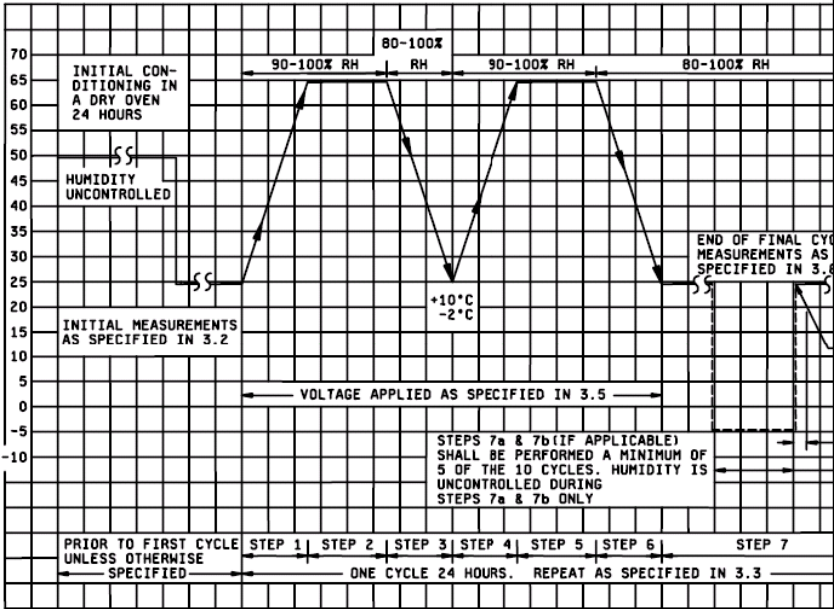
| NO | AEC-Q200 TEST       | TEST METHOD                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | REQUIREMENTS                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|----|---------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 4  | Moisture Resistance | <p>T=24 hrs/per cycle; 10 continuous cycles unpowered.<br/>Measurement at 24 ±2 hours after test condition.</p>                                                                                                                                                                                                                                                                                                                                                                                         | <p>No visual damage</p> <p><math>\Delta C/C</math><br/>NPO: Within <math>\pm 3\%</math> or 3 pF, whichever is greater<br/>X7R: <math>\pm 15\%</math></p> <p>D.F.<br/>Within initial specified value</p> <p>I.R.<br/>Meet initial specified value</p>                                                                                                                                                                                                                                                |
|    |                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| 5  | Biased Humidity     | <ol style="list-style-type: none"> <li>Preconditioning, class 2 only:<br/>150 <math>\pm 0/-10</math> °C /1 hour, then keep for 24 <math>\pm 1</math> hour at room temp</li> <li>Initial measure:<br/>Spec. refer to initial spec. C. D. I.R.<br/>Note: Series with 100 K<math>\Omega</math></li> <li>Test condition:<br/>85 °C, 85% R.H. connected with 100 K<math>\Omega</math> resistor, applied 1.5V/<math>U_r</math> (no more than 630V) for 1,000 hours.</li> <li>Recovery:<br/>NPO: 6 to 24 hours<br/>X7R: 24 <math>\pm 2</math> hours</li> <li>Final measure: C. D. I.R.</li> </ol> | <p>No visual damage after recovery</p> <p><math>\Delta C/C</math><br/>NPO: Within <math>\pm 2\%</math> or 1 pF, whichever is greater<br/>X7R: <math>\pm 15\%</math></p> <p>D.F.<br/>NPO: <math>\leq 2 \times</math> specified value.<br/>X7R:<br/>(1) <math>\leq 16V: \leq 7\%</math> or specified value whichever is greater<br/>(2) <math>\geq 25V: \leq 5\%</math> or specified value whichever is greater</p> <p>I.R.<br/>The insulation resistance shall greater than 10% of initial spec.</p> |

Fig. 6 Moisture resistant




| NO | AEC-Q200 TEST                     | TEST METHOD                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | REQUIREMENTS                                                                                                                                                      |
|----|-----------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 6  | High Temperature Operational Life | <p>1. Preconditioning, class 2 only:<br/>150 +0/-10 °C / 1 hour, then keep for<br/>24 ±1 hour at room temp</p> <p>2. Initial measure:<br/>Spec: refer to initial spec C, D, IR</p> <p>3. Endurance test:<br/>Temperature: 125 °C<br/>Specified stress voltage applied for 1,000 hours:<br/>Applied 2.0 × Ur for general products *</p> <p>High voltage series follows with below stress condition:<br/>Applied 1.5 × Ur for 200V, 250V series<br/>Applied 1.3 × Ur for 500V, 630V series<br/>Applied 1.2 × Ur for 1KV, 2KV, 3KV series</p> <p>Recovery time: 24 ±2 hours<br/>Final measure: C, D, IR</p> <p>Note: If the capacitance value is less than the minimum value permitted, then after the other measurements have been made the capacitor shall be preconditioned according to "IEC 60384 4.1" and then the requirement shall be met.</p> <p>* Applied 1.5 × Ur<br/>0402/X7R/50V/&gt;10nF<br/>0603/X7R/25V/&gt;220nF; 0603/X7R/50V/220nF<br/>0603/X7R/100V/≥100nF<br/>0805/X7R/100V/≥ 470nF</p> | No visual damage                                                                                                                                                  |
|    |                                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | $\Delta C/C$<br>NPO: Within ±2% or 1 pF, whichever is greater<br>X7R: ±15%                                                                                        |
|    |                                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | D.F.<br>NPO: ≤ 2 × specified value.<br>X7R:<br>(1) ≤ 16V: ≤ 7% or specified value whichever is greater<br>(2) ≥ 25V: ≤ 5% or specified value whichever is greater |
|    |                                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | IR<br>NPO: ≥ 4,000 MΩ or IR × Cr ≥ 40Ω.F. whichever is less<br>X7R: ≥ 1,000 MΩ or IR × Cr ≥ 50Ω.F. whichever is less *<br>* IR × Cr ≥ 10Ω.F.<br>0603/25V/>220nF   |
| 7  | External Visual                   | Any applicable method using × 10 magnification                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | In accordance with specification                                                                                                                                  |
| 8  | Physical Dimension                | Verify physical dimensions to the applicable device specification.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | In accordance with specification                                                                                                                                  |
| 9  | Mechanical Shock                  | <p>Three shocks in each direction shall be applied along the three mutually perpendicular axes of the test specimen (18 shocks)</p> <p>Peak value: 1,500 g's<br/>Duration: 0.5 ms<br/>Velocity change: 15.4 ft/s<br/>Waveform: Half-sin</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | $\Delta C/C$<br>NPO: Within ±0.5% or 0.5 pF, whichever is greater<br>X7R: ±10%                                                                                    |
|    |                                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | D.F.<br>Within initial specified value                                                                                                                            |
|    |                                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | IR<br>Within initial specified value                                                                                                                              |
| 10 | Vibration                         | <p>5 g's for 20 minutes, 12 cycles each of 3 orientations.<br/>Test from 10-2000 Hz.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | $\Delta C/C$<br>NPO: Within ±0.5% or 0.5 pF, whichever is greater<br>X7R: ±10%                                                                                    |
|    |                                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | D.F: meet initial specified value                                                                                                                                 |
|    |                                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | IR meet initial specified value                                                                                                                                   |

| NO | AEC-Q200 TEST                | TEST METHOD                                                                                                                                                                                                                                                                                                                                                                          | REQUIREMENTS                                                                                                                                                                                                                                                          |
|----|------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 11 | Resistance to Soldering Heat | Precondition: 150 +0/-10 °C for 1 hour, then keep for 24 ±1 hours at room temperature<br>Preheating: for size ≤ 1206: 120 °C to 150 °C for 1 minute<br>Preheating: for size > 1206: 100 °C to 120 °C for 1 minute and 170 °C to 200 °C for 1 minute<br>Solder bath temperature: 260±5 °C<br>Dipping time: 10±0.5 seconds<br>Recovery time: 24±2 hours                                | Dissolution of the end face plating shall not exceed 25% of the length of the edge concerned<br><br>$\Delta C/C$<br>NPO: Within ±1% or 0.5 pF, whichever is greater.<br>X7R: ±10%<br><br>D.F. within initial specified value<br><br>IR within initial specified value |
| 12 | Thermal Shock                | 1. Preconditioning, class 2 only:<br>150 +0/-10 °C /1 hour, then keep for 24±1 hour at room temp<br>2. Initial measure:<br>Spec: refer to initial spec C, D, IR<br>3. Rapid change of temperature test:<br>-55 °C to +125 °C; 300 cycles<br>15 minutes at -55°C;<br>15 minutes at 125 °C<br>4. Recovery time:<br>NPO: 6 to 24 hours<br>X7R: 24±2 hours<br>5. Final measure: C, D, IR | No visual damage<br><br>$\Delta C/C$<br>NPO: Within ±1% or 1 pF, whichever is greater<br><br>X7R: ±15%<br><br>D.F: meet initial specified value<br><br>IR meet initial specified value                                                                                |
| 13 | ESD                          | Per AEC-Q200-002<br><br><p>Note: Classify the components according to the highest ESD voltage level survived during ESD testing.</p> <p><b>Fig. 7</b> Passive component HBM ESD test flow diagram<br/>           (DC = Direct Contact Discharge, AD = Air Discharge)</p>                                                                                                             | A component passes a voltage level if all components stressed at that voltage level pass.                                                                                                                                                                             |

| NO | AEC-Q200 TEST               |                              | TEST METHOD                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | REQUIREMENTS                                                               |
|----|-----------------------------|------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------|
| 14 | Solderability               |                              | <p>1. Preheat at 155°C for 4 hours. After preheating, immerse the capacitor in a solution of ethanol and rosin (25% rosin in weight proportion). Immerse in eutectic solder solution for 5+0/-0.5 seconds at 235±5°C.</p> <p>2. Should be placed into steam aging for 8 hours±15 minutes. After preheating, immerse the capacitor in a solution of ethanol and rosin (25% rosin in weight proportion). Immerse in eutectic solder solution for 5+0/-0.5 seconds at 235±5°C.</p> <p>3. Should be placed into steam aging for 8 hours±15 minutes. After preheating, immerse the capacitor in a solution of Ethanol and rosin (25% rosin in weight proportion). Immerse in eutectic solder solution for 120±5 seconds at 260±5°C.</p> | The solder should cover over 95% of the critical area of each termination. |
| 15 | Electrical Characterization | Capacitance                  | <p><b>NPO:</b><br/> <math>f = 1 \text{ MHz}</math> for <math>C \leq 1 \text{ nF}</math>, measuring at voltage <math>1 V_{\text{rms}}</math> at 25 °C<br/> <math>f = 1 \text{ KHz}</math> for <math>C &gt; 1 \text{ nF}</math>, measuring at voltage <math>1 V_{\text{rms}}</math> at 25 °C</p> <p><b>X7R:</b><br/>           At 25 °C, 24 hours after annealing<br/> <math>f = 1 \text{ KHz}</math>, measuring at voltage <math>1 V_{\text{rms}}</math> at 25 °C</p>                                                                                                                                                                                                                                                               | Within specified tolerance                                                 |
|    |                             | Dissipation Factor (D.F.)    | <p><b>NPO:</b><br/> <math>f = 1 \text{ MHz}</math> for <math>C \leq 1 \text{ nF}</math>, measuring at voltage <math>1 V_{\text{rms}}</math> at 25 °C<br/> <math>f = 1 \text{ KHz}</math> for <math>C &gt; 1 \text{ nF}</math>, measuring at voltage <math>1 V_{\text{rms}}</math> at 25 °C</p> <p><b>X7R:</b><br/>           At 25 °C, 24 hours after annealing<br/> <math>f = 1 \text{ KHz}</math>, measuring at voltage <math>1 V_{\text{rms}}</math> at 25 °C</p>                                                                                                                                                                                                                                                               | In accordance with specification on Table 13                               |
|    |                             | Insulation Resistance (I.R.) | At $U_r$ (DC) for 1 minute                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | In accordance with specification on Table 13                               |

| NO            | AEC-Q200 TEST                                                                                                                                                                                                                                                                                                                  |                           | TEST METHOD                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | REQUIREMENTS |                 |   |      |   |                       |   |      |   |                       |   |      |                                                  |
|---------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------|-----------------|---|------|---|-----------------------|---|------|---|-----------------------|---|------|--------------------------------------------------|
| 15            | Electrical Characterization                                                                                                                                                                                                                                                                                                    | Temperature coefficient   | <p>Capacitance shall be measured by the steps shown in the following table.</p> <p>The capacitance change should be measured after 5 min at each specified temperature stage.</p> <table><tr><td>Step</td><td>Temperature(°C)</td></tr><tr><td>a</td><td>25±2</td></tr><tr><td>b</td><td>Lower temperature±3°C</td></tr><tr><td>c</td><td>25±2</td></tr><tr><td>d</td><td>Upper Temperature±2°C</td></tr><tr><td>e</td><td>25±2</td></tr></table> <p>(1) NPO</p> <p>Temperature Coefficient shall be calculated from the formula as below</p> $\text{Temp. Coefficient} = \frac{C2 - C1}{C1 \times \Delta T} \times 10^6 \text{ [ppm/°C]}$ <p>C1: Capacitance at step c<br/>C2: Capacitance at 125°C<br/>ΔT: 100°C (=125°C -25°C)</p> <p>(2) X7R</p> <p>Capacitance Change shall be calculated from the formula as below</p> $\Delta C = \frac{C2 - C1}{C1} \times 100\%$ <p>C1: Capacitance at step c<br/>C2: Capacitance at step b or d</p> | Step         | Temperature(°C) | a | 25±2 | b | Lower temperature±3°C | c | 25±2 | d | Upper Temperature±2°C | e | 25±2 | <p>ΔC/C<br/>NPO: ±30ppm /°C</p> <p>X7R: ±15%</p> |
|               |                                                                                                                                                                                                                                                                                                                                | Step                      | Temperature(°C)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |              |                 |   |      |   |                       |   |      |   |                       |   |      |                                                  |
| a             | 25±2                                                                                                                                                                                                                                                                                                                           |                           |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |              |                 |   |      |   |                       |   |      |   |                       |   |      |                                                  |
| b             | Lower temperature±3°C                                                                                                                                                                                                                                                                                                          |                           |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |              |                 |   |      |   |                       |   |      |   |                       |   |      |                                                  |
| c             | 25±2                                                                                                                                                                                                                                                                                                                           |                           |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |              |                 |   |      |   |                       |   |      |   |                       |   |      |                                                  |
| d             | Upper Temperature±2°C                                                                                                                                                                                                                                                                                                          |                           |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |              |                 |   |      |   |                       |   |      |   |                       |   |      |                                                  |
| e             | 25±2                                                                                                                                                                                                                                                                                                                           |                           |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |              |                 |   |      |   |                       |   |      |   |                       |   |      |                                                  |
| Voltage Proof | <p>1. Specified stress voltage applied for 1~5 seconds<br/>2. Ur ≤ 100 V: series applied 2.5 Ur<br/>3. 100 V &lt; Ur ≤ 200 V series applied (1.5 Ur + 100)<br/>4. 200 V &lt; Ur ≤ 500 V series applied (1.3 Ur + 100)<br/>5. Ur ≥ 500 V: 1.3 Ur<br/>6. Ur ≥ 1000 V: 1.2 Ur<br/>Charge/Discharge current is less than 50 mA</p> | No breakdown or flashover |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |              |                 |   |      |   |                       |   |      |   |                       |   |      |                                                  |
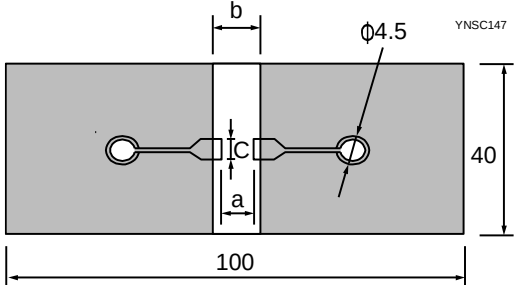
| NO   | AEC-Q200 TEST     | TEST METHOD                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | REQUIREMENTS                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |  |               |  |  |      |   |   |   |      |     |     |     |      |     |     |     |      |     |     |     |      |     |     |      |      |     |     |      |      |     |     |     |      |     |     |     |
|------|-------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|---------------|--|--|------|---|---|---|------|-----|-----|-----|------|-----|-----|-----|------|-----|-----|-----|------|-----|-----|------|------|-----|-----|------|------|-----|-----|-----|------|-----|-----|-----|
| 16   | Board Flex        | <p>Part mounted on a 100mm × 40mm FR4 PCB board, which is <math>1.6 \pm 0.2</math> mm thick and has a layer-thickness <math>35 \mu\text{m} \pm 10 \mu\text{m}</math>. Part should be mounted using the following soldering reflow profile.</p> <p>Conditions:</p> <p><b>NPO:</b><br/>Bending 3 mm at a rate of 1 mm/s, radius jig 340 mm</p> <p><b>X7R:</b><br/>Bending 2 mm at a rate of 1 mm/s, radius jig 340 mm</p> <p>Test Substrate:</p>  <p style="text-align: right;">unit: mm</p> | <p><math>\Delta C/C</math></p> <p>NPO: Within <math>\pm 1\%</math> or 0.5 pF, whichever is greater</p> <p>X7R: <math>\pm 10\%</math></p> <table border="1"> <thead> <tr> <th></th><th colspan="3">Dimension(mm)</th></tr> <tr> <th>Type</th><th>a</th><th>b</th><th>c</th></tr> </thead> <tbody> <tr> <td>0201</td><td>0.3</td><td>0.9</td><td>0.3</td></tr> <tr> <td>0402</td><td>0.4</td><td>1.5</td><td>0.5</td></tr> <tr> <td>0603</td><td>1.0</td><td>3.0</td><td>1.2</td></tr> <tr> <td>0805</td><td>1.2</td><td>4.0</td><td>1.65</td></tr> <tr> <td>1206</td><td>2.2</td><td>5.0</td><td>1.65</td></tr> <tr> <td>1210</td><td>2.2</td><td>5.0</td><td>2.0</td></tr> <tr> <td>1808</td><td>3.5</td><td>7.0</td><td>3.7</td></tr> </tbody> </table> |  | Dimension(mm) |  |  | Type | a | b | c | 0201 | 0.3 | 0.9 | 0.3 | 0402 | 0.4 | 1.5 | 0.5 | 0603 | 1.0 | 3.0 | 1.2 | 0805 | 1.2 | 4.0 | 1.65 | 1206 | 2.2 | 5.0 | 1.65 | 1210 | 2.2 | 5.0 | 2.0 | 1808 | 3.5 | 7.0 | 3.7 |
|      | Dimension(mm)     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |  |               |  |  |      |   |   |   |      |     |     |     |      |     |     |     |      |     |     |     |      |     |     |      |      |     |     |      |      |     |     |     |      |     |     |     |
| Type | a                 | b                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | c                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |  |               |  |  |      |   |   |   |      |     |     |     |      |     |     |     |      |     |     |     |      |     |     |      |      |     |     |      |      |     |     |     |      |     |     |     |
| 0201 | 0.3               | 0.9                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | 0.3                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |  |               |  |  |      |   |   |   |      |     |     |     |      |     |     |     |      |     |     |     |      |     |     |      |      |     |     |      |      |     |     |     |      |     |     |     |
| 0402 | 0.4               | 1.5                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | 0.5                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |  |               |  |  |      |   |   |   |      |     |     |     |      |     |     |     |      |     |     |     |      |     |     |      |      |     |     |      |      |     |     |     |      |     |     |     |
| 0603 | 1.0               | 3.0                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | 1.2                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |  |               |  |  |      |   |   |   |      |     |     |     |      |     |     |     |      |     |     |     |      |     |     |      |      |     |     |      |      |     |     |     |      |     |     |     |
| 0805 | 1.2               | 4.0                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | 1.65                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |  |               |  |  |      |   |   |   |      |     |     |     |      |     |     |     |      |     |     |     |      |     |     |      |      |     |     |      |      |     |     |     |      |     |     |     |
| 1206 | 2.2               | 5.0                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | 1.65                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |  |               |  |  |      |   |   |   |      |     |     |     |      |     |     |     |      |     |     |     |      |     |     |      |      |     |     |      |      |     |     |     |      |     |     |     |
| 1210 | 2.2               | 5.0                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | 2.0                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |  |               |  |  |      |   |   |   |      |     |     |     |      |     |     |     |      |     |     |     |      |     |     |      |      |     |     |      |      |     |     |     |      |     |     |     |
| 1808 | 3.5               | 7.0                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | 3.7                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |  |               |  |  |      |   |   |   |      |     |     |     |      |     |     |     |      |     |     |     |      |     |     |      |      |     |     |      |      |     |     |     |      |     |     |     |
| 17   | Terminal Strength | <p>With the component mounted on a PCB obtained with the device to be tested, apply a 17.7N (1.8Kg) force to the side of a device being tested.</p> <p>This force shall be applied for 60+ 1 seconds.</p> <p>Also the force shall be applied gradually as not to apply a shock to the component being tested.</p> <p>* Apply 2N force for 0402 size.</p> <p>* Apply 1N force for 0201 size.</p>                                                                                                                                                                               | <p>Magnification of 20X or greater may be employed for inspection of the mechanical integrity of the device body, terminals and body/terminal junction.</p> <p>Before, during and after the test, the device shall comply with all electrical requirements stated in this specification.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                             |  |               |  |  |      |   |   |   |      |     |     |     |      |     |     |     |      |     |     |     |      |     |     |      |      |     |     |      |      |     |     |     |      |     |     |     |
| 18   | Beam Load Test    | <p>Place the part in the beam load fixture. Apply a force until the part breaks or the minimum acceptable force level required in the user specification(s) is attained.</p>                                                                                                                                                                                                                                                                                                                                                                                                  | <p><math>\leq 0805</math></p> <p>Thickness &gt; 0.5mm: 20N</p> <p>Thickness <math>\leq 0.5</math>mm: 8N</p> <p><math>\geq 1206</math></p> <p>Thickness <math>\geq 1.25</math> mm: 54N</p> <p>Thickness &lt; 1.25 mm: 15N</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |  |               |  |  |      |   |   |   |      |     |     |     |      |     |     |     |      |     |     |     |      |     |     |      |      |     |     |      |      |     |     |     |      |     |     |     |

REVISION HISTORY

| REVISION   | DATE          | CHANGE NOTIFICATION | DESCRIPTION                                                                                                                                                                                                                      |
|------------|---------------|---------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Version 17 | Jan. 14, 2022 | -                   | - Add 1206/NPO/2000V/10pF to 47pF                                                                                                                                                                                                |
| Version 16 | Nov. 17, 2021 | -                   | - Add 1206/X7R/500V to 1000V/220pF to 1nF                                                                                                                                                                                        |
| Version 15 | Oct. 12, 2021 | -                   | - Add 0603/NPO/25V/50V/2.7nF to 10nF<br>- I.R. for NPO change to "I.R. $\geq 100\text{ G}\Omega$ or I.R. $\times C \geq 1000\Omega\cdot\text{F}$ , whichever is less"                                                            |
| Version 14 | Aug. 09, 2021 | -                   | - Add 1206/NPO/1kV/10pF to 220pF<br>1206/X7R/1kV/1nF                                                                                                                                                                             |
| Version 13 | Jun. 08, 2021 | -                   | - Move out "Array" and "High Cap" to individual specification<br>Add 0603 NPO 50V/100V 1.2nF to 2.2nF<br>0402 X7R 50V 15nF to 100nF<br>0603 X7R 25V 330nF to 680nF<br>0603 X7R 50V 150nF to 220nF<br>0603 X7R 100V 68nF to 100nF |
| Version 12 | Feb. 26, 2021 | -                   | - Add 0201/ X7R/ 50V / 100 pF to 1nF<br>0603/ X7R/ 16V / 680nF to 1 $\mu\text{F}$<br>0603/ X7R/ 25V / 150nF / 220nF/ 1 $\mu\text{F}$<br>1210/ X7R/ 50V / 4.7 $\mu\text{F}$                                                       |
| Version 11 | Jun. 29, 2018 | -                   | - Add 0201 NPO 25V/ 50V, 0.2pF to 33pF, Add 0402 NPO 50V 270pF to 1nF, Add 0805 X7R 25V 2.2uF                                                                                                                                    |
| Version 10 | May. 2, 2018  | -                   | - Add 0603 NPO 100V 820pF to 1nF,<br>- Add 0805 NPO 50V to 100V, 1.2nF to 10nF,<br>- Add 0805 X7R 16V 2.2uF, 50V 680nF to 1uF,<br>- Add 1206 X7R 100V 330nF to 2.2uF, 250V 33nF to 100nF                                         |
| Version 9  | Mar. 22, 2018 | -                   | - Add 0402 X7R 100nF 25~50V                                                                                                                                                                                                      |
| Version 8  | Nov. 22, 2017 | -                   | - Add X7R/0201/25V/100pF~10nF                                                                                                                                                                                                    |
| Version 7  | Jul. 7, 2017  | -                   | - Add X7R/0805/330nF to 470nF/50V, X7R/1206/10uF/6.3V                                                                                                                                                                            |
| Version 6  | Mar. 31, 2017 | -                   | - Add NPO/0603/1nF/50V, X7R/0603/1uF/10V, X7R/0603/470nF/16V, X7R/0603/220nF/25V                                                                                                                                                 |
| Version 5  | Nov. 15, 2016 | -                   | - Add Soldering Condition                                                                                                                                                                                                        |
| Version 4  | Jun. 14, 2016 | -                   | - Add X7R/0805/2.2uF/10V and NPO/1206/1.2nF to 1.5nF/250V                                                                                                                                                                        |
| Version 3  | Jul. 21, 2015 | -                   | - Tests and Requirements update                                                                                                                                                                                                  |
| Version 2  | Jul. 17, 2014 | -                   | - Tests and Requirements update                                                                                                                                                                                                  |
| Version 1  | Apr. 19, 2013 | -                   | - Capacitance range update                                                                                                                                                                                                       |
| Version 0  | Dec. 25, 2012 | -                   | - New                                                                                                                                                                                                                            |

## LEGAL DISCLAIMER

YAGEO, its distributors and agents (collectively, "YAGEO"), hereby disclaims any and all liabilities for any errors, inaccuracies or incompleteness contained in any product related information, including but not limited to product specifications, datasheets, pictures and/or graphics. YAGEO may make changes, modifications and/or improvements to product related information at any time and without notice.

YAGEO makes no representation, warranty, and/or guarantee about the fitness of its products for any particular purpose or the continuing production of any of its products. To the maximum extent permitted by law, YAGEO disclaims (i) any and all liability arising out of the application or use of any YAGEO product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for a particular purpose, non-infringement and merchantability.

YAGEO products are designed for general purpose applications under normal operation and usage conditions. Please contact YAGEO for the applications listed below which require especially high reliability for the prevention of defects which might directly cause damage to the third party's life, body or property: Aerospace equipment (artificial satellite, rocket, etc.), Atomic energy-related equipment, Aviation equipment, Disaster prevention equipment, crime prevention equipment, Electric heating apparatus, burning equipment, Highly public information network equipment, data-processing equipment, Medical devices, Military equipment, Power generation control equipment, Safety equipment, Traffic signal equipment, Transportation equipment and Undersea equipment, or for any other application or use in which the failure of YAGEO products could result in personal injury or death, or serious property damage.

Information provided here is intended to indicate product specifications only. YAGEO reserves all the rights for revising this content without further notification, as long as products are unchanged. Any product change will be announced by PCN.