



THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

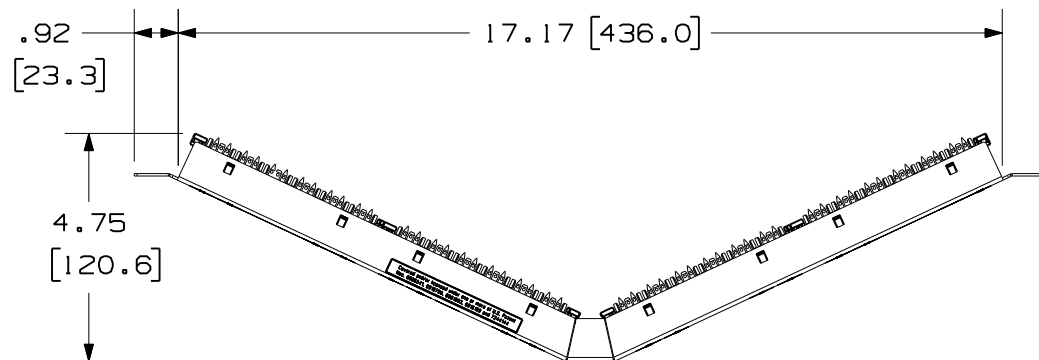

PANDUIT PART NUMBER	WEIGHT
DPA486X88TG	2.36 lb (1070.48 g)

NOTES:

- SEE CURRENT CATALOG FOR VARIOUS APPLICATIONS AS WELL AS OPTIONAL ICONS.
- MATERIAL:
PANEL HOUSING: STEEL
RJ45 MODULES: THERMOPLASTIC RESIN UL94V-0
PUNCHDOWN BLOCKS: THERMOPLASTIC RESIN UL94V-0
BEZEL ASSEMBLY: THERMOPLASTIC RESIN UL94H-B
RETENTION CAP: THERMOPLASTIC RESIN UL94V-0
- 48 PORT ANGLED PATCH PANEL 8 POSITION 8 WIRE.
- THE PATCH PANEL IS DESIGNED FOR MOUNTING TO 19" UNIVERSAL RACKS.
- FOUR (4) 12-24 X 1/2" ROUND HEAD SCREWS AND (4) M6x1x15MM METRIC SCREWS ARE PROVIDED FOR FASTENING TO RACKS.
- DIMENSIONS IN BRACKETS ARE IN METRIC.
- USE 110 STYLE TERMINATION TOOL FOR PUNCHDOWN.
- RETENTION CAPS (ONE PER CONNECTOR) PROVIDED FOR SNAP-IN ON TERMINATED CONNECTORS.

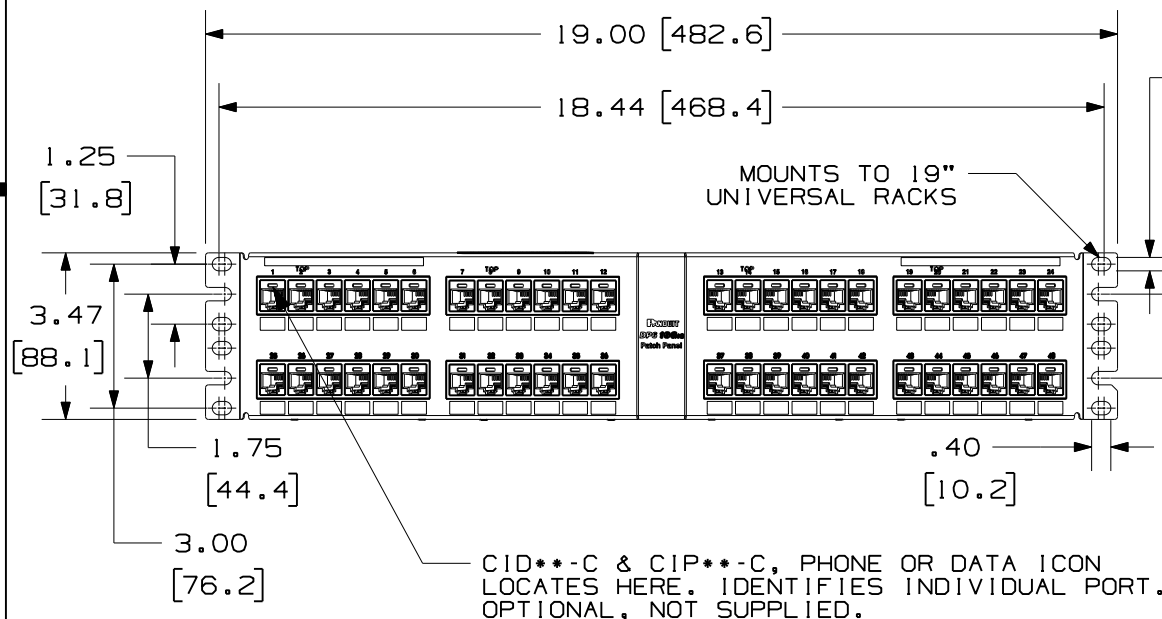

MODEL FILENAME MO2088AD/06		SIZE A
DRAWING FILENAME MO24791Z_DC236/00B		
DP6A 10GIG 48 PORT ANGLED PATCH PANEL CUSTOMER DRAWING		
PANDUITTM CORP. TINLEY PARK, ILL 60477	I.I. NUMBER	
	PRODUCT SPEC	
THIRD ANGLE PROJECTION	WORK INSTRUCTION	
	SCALE .25 : 1	
DRAWN BY LZ	REVIEW DRAWING NUMBERS	
DATE 3-4-06	PART NO. SEE CHART	
CHK'D CEF	DRAWING NO. 02479-236	

REV	DATE	BY	CHK	DESCRIPTION	ECN	R	CUST	SUP	OTH
I	12-2-08	BJN	EJH	A. DP6A WAS DP6	02479-236				
R	3-4-06	LZ	CEF	RELEASED TO PRODUCTION	02479-236	CEF	CEF		CEF