

RR2-S06/D06

- 24 Pin DIL Package
- Wide 2:1 Input Range
- 1500VDC Isolation
- Up to 3500VDC Isolation
- Continuous Short Circuit Protection
- Efficiency up to 81%
- Operating Temperature Range
-40° ~ +85°C
- Plastic Case Standard , Optional Metal Case



RoHS

OUTPUT SPECIFICATION	ENVIRONMENTAL SPECIFICATION
Voltage accuracy: ±1%	Operating Temperature range: -40°C ~+85°C (see Derating Curve)
Line regulation: Single &Dual ±0.5% max.	Maximum Case Temperature: 100°C
Short Circuit Protection : Continuous	Storage Temperature : -40°C ~+125°C
Ripple noise (20Mhz bandwidth): 60mV pk-pk	Cooling : Nature Convection
Temperature coefficient: ±0.02% °C	
Capacitor load: See table	
INPUT SPECIFICATIONS	PHYSICAL SPECIFICATIONS:
Voltage Range: See table	Case Material: Non-conductive Black Plastic (UL94V-0 rated)
Max. Input Current: See table	Nickel-coated Copper
No-Load/Full-Load Input Current: See table	PIN Material: Ø 0.5mm Brass Solder coated
Input Filter: PI Type	Potting Material: Epoxy (UL94V-0 rated)
Input Reflected Ripple Current : 35mA pk-pk	Weight Case-DIP: 12.5 (plastic), 15.0g (Metal)
GENERAL SPECIFICATIONS	Dimmension DIP: 1.25" x 0.8" x 0.4"
Efficiency: See table typ.	ABSOLUTE MAXIMUM RATINGS V(1)
I/O Isolation Voltage Metal Case (3 sec.): 1000VDC	Input Surge Voltage (100ms)/
I/O Isolation Voltage (3 sec.): 1000 ~ 3500VDC	12V Models: 24VDC max.
I/O Isolation Capacitance: 60pF typ.	24V Models: 40VDC max.
I/O Isolation Resistance: 1000M Ohm	48V Models: 80VDC max.
Switching Frequency: 100 ~ 400kHz	Soldering Temperature: 260°C max. ⁽²⁾
Humidity: 95% rel H	EMC SPECIFICATIONS
Reliability Calculated MTBF : > 1.00Mhrs (MIL-HDBK-217 f)	Radiated-/Conducted Emissions: EN55022 Class A
Safety Standard: (designed to meet): IEC 60950-1	ESD: IEC 61000-4-2 Perf.Criteria A
	RS: IEC 61000-4-3 Perf.Criteria A
	EFT: IEC 61000-4-4 Perf.Criteria A
	SURGE: IEC 61000-4-5 Perf.Criteria A
	CS: IEC 61000-4-6 Perf.Criteria A
	PFMF IEC 61000-4-8 Perf.Criteria A

1) These are stress ratings. Exposure of devices to any of these conditions may adversely affect long-term reliability.



2) (1.5mm from case 10sec Max.)

3) All specifications typical at TA= 25°C, nominal input voltage and full load unless otherwise specified.

4) The information and specification contained in this data sheet are believed to be correct at time of publication. However RSG accepts no responsibility for consequences arising from printing errors or inaccuracies. Specifications are subject to change without notice.

RR2-S06/D06

NUMBER STRUCTURE

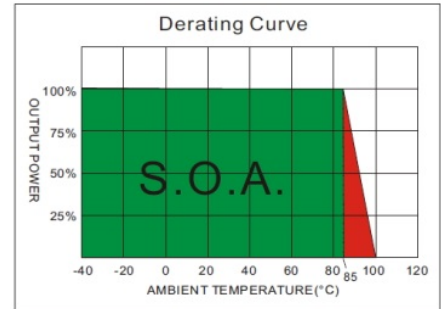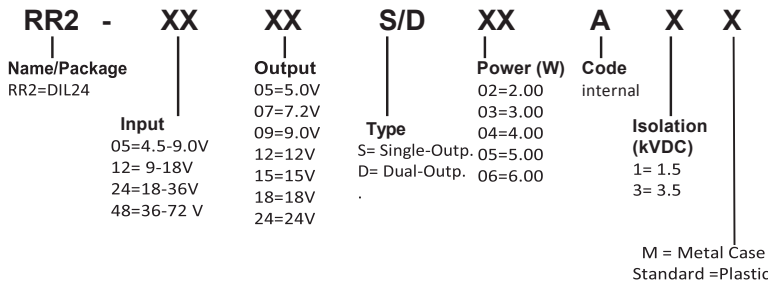


MODEL SELECTION GUIDE

MODEL NUMBER	INPUT Voltage Range (Vdc)	INPUT Current		OUTPUT Voltage (Vdc)	OUTPUT Current		EFFICIENCY @FL(%)	Capacitor Load(µF)
		No-Load (mA)	Full Load (mA)		Min. load (mA)	Full load (mA)		
RR2-1205S06AX	9-18	20	735	5	300	1200	68	2200
RR2-1209S06AX	9-18	20	694	9	167	666	72	470
RR2-1212S06AX	9-18	20	676	12	125	500	74	470
RR2-1215S06AX	9-18	20	633	15	100	400	79	470
RR2-1224S06AX	9-18	20	658	24	63	250	76	220
RR2-1205D06AX	9-18	20	649	±5	150	600	78	±1000
RR2-1209D06AX	9-18	20	641	±9	83	333	78	±220
RR2-1212D06AX	9-18	20	641	±12	63	250	78	±220
RR2-1215D06AX	9-18	20	625	±15	50	200	80	±220
RR2-1224D06AX	9-18	20	641	±24	31	125	78	±100
RR2-2405S06AX	18-36	12	329	5	300	1200	76	2200
RR2-2409S06AX	18-36	12	312	9	167	666	80	470
RR2-2412S06AX	18-36	12	312	12	125	500	80	470
RR2-2415S06AX	18-36	12	308	15	100	400	81	470
RR2-2424S06AX	18-36	12	325	24	63	250	77	220
RR2-2405D06AX	18-36	12	329	±5	150	600	76	±1000
RR2-2409D06AX	18-36	12	325	±9	83	333	77	±220
RR2-2412D06AX	18-36	12	312	±12	63	250	80	±220
RR2-2415D06AX	18-36	12	312	±15	50	200	80	±220
RR2-2424D06AX	18-36	12	321	±24	31	125	78	±100
RR2-4805S06AX	36-72	8	169	5	300	1200	74	2200
RR2-4809S06AX	36-72	8	162	9	167	666	77	470
RR2-4812S06AX	36-72	8	162	12	125	500	77	470
RR2-4815S06AX	36-72	8	158	15	100	400	79	470
RR2-4824S06AX	36-72	8	167	24	63	250	75	220
RR2-4805D06AX	36-72	8	169	±5	150	600	74	±1000
RR2-4809D06AX	36-72	8	164	±9	83	333	76	±220
RR2-4812D06AX	36-72	8	164	±12	63	250	76	±220
RR2-4815D06AX	36-72	8	160	±15	50	200	78	±220
RR2-4824D06AX	36-72	8	162	±24	31	125	77	±100

Suffix "3" means 3.5KVdc isolation
Suffix "M" means Metal Case instead of standard Plastic case

STAND Juni 2016 Rev 01

TEST CONFIGURATIONS

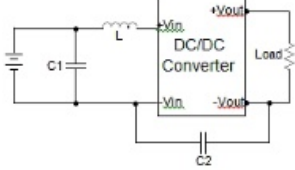

EMI FILTER

Input Filter Components (C1,C2,L) are used to help meet conducted emissions requirement for the module. These Components should be mounted as close as possible to the module, and all leads should be minimized to decrease radiated noise.

	C1	L	C2
RR2-05XXS/D06AX	220uF/100V	12uH	
RR2-12XXS/D06AX	220uF/100V	12uH	
RR2-24XXS/D06AX	220uF/100V	12uH	MLCC470pF
RR2-48XXS/D06AX	220uF/100V	12uH	MLCC470pF

Suffix "3" means 3.5KVdc isolation
Suffix "M" means Metal Case instead of standard Plastic case


The models listed above is just for standard type. If you need the special specification product, please contact our service member by telephone presented in shortform cover or e-mail to :info@rsg-electronic.de

NOTE

1. Typical value at nominal input voltage and full load.
2. Test by nominal input voltage and constant resistor load.
3. Measured Input reflected ripple current with a simulated source inductance of 12uH.
4. Exceeding the absolute ratings of the unit could cause damage. It is not allowed for continuous operating.
5. Operation under no-load conditions will not damage these devices, however they may not meet all listed specifications.
6. It's necessary to add minimum capacitor in output for some models, please check single model datasheet for detail value.
7. Input filter components are be required to help meet conducted emission class A, which application refer to the EMI Filter of design & feature configuration.
8. An external filter capacitor is required if the module has to meet IEC61000-4-4 and IEC61000-4-5. The filter capacitor RSG suggest: Nippon - chemi - con KY series, 220uF/100V.

RR2-S06/D06

MECHANICAL SPECIFICATIONS

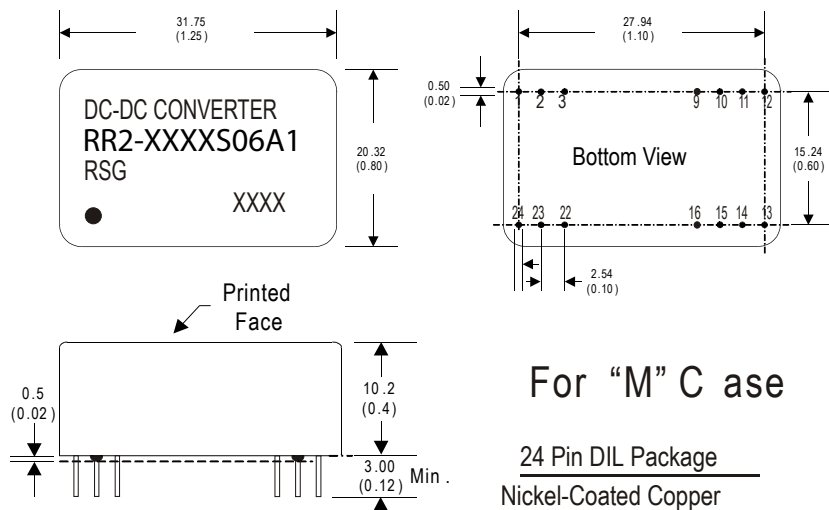

For "M" C ase

24 Pin DIL Package
Nickel-Coated Copper

- Notes: All dimensions are typical in millimeters (inches).
1. Pin diameter: 0.5 ±0.05 (0.02 ±0.002)
 2. Pin pitch and length tolerance: ±0.35 (±0.014)
 3. Case Tolerance: ±0.5 (±0.02)
 4. Stand-off tolerance: ±0.1 (±0.004)

PIN CONNECTIONS				
PIN NUMBER	SINGLE	DUAL	SINGLE-H	DUAL-H
1	+V Input	+V Input	N.P.	N.P.
2	N.C.	-V Output	-V Input	-V Input
3	N.C.	Common	-V Input	-V Input
9	N.P.	N.P.	N.P.	Common
10	-V Output	Common	N.P.	N.P.
11	+V Output	+V Output	N.C.	-V Output
12	-V Input	-V Input	N.P.	N.P.
13	-V Input	-V Input	N.P.	N.P.
14	+V Output	+V Output	+V Output	+V Output
15	-V Output	Common	N.P.	N.P.
16	N.P.	N.P.	-V Output	Common
22	N.C.	Common	+V Input	+V Input
23	N.C.	-V Output	+V Input	+V Input
24	+V Input	+V Input	N.P.	N.P.

The models listed here are just standard type. If you need a product with special specification or you have questions regarding packing standards (Tube oder Tape/Reel) as well as application support, please contact our specialists: sales@rsg-electronic.de or +49 69-984047-41/-28

STAND Juni 2016 Rev 01