

W005 THRU W10

Features

- High Current Capability
- Ideal for printed circuit boards
- High Temperature Soldering: 260°C for 10 seconds
- Reliable low cost construction technique results in inexpensive products

Maximum Ratings


- Operating Temperature: -55°C to +150°C
- Storage Temperature: -55°C to +150°C
- For capacitive load. Derate current by 20%

MCC Part Number	Maximum Recurrent Peak Reverse Voltage	Maximum RMS Voltage	Maximum DC Blocking Voltage
W005	50V	35V	50V
W01	100V	70V	100V
W02	200V	140V	200V
W04	400V	280V	400V
W06	600V	420V	600V
W08	800V	560V	800V
W10	1000V	700V	1000V

Electrical Characteristics @ 25°C Unless Otherwise Specified

Average Forward Current	$I_{F(AV)}$	1.5 A	$T_C = 50^\circ\text{C}$
Peak Forward Surge Current	I_{FSM}	50A	8.3ms, half sine
Maximum Instantaneous Forward Voltage	V_F	1.10V	$I_{FM} = 1.0A;$ $T_C = 25^\circ\text{C}$
Maximum DC Reverse Current At Rated DC Blocking Voltage	I_R	10μA 500uA	$T_C = 25^\circ\text{C}$ $T_C = 125^\circ\text{C}$

1.5Amp Glass Passivated Bridge Rectifier 50 to 1000 Volts

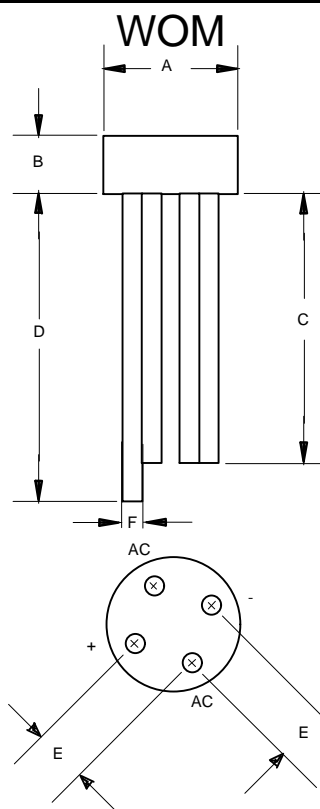

DIM	DIMENSIONS				NOTE
	INCHES		MM		
	MIN	MAX	MIN	MAX	
A	----	.358	-----	9.10	
B	----	.225	-----	5.70	
C	1.000	---	25.40	---	
D	1.200	---	30.50	---	
E	.180	.220	4.60	5.60	
F	.030	.032	0.76	0.81	

W005G thru W10G

