

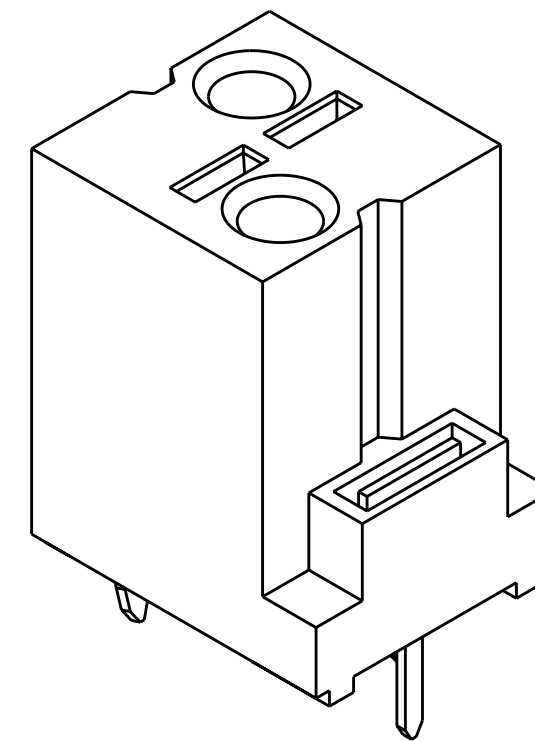
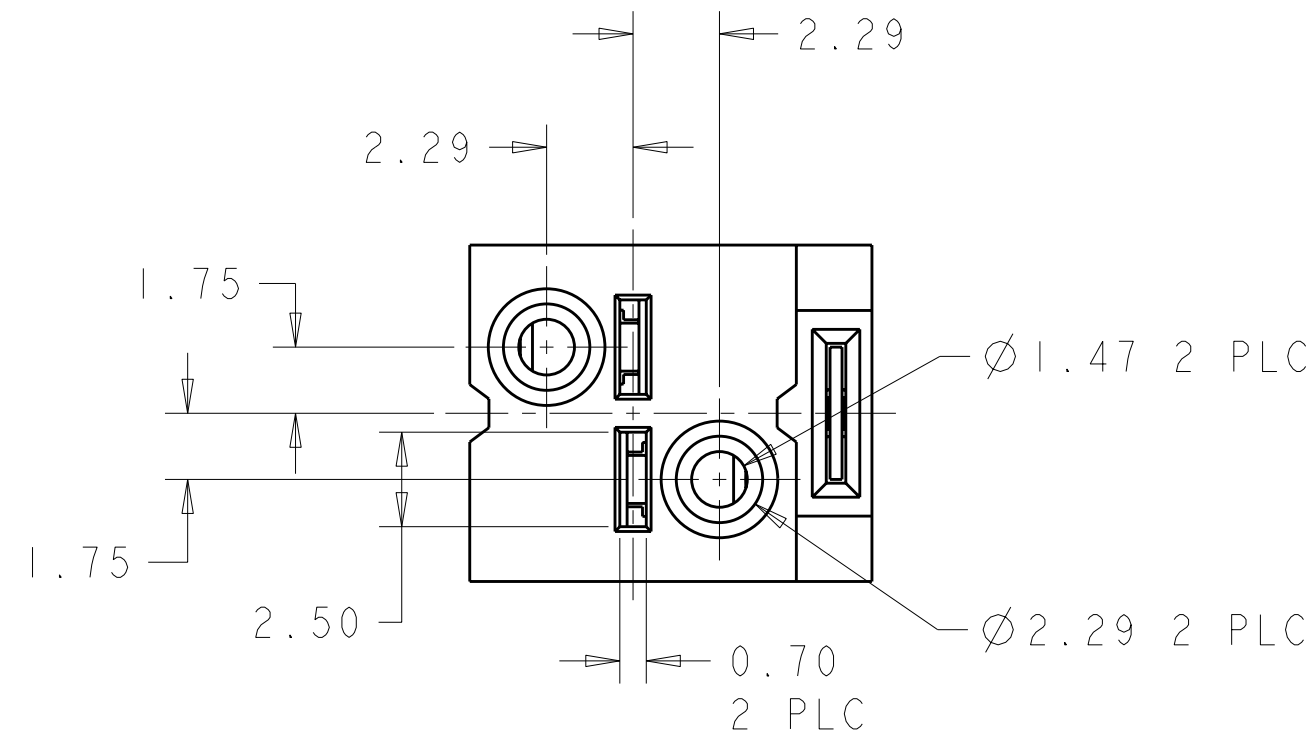
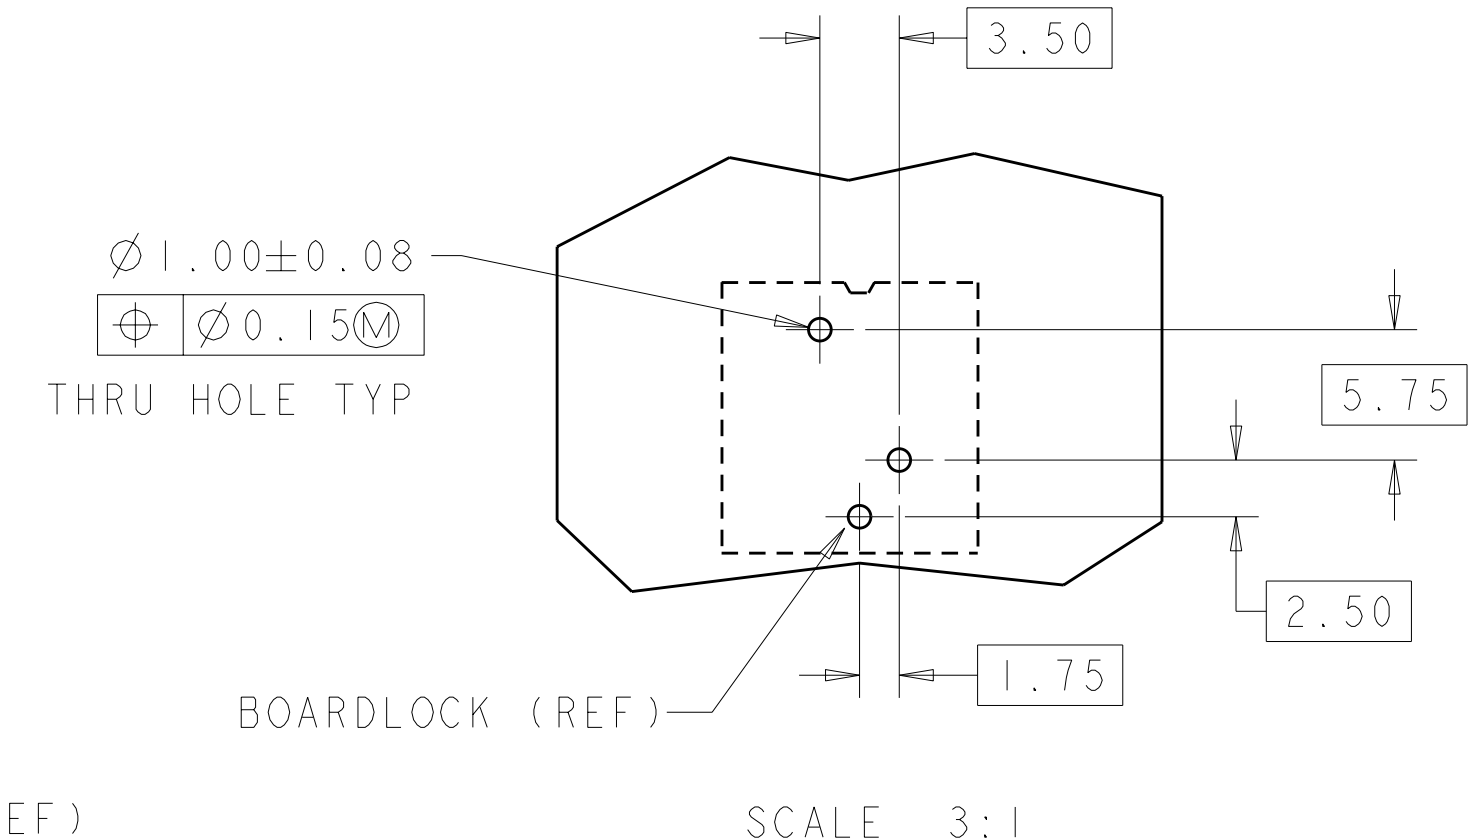


LOC	DIST	REVISIONS					
FT	0	P	LTR	DESCRIPTION	DATE	DWN	APVD
			A4	REVISED PER ECR-10-013378	01JUL2010	HMR	DD
			A5	REVISED PER ECR-12-008903	16MAY2012	RS	DD

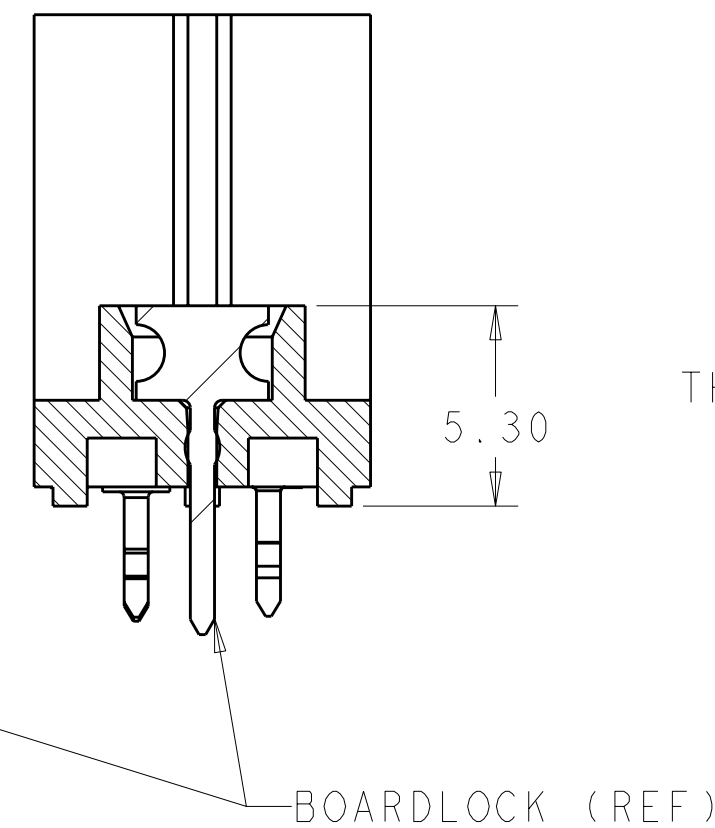


SCALE 5:1

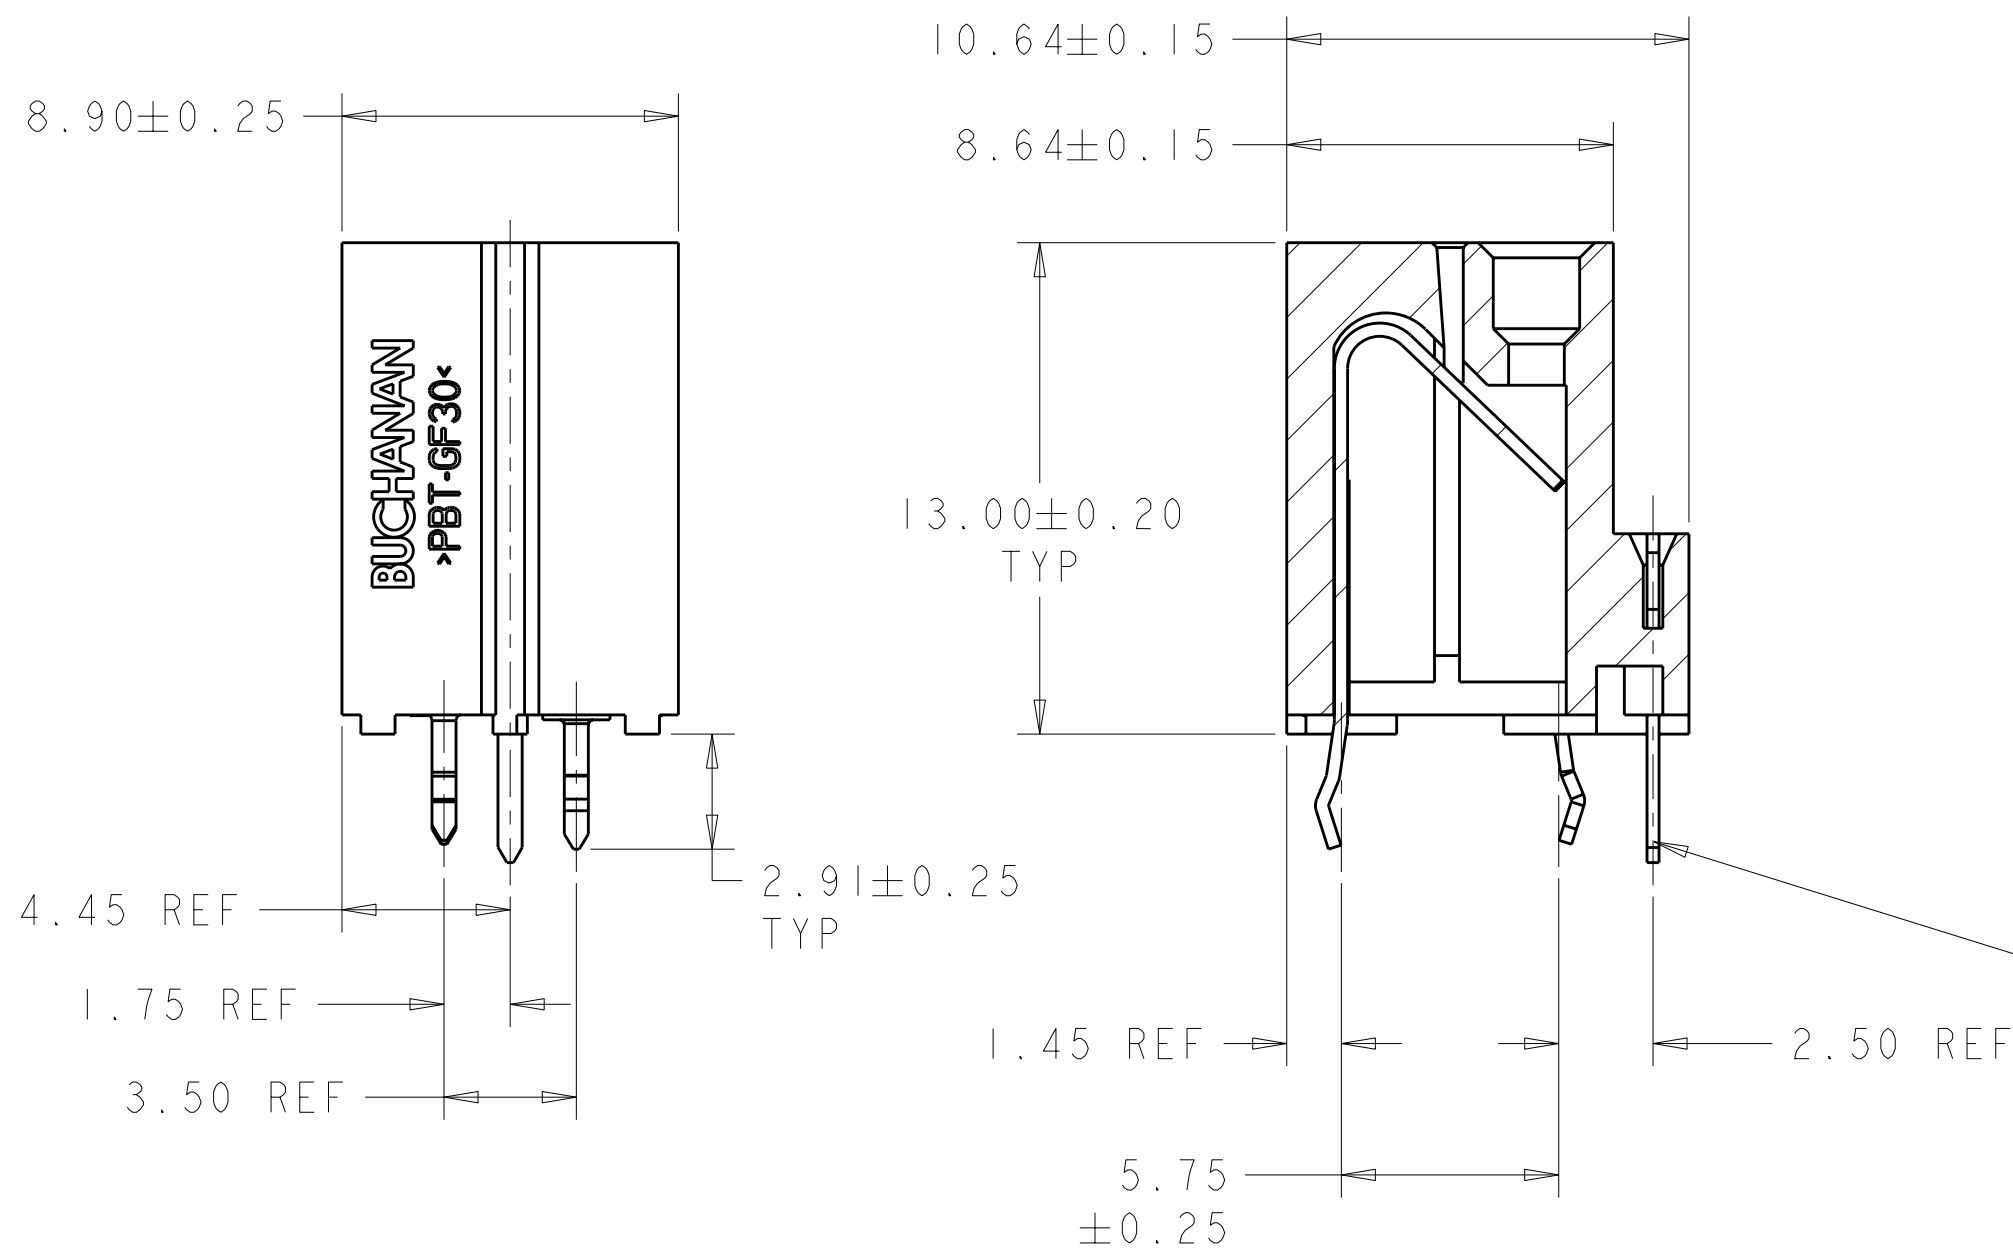

SCALE 3:1
PCB LAYOUT
VIEWED FROM CONNECTOR MOUNTING SIDE

- ① MATERIAL:
HOUSING: PTB, UL94-VO, COLOR BLACK.
CONTACTS: PHOSPHOR BRONZE.
BOARDLOCK: PHOSPHOR BRONZE.
- ② PLATING:
CONTACTS & BOARDLOCKS: PRE TIN, 2.5 μ m MIN OVER 0.76 μ m MIN NICKEL
(CONTACT AND BOARDLOCK EDGES WILL BE UNPLATED)
3. WIRE SIZE: 16 TO 18AWG SOLID AND 18AWG
BONDED PER ASTM B470, TYPE 1.
2.19mm MAX INSULATION DIAMETER.
STRIP LENGTH = 9.53 $\pm$ 1.00.

TAPE AND REEL	1811957-3
TUBE	1811957-2
TRAY	1811957-1
PACKAGING	PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN W.G.LENKER 21APR2005 CHK J.LANDIS 21APR2005 APVD C.RICHARD 13SEP2005		 TE Connectivity	
DIMENSIONS: mm 		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ±. 1 PLC ±0.5 2 PLC ±0.13 3 PLC ±. 4 PLC ±. ANGLES ±. FINISH		NAME ASSEMBLY, WIRE CONNECTOR, 2 POSITION WITH BOARDLOCK, SCREWLESS, VERTICAL	
MATERIAL 		WEIGHT -		SIZE A2	
		CUSTOMER DRAWING		CAGE CODE 00779	
				DRAWING NO C-1811957	
				RESTRICTED TO -	
				SCALE 5:1	
				SHEET 1 OF 1	
				REV A5	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1811957-1](#)