
THESE DRAWINGS ARE THE PROPERTY OF QUALTEK ELECTRONICS AND NOT TO BE REPRODUCED FOR OR COMMUNICATED TO A THIRD PARTY WITHOUT THE EXPRESS WRITTEN PERMISSION OF AN OFFICER OF QUALTEK ELECTRONICS.


REVISION			
REV.	DESCRIPTION	DATE	APPROVED

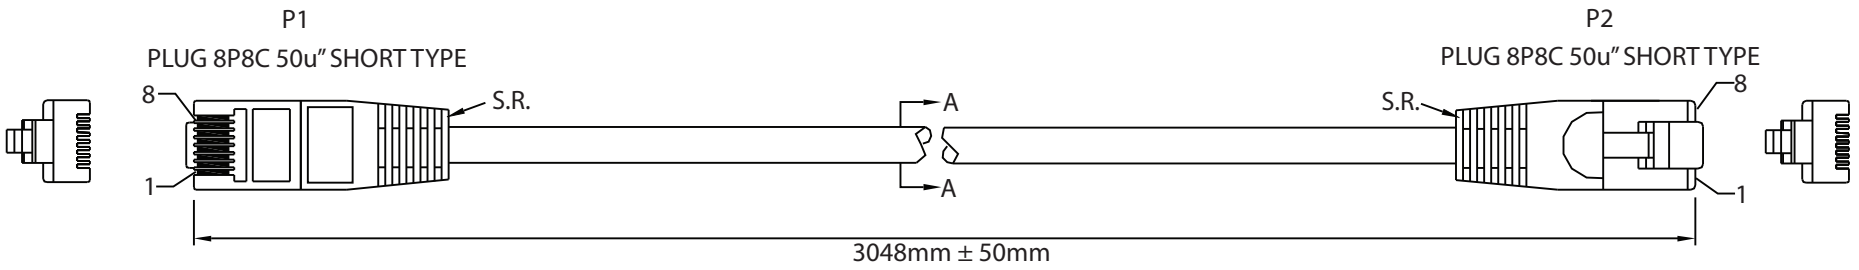


WIRING:568B

P1	COLOR	P2
1	white/orange	1
2	orange	2
3	white/green	3
6	green	6
4	blue	4
5	white/blue	5
7	white/brown	7
8	brown	8

NOTE: TWISTED PAIR

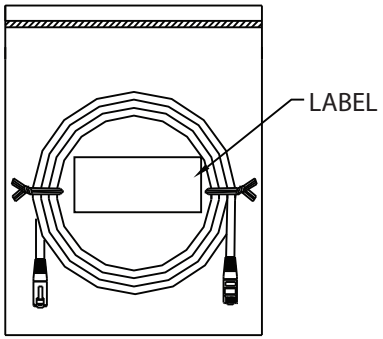

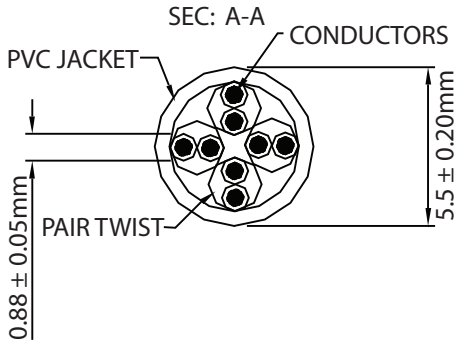

CONTROLLED

NOTES:
1. CABLE: CAT. 5E UTP
   26AWG COPPER STRANDED WIRE. 4 TWISTED PAIRS, 30V, 60°C
   OUTER JACKET: COLOR: YELLOW, O.D.: 5.5 ± 0.2mm
   JACKET MATERIAL: PVC
2. PLUG TYPE: MODULAR U.S. SHORT TYPE 8P8C GOLD PLATING 50u"
   MATERIAL: PC UL 94V-2
   S.R.: PVC 75P MOLD, COLOR: YELLOW
3. PACKING: 1PC/POLYBAG
4. RoHS COMPLIANT

Dim range (mm)	Tolerance +/- (mm)
0-1	0.15
1-6	0.20
6-18	0.30
18-50	0.50
50-120	0.70
120-250	0.90
250-500	1.20

Qualtek Electronics Corp.
WCI DIVISION

Part Number: 1225014-10 RoHS Compliant

Description: CAT. 5e UTP 8P8C - 8P8C

UNIT: mm

Drawn / Date	Checked / Date	Approved / Date
R.Nuti 09-16-10	09-16-10	LY / 09-16-10