

A2P2128

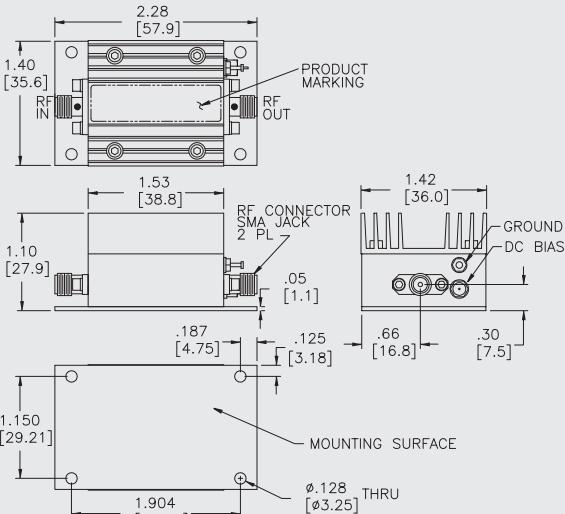
50 TO 2000 MHz SMA CASCADED AMPLIFIER

Typical Values

High Gain	27.0 dB
Low Noise Figure	3.2 dB
High Output Level	0.5 Watt
High Third Order I.P.	+39 dBm
High Reverse Isolation	49 dB
High Performance Thin Film	
Power Pack SMA Package	

A2P2128

27.0 dB
3.2 dB
0.5 Watt
+39 dBm
49 dB

A2P2128
**Power Pack SMA Case
(two-stage)**


SPECIFICATIONS*

Parameter	Typical	Guaranteed	
		0 to 50 °C	-55 to +85 °C
Frequency (Min.)	30-2100 MHz	50-2000 MHz	50-2000 MHz
Small Signal Gain (Min.)	27.0 dB	25.0 dB	23.5 dB
Gain Flatness (Max.)	±0.5 dB	±0.7 dB	±1.0 dB
Noise Figure (Max.)	3.2 dB	3.7 dB	4.2 dB
SWR (Max.)	Input/Output	1.7:1	1.9:1
Power Output (Min.) @ 1dB comp.		+27.5 dBm	+26.3 dBm
Reverse Isolation		49 dB	—
DC Current (Max.)		340 mA	355 mA
			365 mA

* Measured in a 50-ohm system at +15 Vdc unless otherwise specified.

INTERMODULATION PERFORMANCE

Typical @ 25 °C
A2P2128

Second Order Harmonic Intercept Point	+58 dBm
Second Order Two Tone Intercept Point	+52 dBm
Third Order Two Tone Intercept Point	+39 dBm

ABSOLUTE MAXIMUM RATINGS

Storage Temperature	-62 to +125 °C
Maximum Case Temperature	+115 °C
Maximum DC Voltage	+16 Volts
Maximum Continuous RF Input Power	+15 dBm
Maximum Short Term Input Power (1 Minute Max.)	50 Milliwatts
Maximum Peak Power (3 µsec Max.)	0.5 Watt
Burn-in Temperature	+85 °C
Thermal Resistance ¹ (θjc)	+14 °C/Watt
Junction Temperature Rise Above Case (Tjc)	+60.0 °C

¹ Thermal resistance is based on total power dissipation.

DIMENSIONS ARE IN INCHES [MILLIMETERS]