


SAW Bandpass Filter 263001B



1. Features

- IF bandpass filter
- High attenuation
- Single-ended operation
- DIP Package
- Maximum Storage Temperature Range : -40℃ ~ 85℃
- Electrostatics Sensitive Device (ESD)

2. Package Dimension

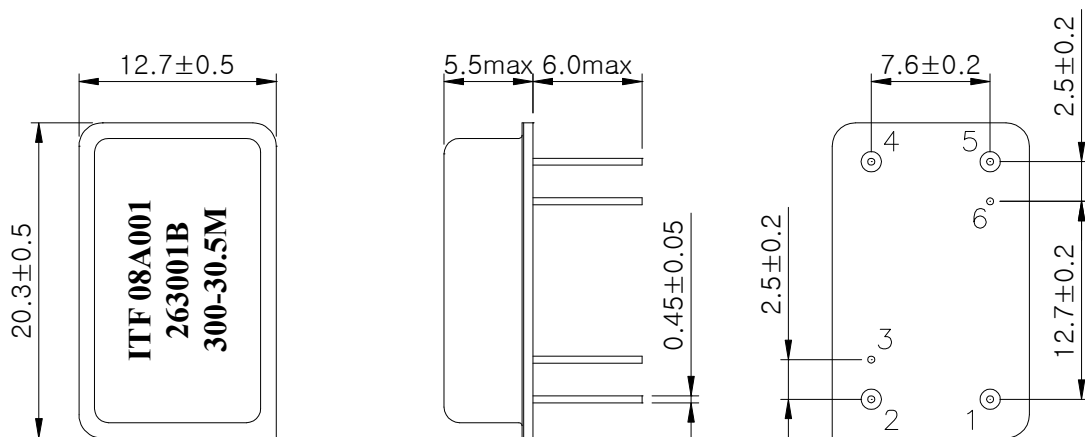

Package : D2012

Dimensions shown are nominal in millimeters

Base : Fe(SPCC), Au plating over Ni plated

Cap : Cu & Cr Alloy, Ni Plated

Termination : Kovar, Au Plated

Pin Configuration	
1	Input
5	Output
2, 4	Ground
3, 6	Case ground

 Integrated Technology Future	ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	263001B	
		Rev. Date	2008-12-24	
		Rev.	NM8016-CS01	1/5

SAW Bandpass Filter 263001B



3. Specifications

Fo = 300.0 MHz

Terminating source impedance : 50Ω and matching network

Terminating load impedance : 50Ω and matching network

Operating Temperature Range : +25℃		Minimum	Typical	Maximum
Center Frequency	MHz	-	300.0	-
Insertion Loss	dB	-	31.3	33.0
1dB Bandwidth	MHz	30.4	30.5	-
3dB Bandwidth	MHz	-	30.85	-
40dB Bandwidth	MHz	-	32.4	32.5
Amplitude Ripple (fo±15.0 MHz)	dB	-	0.55	1.0
Group Delay Variation (fo±15.0 MHz)	nsec	-	25	50
Absolute Delay	usec	-	2.47	-
Ultimate Rejection	dB	45	50	-
Out of Band-gain				
Fo +/- 16.0MHz	dB	15	23	
Fo +/- 18.5MHz	dB	40	50	
Temperature Coefficient of Frequency	ppm/℃	-	-18	-

Notes :

- 1) All specifications are based on the matching schematic shown below
- 2) All specifications are measured by Agilent Network analyzer and full 2 port calibration at room temperature
- 3) All attenuation measurements are measured relative to insertion loss


	ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	263001B	
		Rev. Date	2008-12-24	
		Rev.	NM8016-CS01	2/5

SAW Bandpass Filter 263001B



4. Matching Schematic

(Actual matching values may vary due to PCB layout and parasitics)

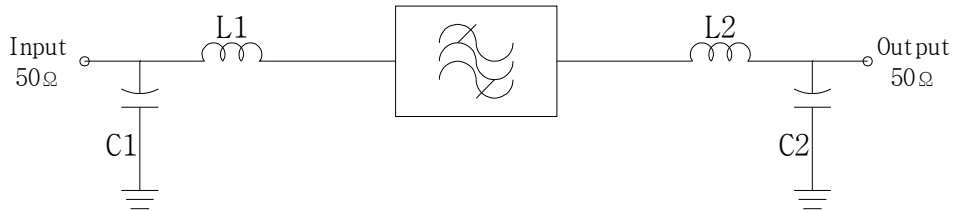

$$L1 = L2 = 12\text{nH}$$

$$C1 = C2 = 24\text{pF}$$

5. Marking Configuration

ITF¹⁾ 08A001²⁾

263001B³⁾

300⁴⁾ -30.5M⁵⁾

1) Manufacturer name

2) Lot Number

3) Part Number

4) Center Frequency



5) 1dB-Bandwidth

 Integrated Technology Future	ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	263001B	
		Rev. Date	2008-12-24	
		Rev.	NM8016-CS01	3/5

SAW Bandpass Filter 263001B







6. Typical Performance (at +25°C)

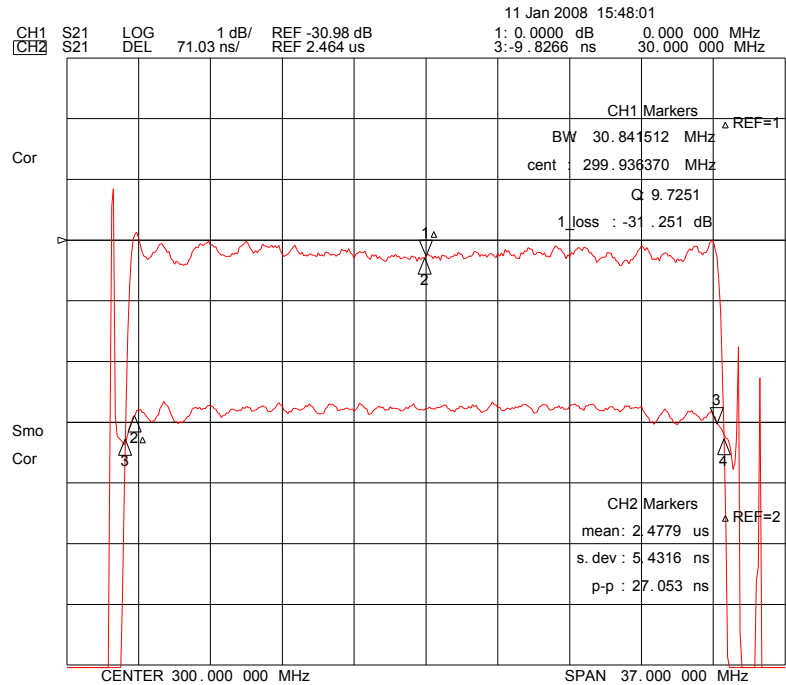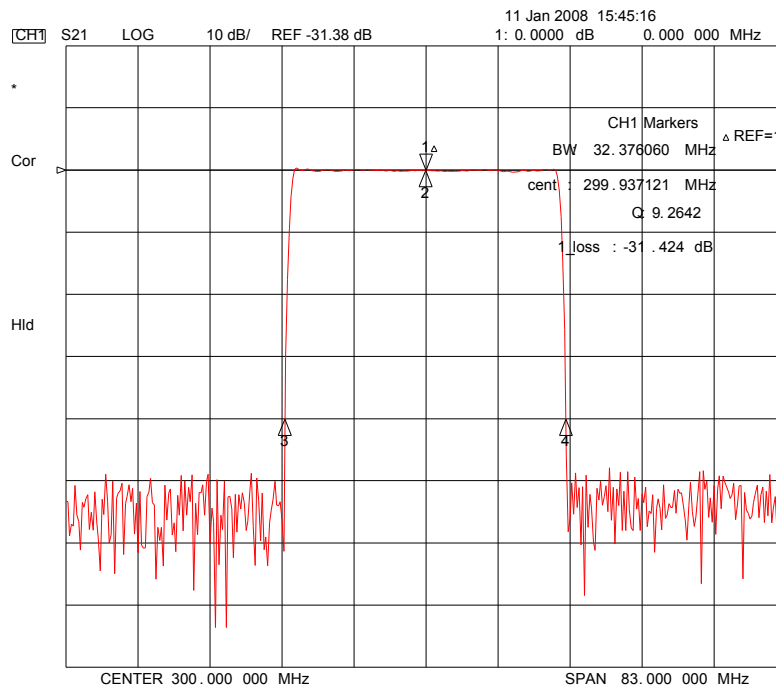

	ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809		Part No. 263001B	
			Rev. Date 2008-12-24	
			Rev. NM8016-CS01	4/5

SAW Bandpass Filter 263001B

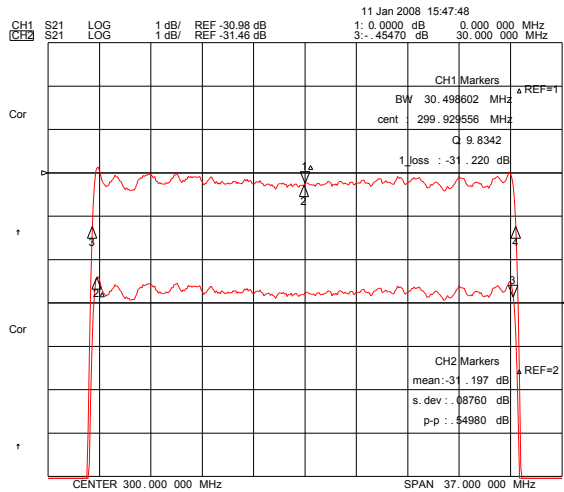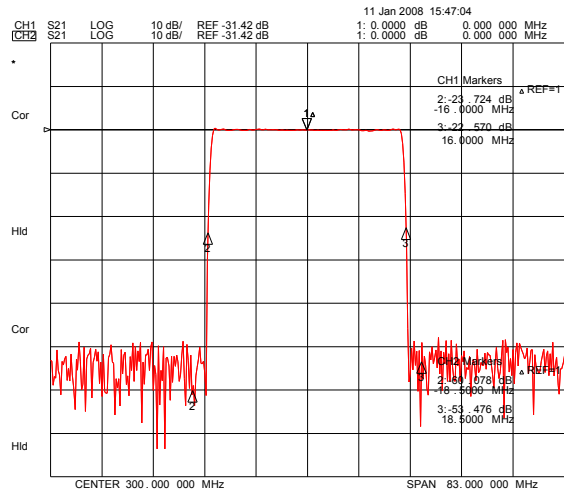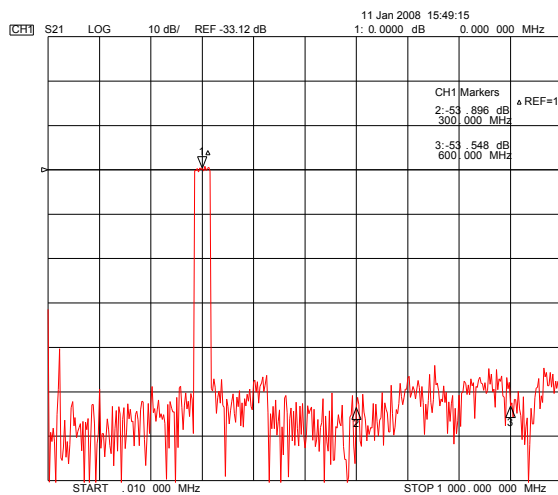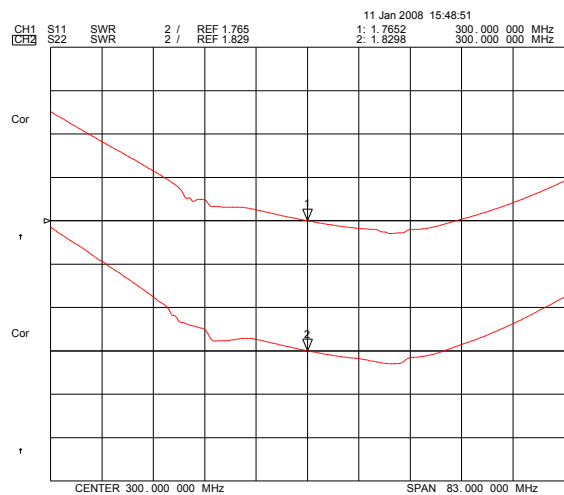

ITF Co., Ltd.
102-901, Bucheon Technopark 364,
Samjeong-Dong, Ojeong-Gu, Bucheon-City,
Gyeonggi-Do, Korea 421-809

Part No.

263001B

Rev. Date

2008-12-24

Rev.

NM8016-CS01

5/5