


GOT712-837

12.1" XGA EN50155 Railway Fanless Touch Panel PC with Intel® Atom™ Processor E3845 1.91 GHz (-25°C ~ +70°C)

NEW

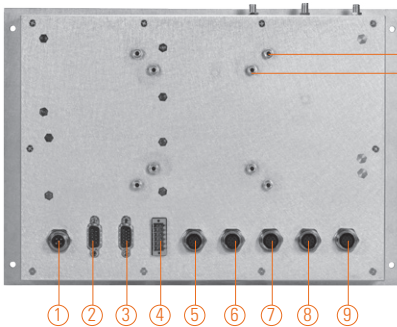


VESA 100
VESA 75

1. DC for power input with isolated 1.5KV
2. CAN Bus with isolated 1.5KV
3. Audio (Line out, Line in, speaker out)
4. DIO (6 input/2 output with isolated 1.5KV)
5. USB 2.0 x 2
6. COM 2 (RS-232/422/485 with isolated 1.5KV)
7. COM 1 (RS-232/422/485 with isolated 1.5KV)
8. LAN 2 (Gigabit LAN with isolated 1.5KV)
9. LAN 1 (Gigabit LAN with isolated 1.5KV)



▲ Side view

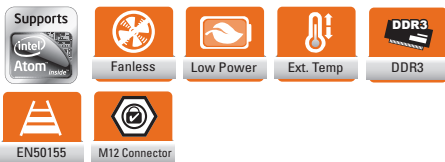

Introduction

The EN50155 railway touch panel PC, GOT712-837, is equipped with a 12.1-inch XGA TFT LCD display with high brightness LED backlight (800 nits), which can allow a train operator to easily read any operational status messages, even under direct sunlight. Design for ease of use and maintenance, this all-in-one 12.1" railway touch panel PC also has an alternative keypad control on the front panel for easy access and cleaning purposes. This feature-rich panel PC has an IP65 rating on the front bezel, M12 connectors and is EN50155 certified.

Wide Temperature Range Support (-25°C to +70°C)

The Intel® Atom™-based railway PC, GOT712-837, applies unique extended temperature technology with wide temperature range support as well as fanless operation. It also has a high brightness display and co

Designed for Railway Application

The Axiomtek GOT712-837 is particularly suitable for demanding HMI applications in the railway sector, including tasks like monitoring and controlling train functions such as speed, temperature, and security, or for fleet management. To ensure the panel PC's use in a variety of different locations, the 12.1-inch railway panel PC supports various mounting selections for panel mount, wall mount, VESA arm and desktop stand. Moreover, it is also ready for Windows® 8.1 or 7.

Features

- Sunlight readable 12.1" XGA high brightness (1000 nits)
- Fanless with Intel® Atom™ processor E3845 1.91 GHz
- Alternative keypad control in front bezel
- All lockable connectors design
- Auto-dimming for detecting the different environment
- Wide operating temperature: -25°C ~ +70°C
- EN50155 certificated for railway application

Specifications

Front Bezel	IP65, NEMA 4 rugged protection, aluminum front bezel	
LCD Panel	Display Type	12.1" XGA TFT LCD
	Brightness (cd/m ²)	800 nits
	Resolution	1024 x 768
	Viewing Angle (H/V)	160°/160°
Main System	CPU	Intel® Atom™ processor E3845 1.91 GHz (Bay Trail)
	Chipset	SoC Integrated
	System Memory	DDR3 4 GB (default) or 8 GB memory onboard
	BIOS	AMI with Axiomtek standard features; such as, SmartView, Ethernet Boot ROM (RPL & PXE), customer CMOS backup
	Storage	16 GB flash onboard 1 x mSATA
Watchdog Timer	255 levels, 1 ~ 255 sec.	
Onboard Graphics	Integrated in Intel® GFX	



Specifications


I/O Connector	2 x RS-232/422/485 with isolated 1.5KV (M12, A-coded) 2 x RJ-45 for Gigabit LAN with isolated 1.5KV (M12, X-coded) 2 x USB 2.0 (M12, A-coded) 1 x DC for power input with isolated 1.5KV (M12, A-coded) 1 x Audio: Line out, Line in, speaker out (D-sub) 1 x DIO (6 input/2 output) with isolated 1.5KV (phoenix type) 1 x CAN bus with isolated 1.5KV (D-sub)
Expansion Interface	2 x PCIe Mini Card slot
Flat Panel	Alternative 5-wire resistive touch panel or keyboard
Power Supply	16.8V to 30V DC or 77V to 137.5V DC 10ms hold up time (S2)
Dimensions	330 mm (13") (W) x 64.4 mm (2.53") (D) x 245 mm (9.65") (H)
Packing Dimensions	TBD
Weight (net/gross)	TBD
Environment	Operating temperature: -25°C ~ +70°C (-13°F ~ +158°F) Storage Temperature: -30°C ~ +80°C (-22°F ~ +176°F) Relative humidity: 10% ~ 95% @ 40°C, non-condensing
Certificate	EN50155 Railway, EN50121-3-2 Railway EMC, EN61373 Railway Shock/Vibration, EN45545 Compliance with keypad UIC612-01

* W.T.: Wide Temperature. All W.T. supported products have to be sorted by Axiomtek.

Optional Accessories

822B7100060E	GOT712 3G+GPS Kit
822B7100050E	GOT712 Wi-Fi Kit
594B8122820E	M12 A-coded USB cable
594B7102100E	RS-232 Cable
594B7102700E	M12 X-coded USB cable

Dimensions

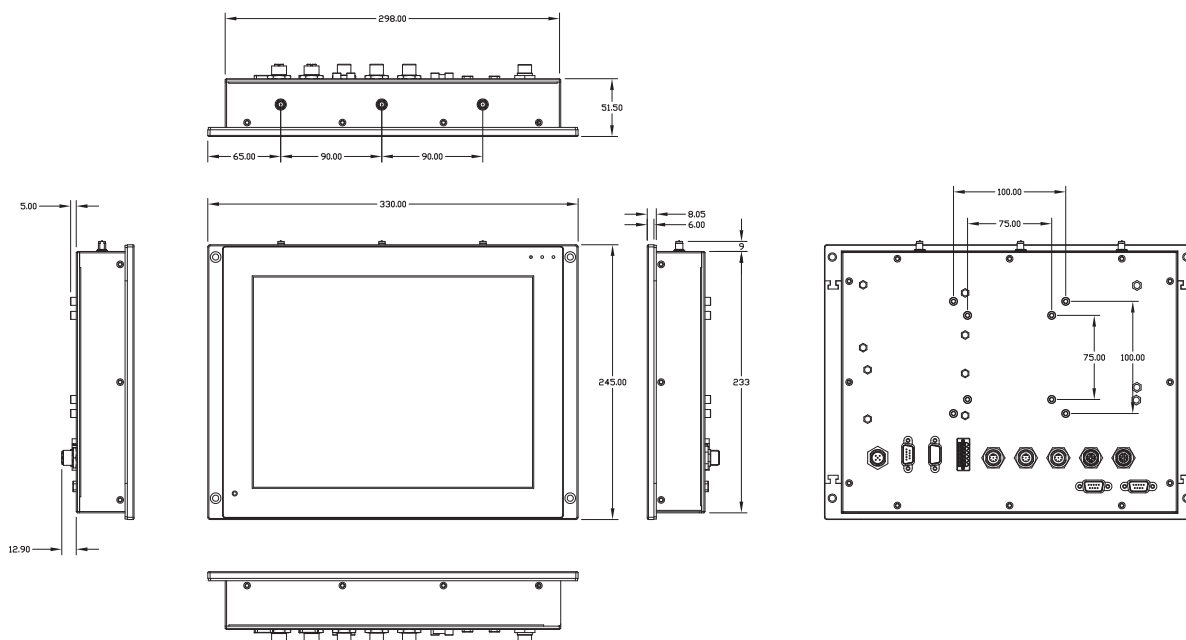

Ordering Information

24VDC Power Input (14.4V to 40VDC)	
GOT712-837-R-E3845-24VDC	12" XGA fanless EN50155 railway touch panel computer with Intel® Atom™ E3845, sunlight readable CD (1000 nits), 5-wire resistive touch screen and 24VDC power input
110VDC Power Input (66V to 154VDC)	
GOT712-837-R-E3845-110VDC	12" XGA fanless EN50155 railway touch panel computer with Intel® Atom™ E3845, sunlight readable LCD (1000 nits), 5-wire resistive touch screen and 110VDC power input

* Specification and certifications are based on options and may vary.

Optional EOS Installation

WES 7
WE8S

Optional OS Installation

Windows® 7
Windows® 8/8.1



▲ Touch without keypad version

Overview

Fanless Touch Panel Computers

2
Heavy-duty Fanless Touch Panel Computers

Industrial Touch Panel Computers

Industrial Touch panel Monitors

Infotainment Touch Panel Computers

Healthcare & Medical Solutions

Open Frame Panel Computers

Accessories

