

2N4858
2N4858A

N-CHANNEL
SILICON JFET



TO-18 CASE



www.centrasemi.com

DESCRIPTION:

The CENTRAL SEMICONDUCTOR 2N4858 and 2N4858A are N-Channel silicon JFETs designed for analog switching and chopper applications.

MARKING: FULL PART NUMBER

MAXIMUM RATINGS: ($T_A=25^\circ\text{C}$)

Drain-Source Voltage	
Drain-Gate Voltage	
Reverse Gate-Source Voltage	
Forward Gate Current	
Power Dissipation ($T_A=25^\circ\text{C}$)	
Operating and Storage Junction Temperature	

SYMBOL

V_{DS}	40
V_{DG}	40
V_{GSR}	40
I_{GF}	50
P_D	360
T_J, T_{stg}	-65 to +200

UNITS

V
V
V
mA
mW
$^\circ\text{C}$

ELECTRICAL CHARACTERISTICS: ($T_A=25^\circ\text{C}$ unless otherwise noted)

SYMBOL	TEST CONDITIONS	MIN	MAX	UNITS
I_{GSS}	$V_{GS}=20\text{V}, V_{DS}=0$		0.25	nA
I_{GSS}	$V_{GS}=20\text{V}, V_{DS}=0, T_A=150^\circ\text{C}$		0.5	μA
I_{DSS}	$V_{DS}=15\text{V}, V_{GS}=0$	8.0	80	mA
$I_{D(OFF)}$	$V_{DS}=15\text{V}, V_{GS}=10\text{V}$		0.25	nA
$I_{D(OFF)}$	$V_{DS}=15\text{V}, V_{GS}=10\text{V}, T_A=150^\circ\text{C}$		0.5	μA
BV_{GSS}	$I_G=1.0\mu\text{A}, V_{DS}=0$	40		V
$V_{GS(OFF)}$	$V_{DS}=15\text{V}, I_D=0.5\text{nA}$	0.8	4.0	V
$V_{DS(ON)}$	$I_D=5.0\text{mA}, V_{GS}=0$		0.5	V
$r_{DS(ON)}$	$V_{GS}=0, I_D=0, f=1.0\text{kHz}$		60	Ω
C_{rss}	$V_{GS}=10\text{V}, V_{DS}=0, f=1.0\text{MHz}$ (2N4858)		8.0	pF
C_{rss}	$V_{GS}=10\text{V}, V_{DS}=0, f=1.0\text{MHz}$ (2N4858A)		3.5	pF
C_{iss}	$V_{GS}=10\text{V}, V_{DS}=0, f=1.0\text{MHz}$ (2N4858)		18	pF
C_{iss}	$V_{GS}=10\text{V}, V_{DS}=0, f=1.0\text{MHz}$ (2N4858A)		10	pF
t_d	$V_{DD}=10\text{V}, V_{GS(OFF)}=4.0\text{V}, I_D=5.0\text{mA}$ (2N4858)		10	ns
t_d	$V_{DD}=10\text{V}, V_{GS(OFF)}=4.0\text{V}, I_D=5.0\text{mA}$ (2N4858A)		8.0	ns
t_r	$V_{DD}=10\text{V}, V_{GS(OFF)}=4.0\text{V}, I_D=5.0\text{mA}$ (2N4858)		10	ns
t_r	$V_{DD}=10\text{V}, V_{GS(OFF)}=4.0\text{V}, I_D=5.0\text{mA}$ (2N4858A)		8.0	ns
t_{off}	$V_{DD}=10\text{V}, V_{GS(OFF)}=4.0\text{V}, I_D=5.0\text{mA}$ (2N4858)		100	ns
t_{off}	$V_{DD}=10\text{V}, V_{GS(OFF)}=4.0\text{V}, I_D=5.0\text{mA}$ (2N4858A)		80	ns


R0 (19-August 2010)

2N4858
2N4858A

N-CHANNEL
SILICON JFET



TO-18 CASE - MECHANICAL OUTLINE

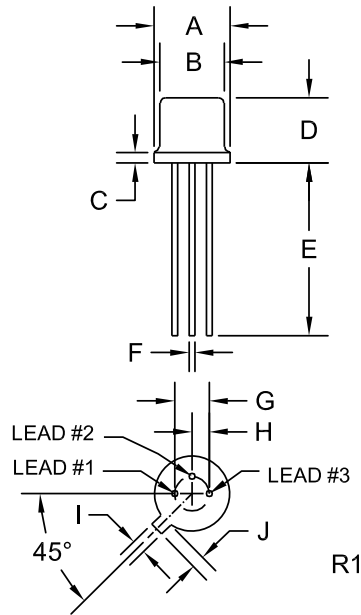

LEAD CODE:

- 1) Source
- 2) Drain
- 3) Gate

MARKING: FULL PART NUMBER

SYMBOL	DIMENSIONS			
	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A (DIA)	0.209	0.230	5.31	5.84
B (DIA)	0.178	0.195	4.52	4.95
C	-	0.030	-	0.76
D	0.170	0.210	4.32	5.33
E	0.500	-	12.70	-
F (DIA)	0.016	0.019	0.41	0.48
G (DIA)	0.100		2.54	
H	0.050		1.27	
I	0.036	0.046	0.91	1.17
J	0.028	0.048	0.71	1.22

TO-18 (REV: R1)

R0 (19-August 2010)