

NOTES: UNLESS OTHERWISE SPECIFIED
 1. INTERFACE COMPLIANT TO SMPTE 304 SPECIFICATION


2. MATERIAL SPECIFICATIONS:
 CONTACTS: COPPER ALLOY
 CRIMP SLEEVE: PHOS. BRONZE
 O-RING: SILICONE RUBBER
 SHIELD GROUND: 303 STAINLESS STEEL PER ASTM A582.

3. FINISH SPECIFICATIONS:
 CONTACTS: .000100 MIN GOLD PER ASTM B488 OVER
 .000080 MIN NICKEL PER AMS-QQ-N-290
 CRIMP SLEEVE: .000100 MIN NICKEL PER AMS-QQ-N-290 OVER
 COPPER FLASH PER ASTM B734.

4. REPLACEMENT KIT FOR ASSEMBLIES: 7765-3-3 (NOT PRE-POLISHED) AND 7765-4-3 (PRE-POLISHED)

5. USE CABLE ASSEMBLY PROCEDURE: CAP-E05.

| REV | DESCRIPTION | BY DATE | APPD |
|-----|-----------------------------|--------------|------|
| 03 | PRELIMINARY DRAWING ER22701 | JCF 04/28/10 | XX |

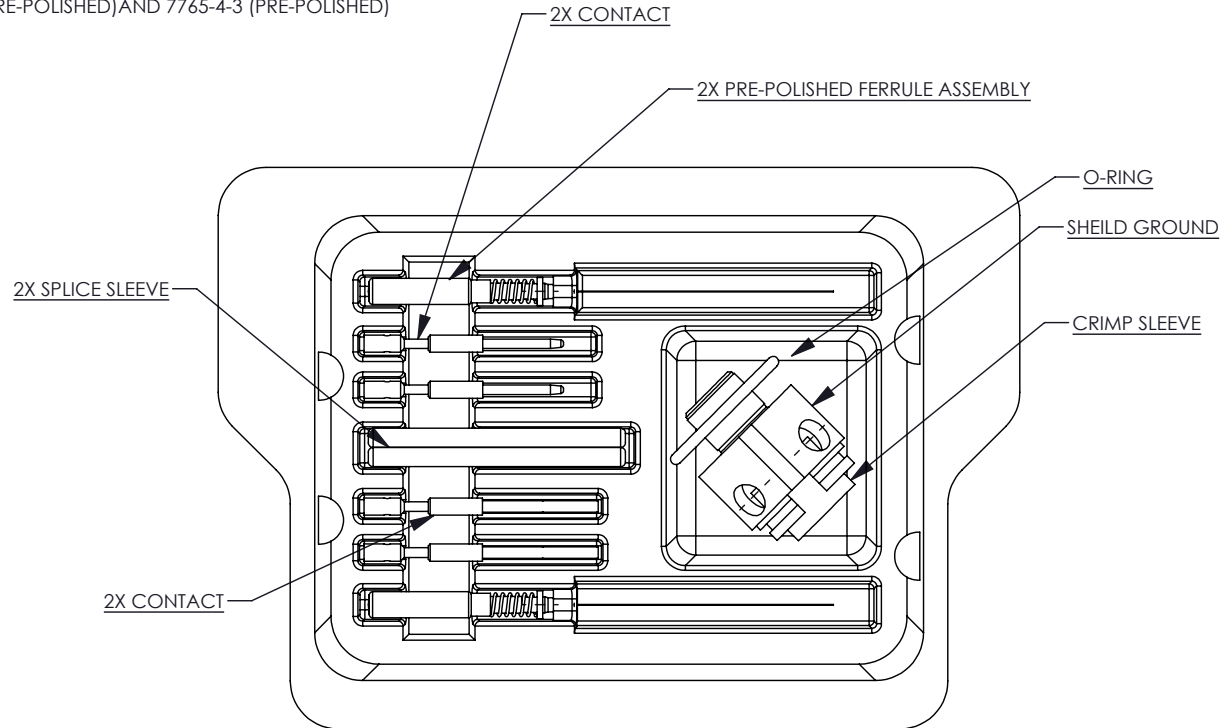

CATALOG P/N: 7760-000-00708Z

| | | | | | |
|--|----------|----------|-------------|--|----|
| PER ASME Y14.5M-1994 UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES [MM] TOLERANCES: DECIMAL: .XX [X.X] ± .01 [0.3] .XXX [X.XX] ± .005 [0.13] .XXXX [X.XXX] ± .XXXX ANGLES: ± 2° SCALE: 1:1 | | | | by WINCHESTER ELECTRONICS Winchester Electronics Corporation 62 Barnes Industrial Road North Wallingford, Connecticut 06492 | |
| CUSTOMER SALES DRAWING | | | THIRD ANGLE | | |
| DRAWN | DATE | APPROVED | DATE | | |
| PSM | 04/21/10 | JCF | 04/23/10 | | |
| APPROVED | DATE | APPROVED | DATE | | |
| IP | 04/23/10 | PP | 04/23/10 | | |
| A SD7760-000-00708Z | | | | SHT | OF |
| | | | | 1 | 1 |
| | | | | REV | 03 |