

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0366430008](#)
Status: **Active**
Overview: [MLX Power Connectors](#)
Description: 2.13mm Diameter MLX Plug Housing, 15 Circuit, PA Polyamide Nylon 6/6 94V-2, Glow Wire Capable

Documents:

3D Model	Product Specification PS-36644-001-001 (PDF)
Drawing (PDF)	Packaging Specification PK-42021-XX-001 (PDF)
Product Specification PS-36644-001 (PDF)	RoHS Certificate of Compliance (PDF)

Agency Certification

CSA	LR19980
UL	E29179


General

Product Family	Crimp Housings
Series	36643
Application	Power, Wire-to-Wire
Comments	This Molex product is manufactured from material that has the following ratings, tested by independent agencies :. a) A Glow Wire Ignition Temperature (GWIT) of at least 775 deg C per IEC 60695-2-13.. b) A Glow Wire Flammability Index (GWFI) above 850 deg C per IEC 60695-2-12.and hence complies with the requirements set out in the International Standard IEC 60335-1 5th edition - household and similar electrical appliances - safety; section 30 Resistance to heat and fire.<P><P>The customers using this product must determine its suitability for use in their particular application through testing or other acceptable means as described in end-product glow-wire flammability test standard IEC 60695-2-11 and any applicable product end-use standard(s).<P>If it is determined during the customer's evaluation of suitability, that higher performance is required, please contact Molex for possible product options.

Overview	MLX Power Connectors
Product Name	MLX
UPC	800756935133

Physical

Circuits (maximum)	15
Color - Resin	Natural
Flammability	94V-2
Gender	Plug
Glow-Wire Capable	Yes
Keying to Mating Part	None
Lock to Mating Part	Yes
Material - Resin	Nylon
Number of Rows	5
Packaging Type	Bag
Panel Mount	No
Pitch - Mating Interface	6.35mm
Pitch - Termination Interface	6.35mm
Polarized to Mating Part	Yes
Stackable	No

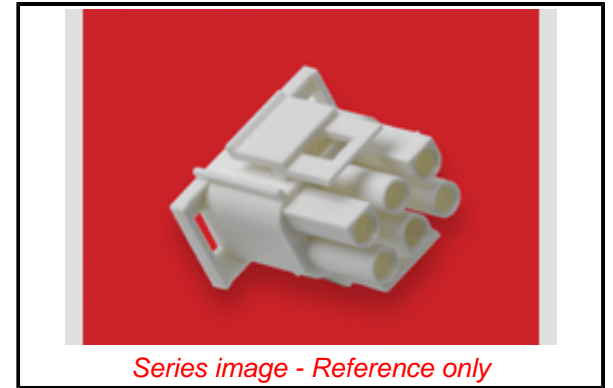

EU ELV

Not Reviewed

EU RoHS

Not Reviewed

REACH SVHC

Not Reviewed

Halogen-Free

Status

Not Reviewed

Need more information on product environmental compliance?

Email productcompliance@molex.com
Please visit the [Contact Us](#) section for any non-product compliance questions.

China ROHS	Not Reviewed
ELV	Not Reviewed
RoHS Phthalates	Not Reviewed

Search Parts in this Series

[36643](#) Series

Mates With

2.13mm Diameter MLX Pin and Socket Receptacle [42022](#) , [36644](#)

Use With

MLX Crimp Terminal [42023](#) , [42024](#)

Temperature Range - Operating -55°C to +105°C

Electrical

Current - Maximum per Contact 20.0A

Material Info

Reference - Drawing Numbers

Packaging Specification PK-42021-XX-001

Product Specification PS-36644-001, PS-36644-001-001

Sales Drawing SD-36643-009

This document was generated on 07/12/2018

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION