

DF15005 THRU DF1510

List

List.....	1
Package outline.....	2
Features.....	2
Mechanical data.....	2
Maximum ratings	2
Rating and characteristic curves.....	3
Pinning information.....	4
Marking.....	4
Tube packing.....	4
Suggested thermal profiles for soldering processes.....	5
High reliability test capabilities.....	6

DF15005 THRU DF1510

1.5A Glass Passivated Single-Phase Bridge Rectifiers-50-1000V


Features

- Surge overload ratings to 50 amperes peak.
- Recommended for non-automatic applications.
- Ideal for & save space on printed circuit board.
- Applicable for automatic insertion.
- Reliable low cost construction utilizing molded plastic technology results in inexpensive product.
- Glass passivated chip junctions.
- Lead-free parts meet RoHS requirements.
- UL recognized file # E321971
- Suffix "-H" indicates Halogen free parts, ex. DF15005-H

Mechanical data

- Epoxy:UL94-V0 rated flame retardant
- Case : Molded plastic, DF
- Terminals : Solder plated, solderable per MIL-STD-750, Method 2026
- Polarity : marked on body
- Mounting Position : Any
- Weight : Approximated 0.38 gram

Package outline

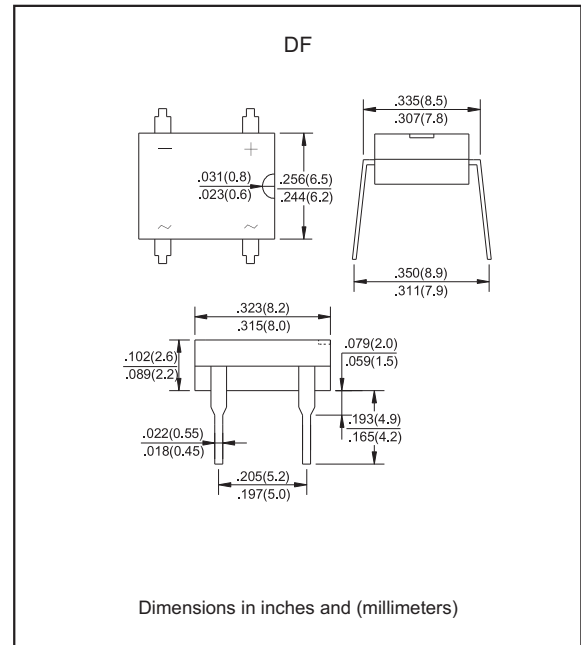

Maximum ratings and Electrical Characteristics (AT T_A=25°C unless otherwise noted)

PARAMETER	CONDITIONS	Symbol	MIN.	TYP.	MAX.	UNIT
Forward rectified current	See Fig.1	I _O			1.5	A
Forward surge current	8.3ms single half sine-wave superimposed on rate load (JEDEC methode)	I _{FSM}			50	A
Reverse current	V _R = V _{RRM} T _J = 25°C	I _R			10	uA
	V _R = V _{RRM} T _J = 125°C				500	
I ² t Rating for Fusing	t<8.3ms	I ² t			10.4	A ² s
Typical Junction Capacitance Per Element	Measured at 1.0MHz and applied reverse voltage of 4.0V DC	C _J		25		pF
Typical thermal resistance	Junction to ambient mounted on P.C.B with 0.5*0.5"(13*13mm) copper pads.	R _{θJA}		40		°C/W
Storage temperature		T _{STG}	-65		+175	°C

SYMBOLS	V _{RRM} ^{*1} (V)	V _{RMS} ^{*2} (V)	V _R ^{*3} (V)	V _F ^{*4} (V)	Operating temperature T _J , (°C)
DF15005	50	35	50	1.10	-55 to +150
DF1501	100	70	100		
DF1502	200	140	200		
DF1504	400	280	400		
DF1506	600	420	600		
DF1508	800	560	800		
DF1510	1000	700	1000		

*1 Repetitive peak reverse voltage

*2 RMS voltage

*3 Continuous reverse voltage

*4 Maximum forward voltage@I_F=1.5A

Rating and characteristic curves (DF15005 THRU DF1510)

FIG.1-FORWARD CURRENT DERATING CURVE

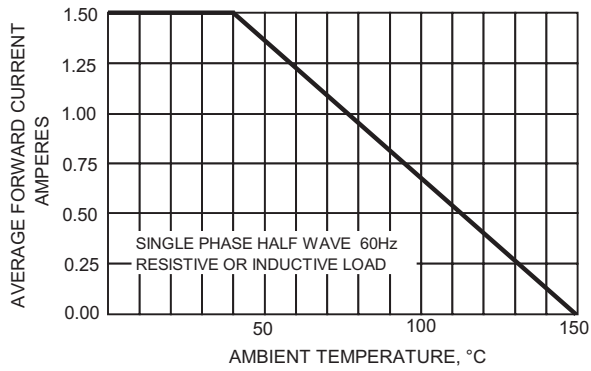


FIG.2-MXIMUM NON-REPETITIVE SURGE CURRENT

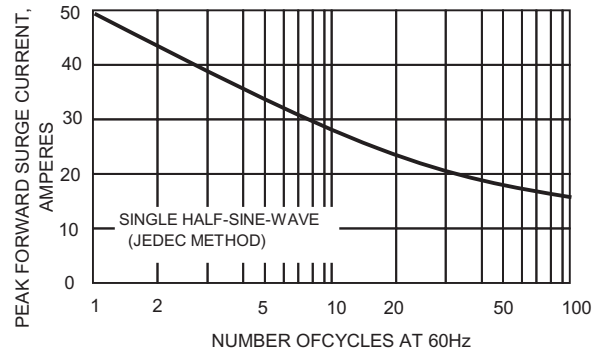


FIG.3-TYPICAL JUNCTION CAPACITANCE

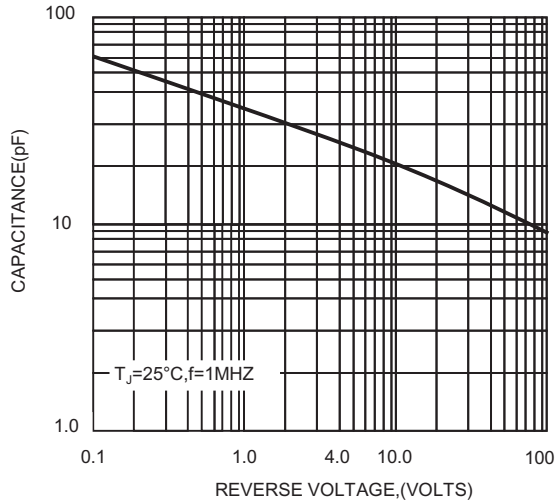


FIG.4-TYPICAL FORWARD CHARACTERISTICS




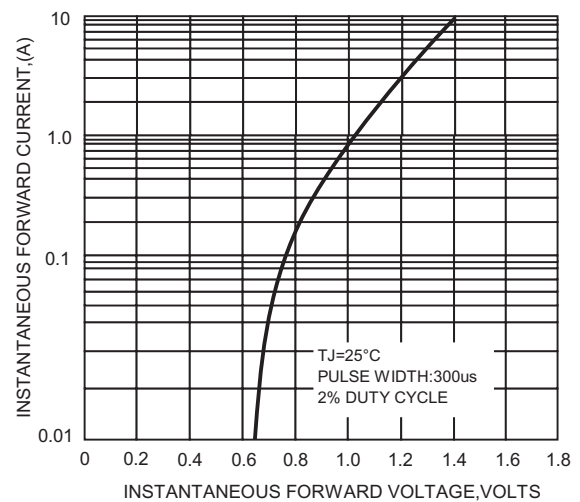


FIG.5-TYPICAL REVERSE CHARACTERISTICS

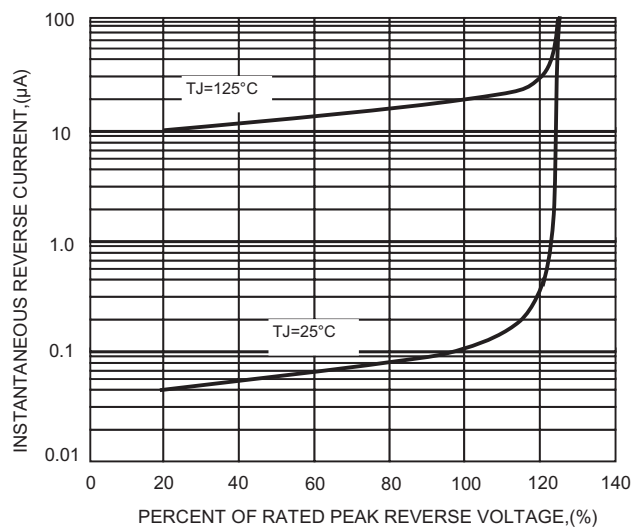

DF15005 THRU DF1510

Pinning information

Simplified outline	Symbol
	

Marking

Type number	Marking code
DF15005	DF15005
DF1501	DF1501
DF1502	DF1502
DF1504	DF1504
DF1506	DF1506
DF1508	DF1508
DF1510	DF1510


Tube packing

PACKAGE	TUBE (pcs)	TUBE SIZE (m/m)	CARTON SIZE (m/m)	CARTON (pcs)	APPROX. GROSS WEIGHT (kg)
DF	50	420*12.0*9.9	452*164*130	5,000	3.0

DF15005 THRU DF1510

Suggested thermal profiles for soldering processes

1. Lead free temperature profile wave-soldering

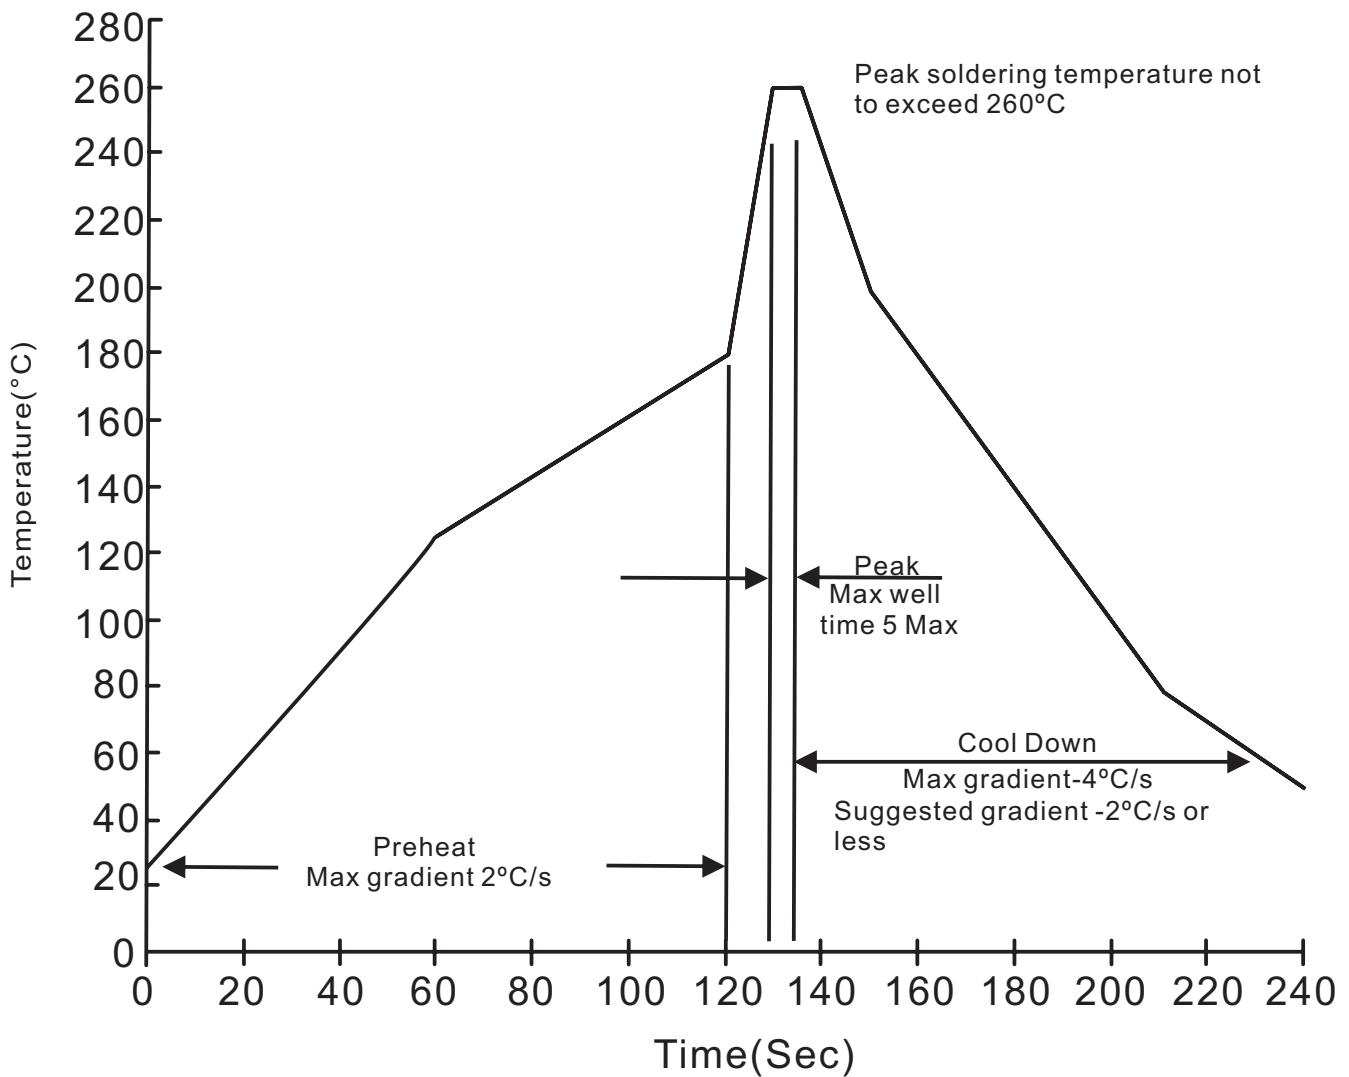

DF15005 THRU DF1510

High reliability test capabilities

Item Test	Conditions	Reference
1. Solder Resistance	at $260\pm 5^{\circ}\text{C}$ for $10\pm 2\text{sec}$. immerse body into solder $1/16''\pm 1/32''$	MIL-STD-750D METHOD-2031
2. Solderability	at $245\pm 5^{\circ}\text{C}$ for 5 sec.	MIL-STD-202F METHOD-208
3. High Temperature Reverse Bias	$V_R=80\%$ rate at $T_J=150^{\circ}\text{C}$ for 168 hrs.	MIL-STD-750D METHOD-1038
4. Forward Operation Life	Rated average rectifier current at $T_A=25^{\circ}\text{C}$ for 500hrs.	MIL-STD-750D METHOD-1027
5. Intermittent Operation Life	$T_A = 25^{\circ}\text{C}$, $I_F = I_O$ On state: power on for 5 min. off state: power off for 5 min. on and off for 500 cycles.	MIL-STD-750D METHOD-1036
6. Pressure Cooker	$15P_{SIG}$ at $T_A=121^{\circ}\text{C}$ for 4 hrs.	JESD22-A102
7. Temperature Cycling	-55°C to $+125^{\circ}\text{C}$ dwelled for 30 min. and transferred for 5min. total 10 cycles.	MIL-STD-750D METHOD-1051
8. Thermal Shock	0°C for 5 min. rise to 100°C for 5 min. total 10 cycles.	MIL-STD-750D METHOD-1056
9. Forward Surge	8.3ms single half sine-wave superimposed on rated load, one surge.	MIL-STD-750D METHOD-4066-2
10. Humidity	at $T_A=85^{\circ}\text{C}$, RH=85% for 1000hrs.	MIL-STD-750D METHOD-1021
11. High Temperature Storage Life	at 175°C for 1000 hrs.	MIL-STD-750D METHOD-1031