
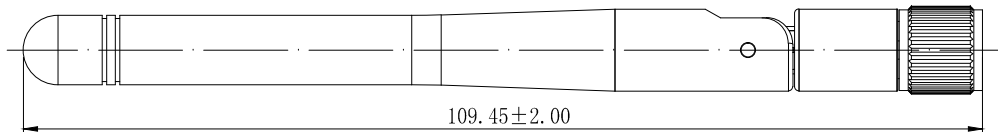
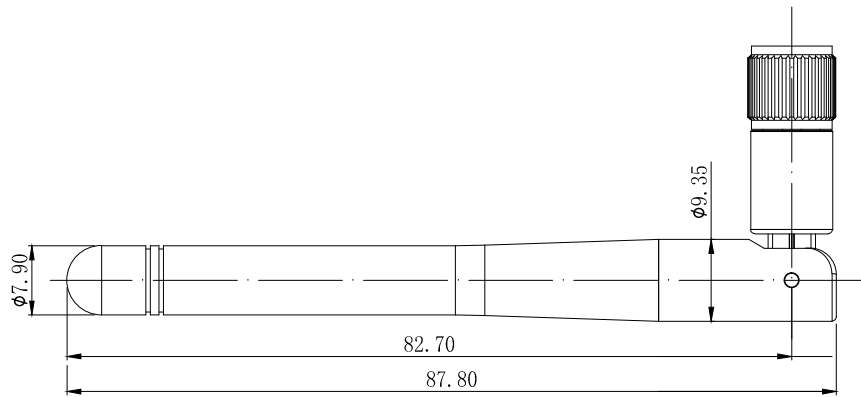


REVISION	DESCRIPTION	DATE	DRAFTER
A0	FIRST RELEASE	18. 03. 27	FUYONG. LIU
A1	统一料号	18. 10. 18	Mark

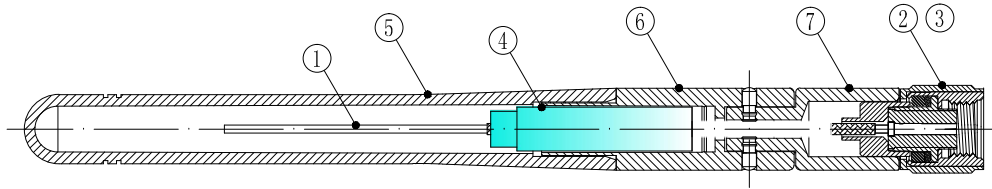

技术要求:

- 电气特性: 使用矢量网络分析仪100%测试。  
特性阻抗:50Ω; 适用频率范围:2.4GHz-2.5GHz; 驻波比:最大2.00。
- 尺寸检验: [\*]为FAI检测项目; \*为重点检测项目; ■为CPK管制项目。
- 外观检验: 目视全检。产品表面不得有刮伤、破损和脏污;  
镀层色泽光亮均匀, 不得有氧化。
- 环保要求: 产品及其使用之物料皆需要符合RoHS要求。

No.	PART NUMBER	PART NAME & DESCRIPTION	Q'TY	REMARKS
7	2SBKD34N2	下固定座小孔, 09.35*L19.7*05.10, PC黑色	1	---
6	2SBKU32N3	上固定座, 09.35*L28.8, PC 黑色连铆钉式	1	---
5	2SBKG0200	套杆, L67.5*09.35, TPEE 黑色	1	---
4	2YG030	2.4G铜管, 锌合金	1	---
3	2LC15PF801-5	SMA 母针镀金OD1.5*L7.8mm, 镀金3u''	1	---
2	2LC15PM808-8	SMA公头OD10.0*L16.5*OD5.1mm, 黑色POM	1	---
1	2C5R17811BN1	微细同轴电缆, RG178, 银锡线, 棕色	1	---

GENERAL TOLERANCE: LINEAR: X ±0.20 X.X ±0.15 X.XX ±0.05 X.XXX ±0.01 ANGLE: X° ±4.00° X.X° ±3.00° X.XX° ±2.00° X.XXX° ±1.00°		HJ-Tech 东莞市皇捷通讯科技有限公司	
FILE NAME: 产品图	TITLE: 射频天线组件	直连式外置天线, CD379黑色, 铜管结构, RG178线+SMA公头母针	
ENG/DATE: FUYONG. LIU/18. 03. 27	P/N: HJ-2.4G-RG178-SMA		
CHE/DATE:	UNIT: mm	SCALE: 1:1	REVISION: A0
APP/DATE:	SHEET: 1/1		

COMPLIANCE WITH THE REQUIREMENT: ■RoHS; □ HF; □ SONY SS-00259; □ OTHERS  
\*NO USING ESTRICTED AND BANNED SUBSTANCE