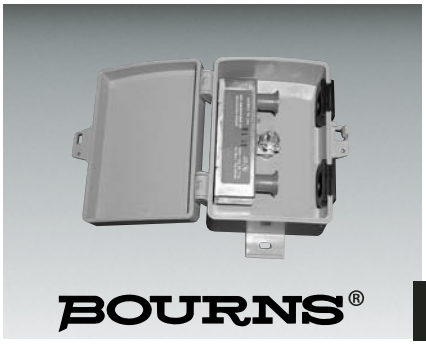


Features

- Coax TV & Communication Station Protector in a compact enclosure
- c UL us Listed per UL 1863

7041 Series – Station Enclosure

The Model 7041 Series combines the Bourns 1740 Series of Coax broadband protectors and station protectors (optional) into a compact residential protector enclosure. Refer to the respective data sheets for additional information on the elements that make up this system.

How To Order

7041 - 1X - X X

Model Number Designator

Comm Protector
0 = None
1 = Yes (not available in U.S.A.)

Comm Protector Type
B = 125EW (2374-01) Dual Gas Tube (UL, cUL, Telcordia)
C = 125EW-R (2375-01) Dual Gas Tube (UL, cUL, RUS)
E [1] = 155HS-MSP (2378-35-HS) Voice/DSL/Data (UL, cUL)
Y [1] = 155HS-BC* (2378-35-BC) Balance-Sensitive DSL (UL, cUL)

*For DSL systems requiring capacitive balance within 1 pF.
Note 1 = Digi.Guard II - 125 size, RUS Heavy Duty.

Coax Protector Type


	Part Number	Protector Sparkover Voltage	Description
2 =	1740-15	*150V*	Standard CATV
3 =	1740-23	*230V*	CATV/Tel with ring voltage
4 =	1740-35	*350V*	CATV/Tel with ring voltage

All offered protectors are UL approved.

Product Dimensions

High	Wide	Deep
144.8 (5.7)	86.4 (3.4)	55.9 (2.2)

DIMENSIONS: MM (INCHES)

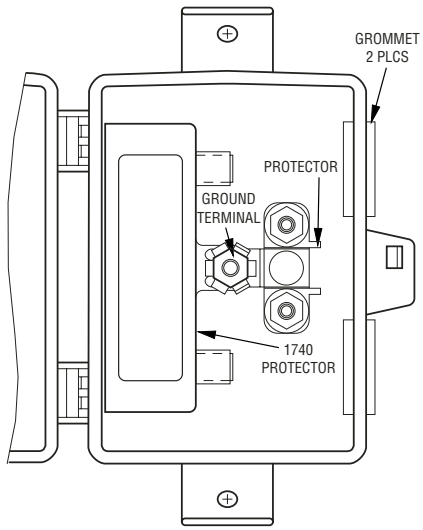

Reliable Electronic Solutions

Asia-Pacific:
TEL +886- (0)2 25624117
FAX +886- (0)2 25624116
Europe:
TEL +41-41 7685555
FAX +41-41 7685510
The Americas:
TEL +1-951 781-5500
FAX +1-951 781-5700
bourns.com

REV. F 05/07

Specifications are subject to change without notice.
Customers should verify actual device performance in their specific applications.