

IE-SW-VL16T-14TX-2SC

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Product image



- Wide ranges of variations with 5 to 16 ports
- Variations for Gigabit Ethernet
- Two redundant power inputs 12/24/48 V DC
- Models with copper and fibre-optic interface (multimode and singlemode)
- Extensive approvals: CE, FCC, cULus, Class I Div. 2 / ATEX Zone 2, DNV-GL

General ordering data

Version	Network switch, unmanaged, Fast Ethernet, Number of ports: 14x RJ45, 2x SC Multi-mode, IP30, -40 °C...75 °C
Order No.	1286610000
Type	IE-SW-VL16T-14TX-2SC
GTIN (EAN)	4050118076998
Qty.	1 pc(s).

Creation date November 4, 2021 1:25:05 AM CET

Catalogue status 22.10.2021 / We reserve the right to make technical changes.

IE-SW-VL16T-14TX-2SC

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

Dimensions and weights

Depth	105 mm	Depth (inches)	4.134 inch
Height	135 mm	Height (inches)	5.315 inch
Width	80.5 mm	Width (inches)	3.169 inch
Net weight	1,140 g		

Temperatures

Storage temperature	-40 °C...85 °C	Operating temperature	-40 °C...75 °C
Humidity	5 to 95 % (non-condensing)		

Environmental Product Compliance

REACH SVHC	Lead 7439-92-1
------------	----------------

EMC conformity and approvals

EMC standards	EN 55032, EN 55024, CISPR 32, FCC Part 15 Subpart B Class A, IEC 61000-4-2 ESD: Contact: 6 kV; Air: 8 kV, IEC 61000-4-3 RS: 80 MHz to 1 GHz: 20 V/m, IEC 61000-4-4 EFT: Power: 2 kV; Signal: 1 kV, IEC 61000-4-5 Surge: Power: 2 kV; Signal: 2 kV, IEC 61000-4-6 CS: 10 V, IEC 61000-4-8	Explosive risk zone	UL/cUL, Class I, Division 2, Groups A, B, C and D, ATEX Zone 2 Ex nA nC IIC T4 Gc
Free fall	According to IEC 60068-2-32	Safety standard	UL508, UL 60950-1, EN 60950-1
Ship use	DNV-GL	Shock	according to IEC 60068-2-27
Vibration	according to IEC 60068-2-6		

Environmental conditions

Humidity	5 to 95 % (non-condensing)	Operating temperature, max.	75 °C
Operating temperature, min.	-40 °C	Storage temperature, max.	85 °C
Storage temperature, min.	-40 °C		

Fibre optic transceiver characteristics

Transmission rate	100 Mbps		
Transceiver type	Multimode		
Connector type	SC-Duplex		
Transmission distance, typ.	5 km		
Wavelength	typ.		1,300 nm
	Wavelength		TX
	min.		1,260 nm
	max.		1,360 nm
	Wavelength		RX
	min.		1,100 nm
max.		1,600 nm	

Creation date November 4, 2021 1:25:05 AM CET

Catalogue status 22.10.2021 / We reserve the right to make technical changes.

2

IE-SW-VL16T-14TX-2SC**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

Receive power	min.	-32 dBm
	max.	-3 dBm
Transmission power	min.	-20 dBm
	max.	-10 dBm
Link-budget	12 dB	

Guarantee

Time interval 5 years

Interfaces

Fibre-optic ports	100BaseFX ports (SC connector), Multimode	Function DIP switch	Port surveillance, Broadcast storm protection enable/disable
LED indicator	PWR1, PWR2, FAULT, 10/100M (TP-Port), 100M (fibre-optic port).	Number of ports	14x RJ45, 2x SC Multimode
RJ45 ports	10/100BaseT(X), auto negotiation, Full-/half-duplex mode, Auto MDI/MDI-X port	Signalling contact	1 relay output with a current capacity of 1 A at 24 V DC

MTBF

MTBF	According to Standard	MIL-HDBK-217F, GB 25°C
	Operating time (hours), min.	257,000 h

Power supply

Connection type	1 removable 6-pin terminal block	
Current consumption	0.44 A at 24 V	
Overload current protection	1.6 A	
Reverse polarity protection	Available	
Voltage supply	12/24/48 V DC, 2 redundant inputs	
Voltage supply range	Voltage type	DC
	Voltage, min.	9.6 V
	Voltage, max.	60 V

Switch characteristics

Bandwidth backplane	3.2 Gbps	MAC table size	4 K
Packet buffer size	1.25 Mbit		

Technical data

Housing main material	metal	Protection degree	IP30
Speed	Fast Ethernet	Switch	unmanaged
Type of mounting	DIN rail, Panel (with optional mounting kit)		

IE-SW-VL16T-14TX-2SC

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany

www.weidmueller.com

Technical data

Technology


Data switching	Store and Forward	Flow control	IEEE 802.3x flow control, Back pressure flow control
Standard	IEEE 802.3 for 10BaseT, IEEE 802.3u for 100BaseT(X) and 100BaseFX, IEEE 802.3x for flow control		

Classifications

ETIM 6.0	EC000734	ETIM 7.0	EC000734
ETIM 8.0	EC000734	ECLASS 9.0	19-17-01-06
ECLASS 9.1	19-17-01-06	ECLASS 10.0	19-17-04-02
ECLASS 11.0	19-17-04-02		

Approvals

Approvals

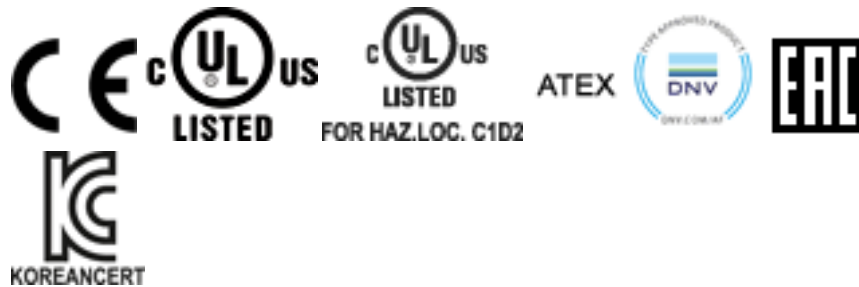

ROHS	Conform
UL File Number Search	E230683

Downloads

Approval/Certificate/Document of Conformity	DNV-GL certificate ATEX certificate KC certificate EU Declaration of Conformity
Engineering Data	STEP
User Documentation	Hardware Installation Guide
Catalogues	Catalogues in PDF-format
Brochures	