
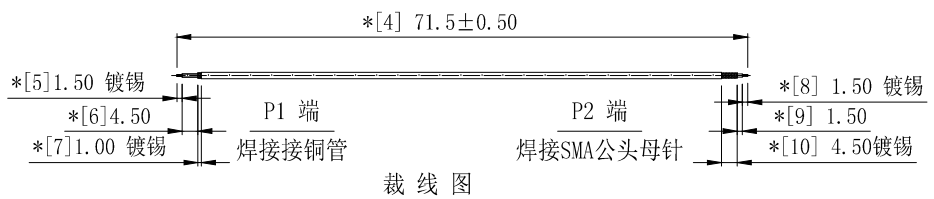
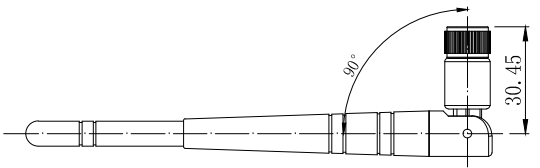
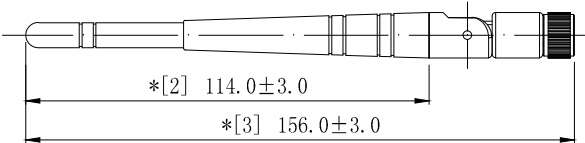


REVISION	DESCRIPTION	DATE	DRAFTER
A0	FIRST RELEASE	19. 11. 21	Mark
A1	子弹头生产VSWR偏高, 改成平头铜管	20. 07. 02	Mark

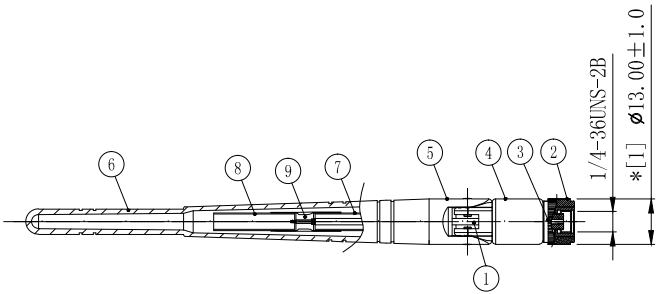

技术要求:

- 电气特性: 使用矢量网络分析仪100%测试。  
特性阻抗: 50Ω; 增益(Gain) 3dBi  
适用频率范围: 2.4GHz-2.5GHz VSWR: 2.0 MAX;  
5.15GHz-5.85GHz VSWR: 2.0 MAX;
- 尺寸检验: [\*]为FAI检测项目; \*为重点检测项目; ■为CPK管制项目。
- 外观检验: 目视全检。产品表面不得有刮伤、破损和脏污; 镀层色泽光亮均匀, 不得有氧化。
- 包装规范: 50PCS/包, 即1000PCS/箱。
- 环保要求: 产品及其使用之物料皆需要符合RoHS要求。

No.	PART NUMBER	PART NAME & DESCRIPTION	Q' TY	REMARKS
9	2TB050BK1-020	OD: 5.0*L20.0mm, 热缩套管黑色	1	---
8	2YG099	铜管: OD5.2*0.8*L22.00mm, 材质黄铜,	1	---
7	2YG098	铜管: OD5.2*1.55*L22.00mm, 材质黄铜	1	---
6	2SBKG0500	天线杆套, 13*L115, TPEE, 黑色	1	---
5	2SBKU31N8	CD384上固, OD: 13.00*L28.2mm, PC+PBT, 黑色	1	---
4	2SBKD36N3	CD13小孔下固, OD: 13.0*L25.3mm, PC+PBT, 黑色	1	---
3	2LC15PF801-5	SMA母针OD1.5*L7.8mm, C3604镀金	1	---
2	2LC15PF801-8	SMA公头OD13.0*L16.6*OD5.1mm, 镀镍	1	---
1	2C5R17811BN1	RG178透明棕银锡线-50 OHM	1	---

GENERAL TOLERANCE: LINEAR: X ±3.00 X.X ±1.00 X.XX ±0.50 X.XXX ±0.30 ANGLE: X° ±4.00° X.X° ±3.00° X.XX° ±2.00° X.XXX° ±1.00°		HJ-Tech 东莞市皇捷通讯科技有限公司 手机: 15015262131/13714786106	
FILE NAME: 产品图	TITLE: 射频天线组件	双频天线, CD387六环黑色, RG178线+SMA公头母针, OD: 13*L156mm	
ENG/DATE: Mark/19. 11. 21	CHE/DATE:	P/N: HJ-Wifi-RG178-SMA-L156mm	
APP/DATE:	UNIT: mm	SCALE: 1:1	REVISION: A0
		SHEET: 1/1	

COMPLIANCE WITH THE REQUIREMENT: ■RoHS;  
□ HF; □ SONY SS-00259; □ OTHERS  
\*NO USING ESTRICTED AND BANNED SUBSTANCE