


LXV Series

- Low impedance
- Endurance with ripple current : 2,000 to 5,000 hours at 105°C
- Solvent resistant type (see PRECAUTIONS AND GUIDELINES)
- RoHS Compliant




SPECIFICATIONS

Items	Characteristics										
Category	Temperature Range										
Temperature Range	-55 to +105℃										
Rated Voltage Range	6.3 to 100V _{dc}										
Capacitance Tolerance	±20% (M) (at 20℃, 120Hz)										
Leakage Current	I=0.01CV or 3μA, whichever is greater. Where, I : Max. leakage current (μA), C : Nominal capacitance (μF), V : Rated voltage (V) (at 20℃ after 2 minutes)										
Dissipation Factor (tanδ)	Rated voltage (V _{dc})	6.3V	10V	16V	25V	35V	50V	63V	80V	100V	
	tanδ (Max.)	0.22	0.19	0.16	0.14	0.12	0.10	0.10	0.09	0.08	
	When nominal capacitance exceeds 1,000μF, add 0.02 to the value above for each 1,000μF increase. (at 20℃, 120Hz)										
Low Temperature Characteristics	Capacitance change ΔC (-55℃/+20℃)				0.7min.						
	Max. impedance ratio (-55℃/+20℃)				3max.(6.3V _{dc} : 4max.)			(at 120Hz)			
Endurance	The following specifications shall be satisfied when the capacitors are restored to 20℃ after subjected to DC voltage with the rated ripple current is applied (the peak voltage shall not exceed the rated voltage) for the specified period of time at 105℃.										
	Time	φ5 to 6.3 : 2,000hours φ8 & 10 : 3,000hours φ12.5 to φ18 : 5,000hours									
	Capacitance change	≤±20% of the initial value									
	D.F. (tanδ)	≤200% of the initial specified value									
	Leakage current	≤The initial specified value									
Shelf Life	The following specifications shall be satisfied when the capacitors are restored to 20℃ after exposing them for 1,000 hours at 105℃ without voltage applied. Before the measurement, the capacitor shall be preconditioned by applying voltage according to Item 4.1 of JIS C 5101-4.										
	Capacitance change	≤±20% of the initial value									
	D.F. (tanδ)	≤200% of the initial specified value									
	Leakage current	≤The initial specified value									


DIMENSIONS [mm]

- Terminal Code : E

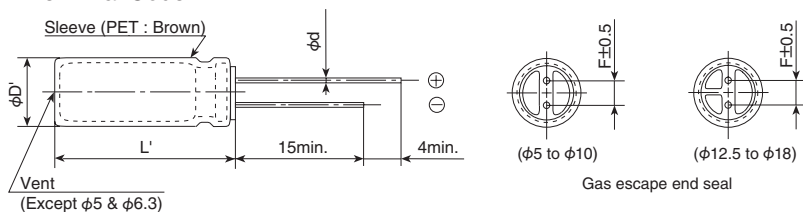

φD	5	6.3	8	10	12.5	16	18
φd	0.5	0.5	0.6	0.6	0.6	0.8	0.8
F	2.0	2.5	3.5	5.0	5.0	7.5	7.5
φD'	φD+0.5max.						
L'	L+1.5max.						

PART NUMBERING SYSTEM

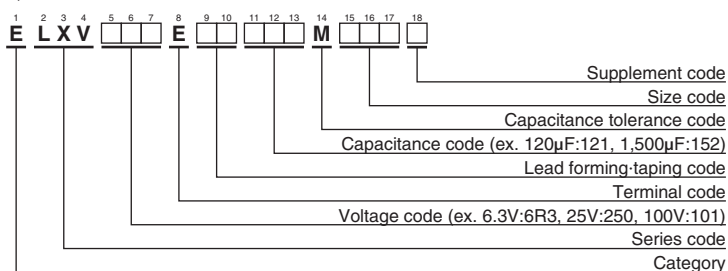

Please refer to "Product code guide (radial lead type)"

◆STANDARD RATINGS

WV (V _{dc})	Cap (μF)	Case size φD×L(mm)	Impedance (Ω _{max} /100kHz)		Rated ripple current (mA _{rms} / 105°C, 100kHz)	Part No.
			20°C	-10°C		
6.3	120	5×11.5	0.72	1.8	165	ELXV6R3E□□121MEB5D
	220	6.3×11.5	0.38	0.95	255	ELXV6R3E□□221MFB5D
	330	6.3×15	0.27	0.68	330	ELXV6R3E□□331MF15D
	390	8×12	0.20	0.50	415	ELXV6R3E□□391MH12D
	470	10×12.5	0.12	0.30	635	ELXV6R3E□□471MJC5S
	560	8×15	0.16	0.40	495	ELXV6R3E□□561MH15D
	680	10×16	0.084	0.21	825	ELXV6R3E□□681MJ16S
	820	8×20	0.11	0.28	640	ELXV6R3E□□821MH20D
	1,200	10×20	0.062	0.16	1,060	ELXV6R3E□□122MJ20S
	1,500	10×25	0.052	0.13	1,260	ELXV6R3E□□152MJ25S
	2,200	10×30	0.044	0.11	1,450	ELXV6R3E□□222MJ30S
	2,200	12.5×20	0.046	0.12	1,360	ELXV6R3E□□222MK20S
	2,700	12.5×25	0.034	0.085	1,700	ELXV6R3E□□272MK25S
	3,900	12.5×30	0.030	0.075	1,980	ELXV6R3E□□392MK30S
	3,900	16×20	0.038	0.095	1,770	ELXV6R3E□□392ML20S
	4,700	12.5×35	0.027	0.068	2,230	ELXV6R3E□□472MK35S
	5,600	12.5×40	0.024	0.060	2,460	ELXV6R3E□□562MK40S
	5,600	16×25	0.028	0.070	2,190	ELXV6R3E□□562ML25S
	5,600	18×20	0.036	0.090	1,940	ELXV6R3E□□562MM20S
	6,800	16×30	0.025	0.063	2,510	ELXV6R3E□□682ML30S
	6,800	18×25	0.027	0.068	2,350	ELXV6R3E□□682MM25S
8,200	16×35	0.022	0.055	2,770	ELXV6R3E□□822ML35S	
10,000	16×40	0.018	0.045	3,110	ELXV6R3E□□103ML40S	
10,000	18×30	0.024	0.060	2,720	ELXV6R3E□□103MM30S	
12,000	18×35	0.021	0.053	3,050	ELXV6R3E□□123MM35S	
15,000	18×40	0.017	0.043	3,300	ELXV6R3E□□153MM40S	
10	82	5×11.5	0.72	1.8	165	ELXV100E□□820MEB5D
	180	6.3×11.5	0.38	0.95	255	ELXV100E□□181MFB5D
	270	6.3×15	0.27	0.68	330	ELXV100E□□271MF15D
	330	8×12	0.20	0.50	415	ELXV100E□□331MH12D
	390	10×12.5	0.12	0.30	635	ELXV100E□□391MJC5S
	470	8×15	0.16	0.40	495	ELXV100E□□471MH15D
	680	8×20	0.11	0.28	640	ELXV100E□□681MH20D
	680	10×16	0.084	0.21	825	ELXV100E□□681MJ16S
	1,000	10×20	0.062	0.16	1,060	ELXV100E□□102MJ20S
	1,200	10×25	0.052	0.13	1,260	ELXV100E□□122MJ25S
	1,500	10×30	0.044	0.11	1,450	ELXV100E□□152MJ30S
	1,800	12.5×20	0.046	0.12	1,360	ELXV100E□□182MK20S
	2,200	12.5×25	0.034	0.085	1,700	ELXV100E□□222MK25S
	2,700	12.5×30	0.030	0.075	1,980	ELXV100E□□272MK30S
	3,300	12.5×35	0.027	0.068	2,230	ELXV100E□□332MK35S
	3,300	16×20	0.038	0.095	1,770	ELXV100E□□332ML20S
	3,900	12.5×40	0.024	0.060	2,460	ELXV100E□□392MK40S
	3,900	16×25	0.028	0.070	2,190	ELXV100E□□392ML25S
	3,900	18×20	0.036	0.090	1,940	ELXV100E□□392MM20S
	4,700	18×25	0.027	0.068	2,350	ELXV100E□□472MM25S
	5,600	16×30	0.025	0.063	2,510	ELXV100E□□562ML30S
6,800	16×35	0.022	0.055	2,770	ELXV100E□□682ML35S	
6,800	18×30	0.024	0.060	2,720	ELXV100E□□682MM30S	
8,200	16×40	0.018	0.045	3,110	ELXV100E□□822ML40S	
8,200	18×35	0.021	0.053	3,050	ELXV100E□□822MM35S	
10,000	18×40	0.017	0.043	3,300	ELXV100E□□103MM40S	
16	56	5×11.5	0.72	1.8	165	ELXV160E□□560MEB5D
	120	6.3×11.5	0.38	0.95	255	ELXV160E□□121MFB5D
	180	6.3×15	0.27	0.68	330	ELXV160E□□181MF15D
	270	8×12	0.20	0.50	415	ELXV160E□□271MH12D
	270	10×12.5	0.12	0.30	635	ELXV160E□□271MJC5S
	330	8×15	0.16	0.40	495	ELXV160E□□331MH15D
	470	8×20	0.11	0.28	640	ELXV160E□□471MH20D
	470	10×16	0.084	0.21	825	ELXV160E□□471MJ16S
	680	10×20	0.062	0.16	1,060	ELXV160E□□681MJ20S
	820	10×25	0.052	0.13	1,260	ELXV160E□□821MJ25S
	1,200	10×30	0.044	0.11	1,450	ELXV160E□□122MJ30S
	1,200	12.5×20	0.046	0.12	1,360	ELXV160E□□122MK20S
	1,500	12.5×25	0.034	0.085	1,700	ELXV160E□□152MK25S
	2,200	12.5×30	0.030	0.075	1,980	ELXV160E□□222MK30S
	2,200	16×20	0.038	0.095	1,770	ELXV160E□□222ML20S
	2,700	12.5×35	0.027	0.068	2,230	ELXV160E□□272MK35S
	2,700	16×25	0.028	0.070	2,190	ELXV160E□□272ML25S
	2,700	18×20	0.036	0.090	1,940	ELXV160E□□272MM20S
	3,300	12.5×40	0.024	0.060	2,460	ELXV160E□□332MK40S
	3,300	16×30	0.025	0.063	2,510	ELXV160E□□332ML30S
	3,300	18×25	0.027	0.068	2,350	ELXV160E□□332MM25S
4,700	12.5×40	0.024	0.060	2,460	ELXV160E□□472MK40S	
4,700	16×30	0.025	0.063	2,510	ELXV160E□□472ML30S	
4,700	18×25	0.027	0.068	2,350	ELXV160E□□472MM25S	
5,600	12.5×40	0.024	0.060	2,460	ELXV160E□□562MK40S	
5,600	16×30	0.025	0.063	2,510	ELXV160E□□562ML30S	
5,600	18×25	0.027	0.068	2,350	ELXV160E□□562MM25S	
6,800	12.5×40	0.024	0.060	2,460	ELXV160E□□682MK40S	
6,800	16×30	0.025	0.063	2,510	ELXV160E□□682ML30S	
6,800	18×25	0.027	0.068	2,350	ELXV160E□□682MM25S	
8,200	12.5×40	0.024	0.060	2,460	ELXV160E□□822MK40S	
8,200	16×30	0.025	0.063	2,510	ELXV160E□□822ML30S	
8,200	18×25	0.027	0.068	2,350	ELXV160E□□822MM25S	
10,000	12.5×40	0.024	0.060	2,460	ELXV160E□□103MK40S	
10,000	16×30	0.025	0.063	2,510	ELXV160E□□103ML30S	
10,000	18×25	0.027	0.068	2,350	ELXV160E□□103MM25S	
12,000	12.5×40	0.024	0.060	2,460	ELXV160E□□123MK40S	
12,000	16×30	0.025	0.063	2,510	ELXV160E□□123ML30S	
12,000	18×25	0.027	0.068	2,350	ELXV160E□□123MM25S	
15,000	12.5×40	0.024	0.060	2,460	ELXV160E□□153MK40S	
15,000	16×30	0.025	0.063	2,510	ELXV160E□□153ML30S	
15,000	18×25	0.027	0.068	2,350	ELXV160E□□153MM25S	
18,000	12.5×40	0.024	0.060	2,460	ELXV160E□□183MK40S	
18,000	16×30	0.025	0.063	2,510	ELXV160E□□183ML30S	
18,000	18×25	0.027	0.068	2,350	ELXV160E□□183MM25S	
22,000	12.5×40	0.024	0.060	2,460	ELXV160E□□223MK40S	
22,000	16×30	0.025	0.063	2,510	ELXV160E□□223ML30S	
22,000	18×25	0.027	0.068	2,350	ELXV160E□□223MM25S	
27,000	12.5×40	0.024	0.060	2,460	ELXV160E□□273MK40S	
27,000	16×30	0.025	0.063	2,510	ELXV160E□□273ML30S	
27,000	18×25	0.027	0.068	2,350	ELXV160E□□273MM25S	
33,000	12.5×40	0.024	0.060	2,460	ELXV160E□□333MK40S	
33,000	16×30	0.025	0.063	2,510	ELXV160E□□333ML30S	
33,000	18×25	0.027	0.068	2,350	ELXV160E□□333MM25S	
39,000	12.5×40	0.024	0.060	2,460	ELXV160E□□393MK40S	
39,000	16×30	0.025	0.063	2,510	ELXV160E□□393ML30S	
39,000	18×25	0.027	0.068	2,350	ELXV160E□□393MM25S	
47,000	12.5×40	0.024	0.060	2,460	ELXV160E□□473MK40S	
47,000	16×30	0.025	0.063	2,510	ELXV160E□□473ML30S	
47,000	18×25	0.027	0.068	2,350	ELXV160E□□473MM25S	
56,000	12.5×40	0.024	0.060	2,460	ELXV160E□□563MK40S	
56,000	16×30	0.025	0.063	2,510	ELXV160E□□563ML30S	
56,000	18×25	0.027	0.068	2,350	ELXV160E□□563MM25S	
68,000	12.5×40	0.024	0.060	2,460	ELXV160E□□683MK40S	
68,000	16×30	0.025	0.063	2,510	ELXV160E□□683ML30S	
68,000	18×25	0.027	0.068	2,350	ELXV160E□□683MM25S	
82,000	12.5×40	0.024	0.060	2,460	ELXV160E□□823MK40S	
82,000	16×30	0.025	0.063	2,510	ELXV160E□□823ML30S	
82,000	18×25	0.027	0.068	2,350	ELXV160E□□823MM25S	
100,000	12.5×40	0.024	0.060	2,460	ELXV160E□□100MK40S	
100,000	16×30	0.025	0.063	2,510	ELXV160E□□100ML30S	
100,000	18×25	0.027	0.068	2,350	ELXV160E□□100MM25S	
120,000	12.5×40	0.024	0.060	2,460	ELXV160E□□120MK40S	
120,000	16×30	0.025	0.063	2,510	ELXV160E□□120ML30S	
120,000	18×25	0.027	0.068	2,350	ELXV160E□□120MM25S	
150,000	12.5×40	0.024	0.060	2,460	ELXV160E□□150MK40S	
150,000	16×30	0.025	0.063	2,510	ELXV160E□□150ML30S	
150,000	18×25	0.027	0.068	2,350	ELXV160E□□150MM25S	
180,000	12.5×40	0.024	0.060	2,460	ELXV160E□□180MK40S	
180,000	16×30	0.025	0.063	2,510	ELXV160E□□180ML30S	
180,000	18×25	0.027	0.068	2,350	ELXV160E□□180MM25S	
220,000	12.5×40	0.024	0.060	2,460	ELXV160E□□220MK40S	
220,000	16×30	0.025	0.063	2,510	ELXV160E□□220ML30S	
220,000	18×25	0.027	0.068	2,350	ELXV160E□□220MM25S	
270,000	12.5×40	0.024	0.060	2,460	ELXV160E□□270MK40S	
270,000	16×30	0.025	0.063	2,510	ELXV160E□□270ML30S	
270,000	18×25	0.027	0.068	2,350	ELXV160E□□270MM25S	
330,000	12.5×40	0.024	0.060	2,460	ELXV160E□□330MK40S	
330,000	16×30	0.025	0.063	2,510	ELXV160E□□330ML30S	
330,000	18×25	0.027	0.068	2,350	ELXV160E□□330MM25S	
390,000	12.5×40	0.024	0.060	2,460	ELXV160E□□390MK40S	
390,000	16×30	0.025	0.063	2,510	ELXV160E□□390ML30S	
390,000	18×25	0.027	0.068	2,350	ELXV160E□□390MM25S	
470,000	12.5×40	0.024	0.060	2,460	ELXV160E□□470MK40S	
470,000	16×30	0.025	0.063			

◆STANDARD RATINGS

WV (Vdc)	Cap (μF)	Case size φD×L(mm)	Impedance (Ωmax/100kHz)		Rated ripple current (mA rms/ 105°C, 100kHz)	Part No.
			20°C	-10°C		
50	82	8 × 15	0.24	0.72	505	ELXV500E□□820MH15D
	82	10 × 12.5	0.16	0.40	530	ELXV500E□□820MJC5S
	120	8 × 20	0.18	0.52	610	ELXV500E□□121MH20D
	120	10 × 16	0.12	0.30	755	ELXV500E□□121MJ16S
	180	10 × 20	0.088	0.22	945	ELXV500E□□181MJ20S
	220	10 × 25	0.068	0.17	1,150	ELXV500E□□221MJ25S
	330	10 × 30	0.059	0.15	1,260	ELXV500E□□331MJ30S
	330	12.5 × 20	0.059	0.15	1,190	ELXV500E□□331MK20S
	470	12.5 × 25	0.045	0.11	1,500	ELXV500E□□471MK25S
	560	12.5 × 30	0.039	0.098	1,720	ELXV500E□□561MK30S
	680	12.5 × 35	0.033	0.083	1,900	ELXV500E□□681MK35S
	680	16 × 20	0.043	0.11	1,500	ELXV500E□□681ML20S
	820	12.5 × 40	0.029	0.073	2,120	ELXV500E□□821MK40S
	820	16 × 25	0.033	0.083	1,880	ELXV500E□□821ML25S
	820	18 × 20	0.039	0.098	1,660	ELXV500E□□821MM20S
	1,000	16 × 30	0.029	0.073	2,150	ELXV500E□□102ML30S
	1,000	18 × 25	0.030	0.075	2,020	ELXV500E□□102MM25S
	1,200	16 × 35	0.025	0.063	2,320	ELXV500E□□122ML35S
	1,500	16 × 40	0.021	0.053	2,650	ELXV500E□□152ML40S
	1,500	18 × 30	0.026	0.065	2,340	ELXV500E□□152MM30S
	1,800	18 × 35	0.023	0.058	2,620	ELXV500E□□182MM35S
	2,200	18 × 40	0.020	0.050	2,790	ELXV500E□□222MM40S
63	12	5 × 11.5	1.9	4.8	100	ELXV630E□□120MEB5D
	27	6.3 × 11.5	1.1	2.8	160	ELXV630E□□270MFB5D
	39	6.3 × 15	0.62	1.6	230	ELXV630E□□390MF15D
	47	8 × 12	0.49	1.3	275	ELXV630E□□470MH12D
	56	10 × 12.5	0.27	0.68	420	ELXV630E□□560MJC5S
	68	8 × 15	0.34	0.85	360	ELXV630E□□680MH15D
	68	10 × 16	0.21	0.53	523	ELXV630E□□680MJ16S
	82	8 × 20	0.21	0.53	500	ELXV630E□□820MH20D
	120	10 × 20	0.16	0.40	650	ELXV630E□□121MJ20S
	150	10 × 25	0.13	0.33	780	ELXV630E□□151MJ25S
	180	10 × 30	0.10	0.25	960	ELXV630E□□181MJ30S
	220	12.5 × 20	0.11	0.28	870	ELXV630E□□221MK20S
	270	12.5 × 25	0.074	0.19	1,150	ELXV630E□□271MK25S
	390	12.5 × 30	0.068	0.17	1,280	ELXV630E□□391MK30S
	390	16 × 20	0.085	0.22	1,100	ELXV630E□□391ML20S
	470	12.5 × 35	0.063	0.16	1,390	ELXV630E□□471MK35S
	470	16 × 25	0.055	0.14	1,480	ELXV630E□□471ML25S
	560	12.5 × 40	0.051	0.13	1,530	ELXV630E□□561MK40S
	560	18 × 20	0.085	0.22	1,170	ELXV630E□□561MM20S
	680	16 × 30	0.046	0.12	1,720	ELXV630E□□681ML30S
	680	18 × 25	0.055	0.14	1,520	ELXV630E□□681MM25S
	820	16 × 35	0.040	0.10	1,910	ELXV630E□□821ML35S
	820	18 × 30	0.046	0.12	1,770	ELXV630E□□821MM30S
	1,000	16 × 40	0.036	0.09	2,070	ELXV630E□□102ML40S
	1,000	18 × 35	0.040	0.10	1,970	ELXV630E□□102MM35S
	1,200	18 × 40	0.036	0.09	2,130	ELXV630E□□122MM40S
80	8.2	5 × 11.5	1.9	5.1	100	ELXV800E□□8R2MEB5D
	18	6.3 × 11.5	1.1	3.0	150	ELXV800E□□180MFB5D
80	27	6.3 × 15	0.62	1.7	220	ELXV800E□□270MF15D
	33	8 × 12	0.53	1.5	275	ELXV800E□□330MH12D
	39	10 × 12.5	0.47	1.3	380	ELXV800E□□390MJC5S
	47	8 × 15	0.35	0.97	360	ELXV800E□□470MH15D
	56	8 × 20	0.27	0.74	490	ELXV800E□□560MH20D
	56	10 × 16	0.33	0.90	500	ELXV800E□□560MJ16S
	82	10 × 20	0.26	0.70	620	ELXV800E□□820MJ20S
	100	10 × 25	0.19	0.52	795	ELXV800E□□101MJ25S
	150	10 × 30	0.15	0.41	955	ELXV800E□□151MJ30S
	150	12.5 × 20	0.15	0.41	890	ELXV800E□□151MK20S
	180	12.5 × 25	0.11	0.30	1,040	ELXV800E□□181MK25S
	270	12.5 × 30	0.094	0.26	1,270	ELXV800E□□271MK30S
	270	16 × 20	0.11	0.30	1,240	ELXV800E□□271ML20S
	330	12.5 × 35	0.087	0.24	1,450	ELXV800E□□331MK35S
	330	16 × 25	0.081	0.22	1,440	ELXV800E□□331ML25S
	390	12.5 × 40	0.060	0.17	1,610	ELXV800E□□391MK40S
	390	18 × 20	0.085	0.23	1,450	ELXV800E□□391MM20S
	470	16 × 30	0.058	0.16	1,790	ELXV800E□□471ML30S
	470	18 × 25	0.070	0.19	1,650	ELXV800E□□471MM25S
	560	16 × 35	0.052	0.14	2,000	ELXV800E□□561ML35S
	680	16 × 40	0.041	0.11	2,200	ELXV800E□□681ML40S
	680	18 × 30	0.058	0.16	1,850	ELXV800E□□681MM30S
	820	18 × 35	0.052	0.14	1,990	ELXV800E□□821MM35S
	1,000	18 × 40	0.041	0.11	2,370	ELXV800E□□102MM40S
100	5.6	5 × 11.5	1.9	5.1	100	ELXV101E□□5R6MEB5D
	12	6.3 × 11.5	1.1	3.0	150	ELXV101E□□120MFB5D
	18	6.3 × 15	0.62	1.7	220	ELXV101E□□180MF15D
	22	8 × 12	0.53	1.5	275	ELXV101E□□220MH12D
	27	10 × 12.5	0.47	1.3	380	ELXV101E□□270MJC5S
	33	8 × 15	0.35	0.97	360	ELXV101E□□330MH15D
	33	10 × 16	0.33	0.90	500	ELXV101E□□330MJ16S
	39	8 × 20	0.27	0.74	490	ELXV101E□□390MH20D
	56	10 × 20	0.26	0.70	620	ELXV101E□□560MJ20S
	68	10 × 25	0.19	0.52	795	ELXV101E□□680MJ25S
	100	10 × 30	0.15	0.41	955	ELXV101E□□101MJ30S
	100	12.5 × 20	0.15	0.41	890	ELXV101E□□101MK20S
	120	12.5 × 25	0.11	0.30	1,040	ELXV101E□□121MK25S
	180	12.5 × 30	0.094	0.26	1,270	ELXV101E□□181MK30S
	180	16 × 20	0.11	0.30	1,240	ELXV101E□□181ML20S
	220	12.5 × 35	0.087	0.24	1,450	ELXV101E□□221MK35S
	220	16 × 25	0.081	0.22	1,440	ELXV101E□□221ML25S
	270	12.5 × 40	0.060	0.17	1,610	ELXV101E□□271MK40S
	270	18 × 20	0.085	0.23	1,450	ELXV101E□□271MM20S
	330	16 × 30	0.058	0.16	1,790	ELXV101E□□331ML30S
	330	18 × 25	0.070	0.19	1,650	ELXV101E□□331MM25S
	390	16 × 35	0.052	0.14	2,000	ELXV101E□□391ML35S
	390	18 × 30	0.058	0.16	1,850	ELXV101E□□391MM30S
	470	16 × 40	0.041	0.11	2,200	ELXV101E□□471ML40S
	560	18 × 35	0.052	0.14	1,990	ELXV101E□□561MM35S
	680	18 × 40	0.041	0.11	2,370	ELXV101E□□681MM40S

□ □ : Enter the appropriate lead forming or taping code.

◆RATED RIPPLE CURRENT MULTIPLIERS

●Frequency Multipliers

Rated voltage (Vdc)	Case size φD (mm)	Frequency (Hz)				Rated voltage (Vdc)	Case size φD (mm)	Frequency (Hz)			
		120	1k	10k	100k			120	1k	10k	100k
6.3 & 10	5 to 8	0.65	0.83	0.95	1.00	35 & 50	5 to 8	0.40	0.66	0.85	1.00
	10 & 12.5	0.70	0.85	0.96	1.00		10 & 12.5	0.50	0.73	0.89	1.00
	16 & 18	0.85	0.92	0.97	1.00		16 & 18	0.60	0.81	0.94	1.00
16 & 25	5 to 8	0.55	0.76	0.91	1.00	63 to 100	5 to 8	0.20	0.55	0.80	1.00
	10 & 12.5	0.65	0.83	0.93	1.00		10 & 12.5	0.35	0.65	0.85	1.00
	16 & 18	0.70	0.87	0.96	1.00		16 & 18	0.50	0.75	0.90	1.00

The endurance of capacitors is reduced with internal heating produced by ripple current at the rate of halving the lifetime with every 5°C rise.

When long life performance is required in actual use, the rms ripple current has to be reduced.