
This document was generated on 10/27/2017

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: 0010894082
Status: Active
Overview: C-Grid® Products
Description: 2.54mm Pitch C-Grid Breakaway Header, High Profile, Dual Row, Right Angle, 8 Circuits, 6.10mm Mating Pin Length, 0.38µm Gold (Au) Selective Plating

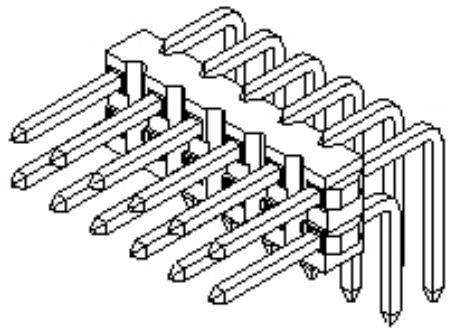

Series image - Reference only

Documents:

3D Model
Drawing (PDF)
Product Specification PS-70216-001 (PDF)
Product Specification TS-70541-001-001 (PDF)
RoHS Certificate of Compliance (PDF)

Agency Certification

CSA	LR19980
UL	E29179

General

Product Family	PCB Headers
Series	70216
Application	Board-to-Board, Signal, Wire-to-Board
Overview	C-Grid® Products
Product Name	C-Grid
UPC	800753513662

Physical

Breakaway	Yes
Circuits (Loaded)	8
Circuits (maximum)	8
Color - Resin	Black
Durability (mating cycles max)	50
Flammability	94V-0
Glow-Wire Compliant	No
Lock to Mating Part	None
Material - Metal	Brass, Phosphor Bronze
Material - Plating Mating	Gold
Material - Plating Termination	Tin
Material - Resin	Polyester
Net Weight	0.653/g
Number of Rows	2
Orientation	Right Angle
PC Tail Length	2.79mm
PCB Locator	No
PCB Retention	None
Packaging Type	Tube
Pitch - Mating Interface	2.54mm
Plating min - Mating	3.810µm
Plating min - Termination	3.810µm
Polarized to Mating Part	No
Polarized to PCB	No
Shrouded	No
Stackable	Yes
Temperature Range - Operating	-40°C to +105°C
Termination Interface: Style	Through Hole

Electrical

Current - Maximum per Contact	3.0A
Voltage - Maximum	250V

Solder Process Data

EU ELV
Not Relevant

EU RoHS | **China RoHS**
Compliant

REACH SVHC
Not Contained Per -ED/01/2017 (12 January 2017)

Halogen-Free Status
Not Low-Halogen

Need more information on product environmental compliance?

Email productcompliance@molex.com
Please visit the Contact Us section for any non-product compliance questions.

China ROHS	Green Image
ELV	Not Relevant
RoHS Phthalates	Not Contained

Search Parts in this Series
70216 Series

Duration at Max. Process Temperature (seconds)	005
Lead-freeProcess Capability	WAVE
Max. Cycles at Max. Process Temperature	001
Process Temperature max. C	235

Material Info

Engineering Number	70216-0237

Reference - Drawing Numbers

Product Specification	PS-70216-001, TS-70541-001-001
Sales Drawing	SD-70216-001, SD-70216-001-002

This document was generated on 10/27/2017

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION