

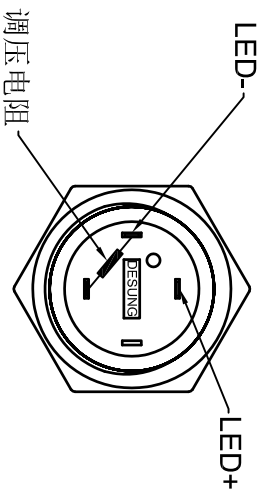


- 备注:
1. 外壳镗雕A3;
 2. 拧螺母，配垫圈。

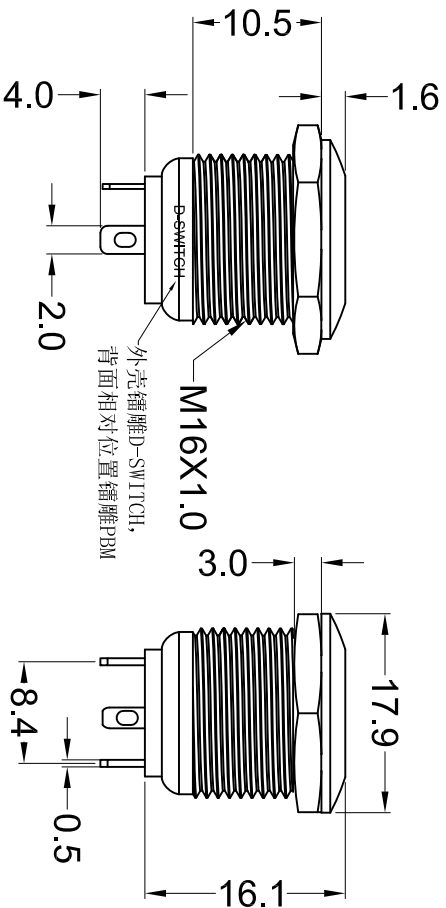

Nut Torque: 5~14Nm
 Protection Grade: IP65, IK08
 Shell: Brass, Ni Plating
 Base: PBT+15%GF
 Lamp Type: LED
 Forward current : 20mA Max
 Lamp Life: 50000H
 Beads Color: Orange
 Lamp voltage: 24V DC
 Operating Temperature: -20°C~80°C
 Relative Air Humidity: 45%~85%
 Safety Approval:

CUT-OUT ± 0.1
 $\phi 16.1 \pm 0.05$

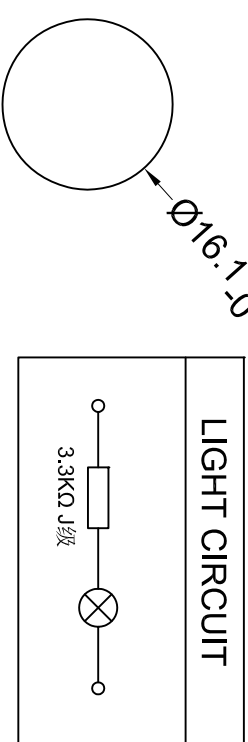

D·SWITCH
 东莞市德禄电子有限公司
 D-SWITCH ELECTRONICS CO.,LTD

公差 TOLERANCES: .X \pm 0.5 .XX \pm 0.3 角度 ANGLE $\pm 1^\circ$ 单位 DIMENSION UNIT mm.

版本 VER	变更说明 CHANGE DESCRIPTION	日期 DATE	ECON NO.	核准	核对	绘图	品名	TITLE	图号	DRAWING NO
				版本 VERSION	比例尺 SCALE	日期 DATE	日期 DATE			
				A0	1:1	2022.03.10	2022.03.10			
				APPROVED BY	CHECKED BY	DRAWN BY	PBM-16111-FS-01-A24-B8S-A3-0004			1030430
						孙成				