
Pomona®

Model 1269
BNC (Female) To Double Stacking Banana Plugs

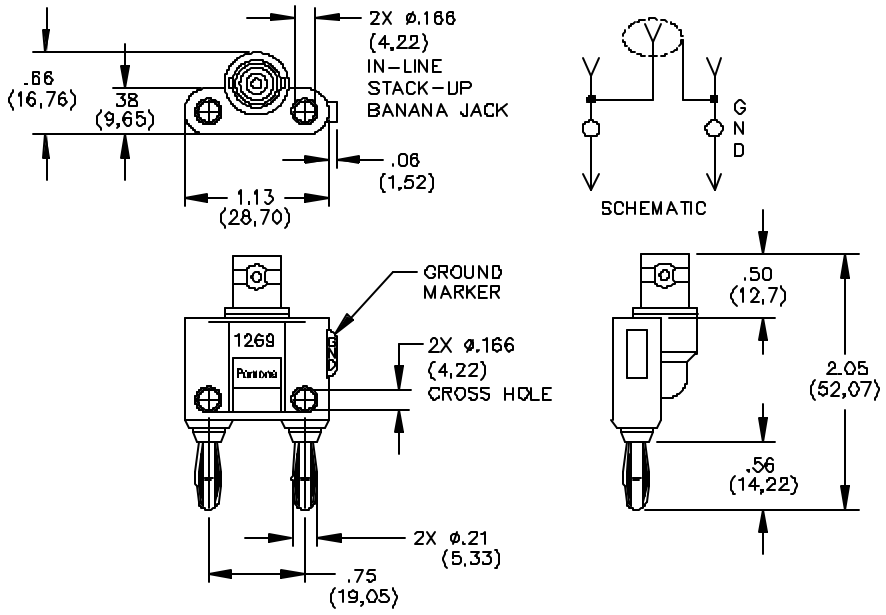

FEATURES:

- Adapter converts Double Banana Jack Test Instruments to BNC Coaxial configuration for added shielding protection.
- For test versatility, banana plugs can be vertically and horizontally stacked to the adapter.
- Banana Plug features Nickel Plated, Beryllium Copper for tarnish resistance & long insertion life.
- The BNC center contact is Gold Plated, Beryllium Copper for low contact resistance
- The BNC shell is plated for tarnish resistance.

MATERIALS: BNC (Female):
Body: Brass, Nickel Plated, Dielectric: PTFE
Center Contact: Beryllium Copper, Gold Plate
Banana Plug - Body: Brass, Nickel Plated
Spring: Beryllium Copper, Nickel Plated
Insulation - ABS Molded to BNC (Female) and Banana Plug Bodies, Color: Black
Marking: "1269 POMONA"

RATINGS:
Operating Voltage: Hand-held testing: 30VAC/60VDC Max.
Hands free testing in controlled voltage environments: 500 VRMS Max.
Operating Temperature: +50°C (+122°F) Max.

ORDERING INFORMATION: Model 1269

All dimensions are in inches and metric. All specifications are to the latest revisions. Specifications are subject to change without notice.
Registered trademarks are the property of their respective companies. Made in USA

Sales: 800-490-2361 Fax: 888-403-3360
Technical Assistance: 800-241-2060

Pomona*ACCESS* **90497** (800) 444-6785 or (425) 446-6010
More drawings available at www.pomonaelectronics.com