

AVD100 Series

100 - 120 Watts

Data Sheet


Total Power: 100 - 120 Watts
Input Voltage: 36 - 75V
of Outputs: Single

SPECIAL FEATURES

- 2:1 wide input range
- Optimised for high density, small space applications
- Low ripple and noise
- Fixed switching frequency
- High efficiency
- High capacitive load capability
- Pre-bias start-up capability
- Basic insulation system
- Through-hole or SMT termination
- Openframe structure with Baseplate option
- Output over current protection

SAFETY

- UL, cUL: UL60950
- TUV/CE: IEC/EN60950

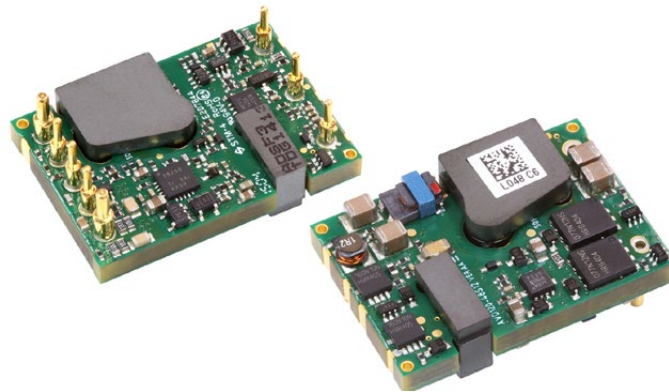

Electrical Specifications

Input	
Input range	36 - 75 VDC
Efficiency	5V: 92.5% @ full load; 93.5% @ half load
Output	
Voltage tolerance	+/-1.5%
Line regulation	0.2%
Load regulation	Single output: 0.5%
Noise/ripple	120 mV
Over voltage protection Over temperature protection	Auto-restart
Switching frequency	250 KHz
Temperature coefficient	±0.02 /°C
Isolation	
I/O isolation	1500 VDC min.

Specifications

Operating ambient temperature range	-40 °C to +85 °C
Storage temperature	-55 °C to +125 °C
Humidity	5% to 95% (non-condensing)
MTBF	2 Million hours
RoHS Compliant	

Ordering Information

Model number	Input voltage	Output voltage	Power
AVD100-48S05-6L	36 - 75 Vin	5 V @ 20 A	100 W
AVD100-48S05B-6L	36 - 75 Vin	5 V @ 20 A	100 W
AVD100-48S05TL	36 - 75 Vin	5 V @ 20 A	100 W
AVD120-48S12-6L	36 - 75 Vin	12 V @ 10 A	120 W
AVD120-48S12B-6L	36 - 75 Vin	12 V @ 10 A	120 W
AVD120-48S12TL	36 - 75 Vin	12 V @ 10 A	120 W

Notes:

Standard version is negative enable

“-6” = 3.8 mm pin length


“B” = Baseplate version

“T” = Surface mount, reel tape package

“L” = RoHS 6 compliance

“P” = Positive enable

Mechanical Drawings

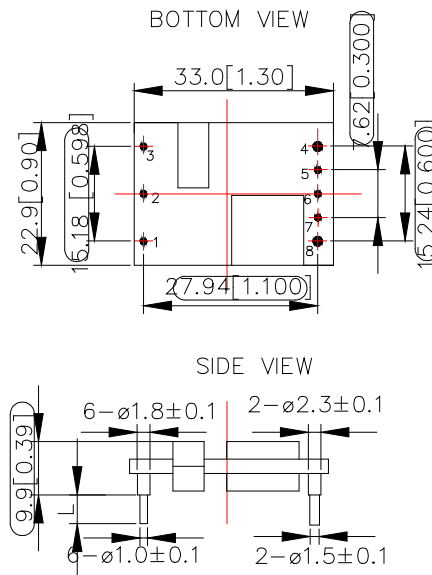

UNIT: mm[inch]=3.80±0.25mm

TOLERANCE: X.Xmm±0.5mm[X.XX in.±0.02in.]
X.XXmm±0.25mm[X.XXX in.±0.01in.]

Notes:

1. All specifications are subject to change without notice. Mechanical drawings are for reference only.
2. Warranty: 2 years
3. Label and logo appearance may vary from what is shown on mechanical drawings.

Pin Assignments

Pin #	Function
1	+V in
2	Remote On/Off
3	-V in
4	-V out
5	- Sense
6	Trim
7	+Sense
8	+V out

WORLDWIDE OFFICES

Americas

2900 S.Diablo Way
 Tempe, AZ 85282
 USA
 +1 888 412 7832

Europe (UK)

Waterfront Business Park
 Merry Hill, Dudley
 West Midlands, DY5 1LX
 United Kingdom
 +44 (0) 1384 842 211

Asia (HK)

14/F, Lu Plaza
 2 Wing Yip Street
 Kwun Tong, Kowloon
 Hong Kong
 +852 2176 3333



www.artesyn.com

While every precaution has been taken to ensure accuracy and completeness in this literature, Artesyn Embedded Technologies assumes no responsibility, and disclaims all liability for damages resulting from use of this information or for any errors or omissions. Artesyn Embedded Technologies, Artesyn and the Artesyn Embedded Technologies logo are trademarks and service marks of Artesyn Embedded Technologies, Inc. All other names and logos referred to are trade names, trademarks, or registered trademarks of their respective owners.
 © 2015 Artesyn Embedded Technologies, Inc.

For more information: www.artesyn.com/power
 For support: productsupport.ep@artesyn.com