

Silicon NPN RF Transistor

DESCRIPTION


- Low Noise Figure
NF = 1.8 dB TYP. @ $V_{CE} = 6\text{ V}$, $I_C = 2\text{ mA}$, $f = 900\text{ MHz}$
- High Gain
 $|S_{21e}|^2 = 12.5\text{ dB TYP. @ } V_{CE} = 8\text{ V}, I_C = 15\text{ mA}, f = 900\text{ MHz}$

APPLICATIONS

- Designed for low distortion broadband amplifiers and oscillators.

ABSOLUTE MAXIMUM RATINGS($T_a=25^\circ\text{C}$)

SYMBOL	PARAMETER	VALUE	UNIT
V_{CBO}	Collector-Base Voltage	20	V
V_{CES}	Collector-Emitter Voltage	20	V
V_{CEO}	Collector-Emitter Voltage	15	V
V_{EBO}	Emitter-Base Voltage	2.5	V
I_C	Collector Current-Continuous	30	mA
I_B	Base Current-Continuous	4	mA
P_C	Collector Power Dissipation @ $T_c=25^\circ\text{C}$	0.28	W
T_J	Junction Temperature	150	$^\circ\text{C}$
T_{stg}	Storage Temperature Range	-65~150	$^\circ\text{C}$

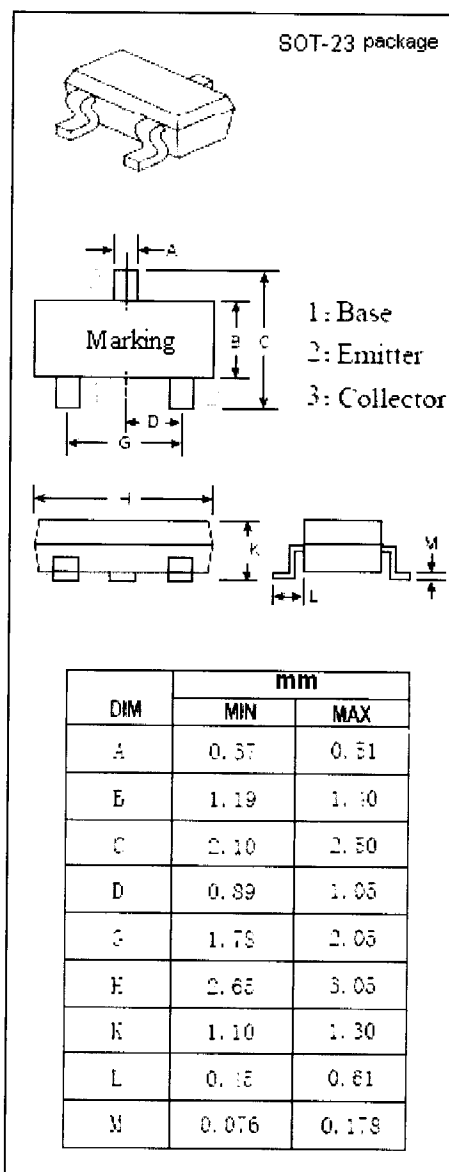

NJ Semi-Conductors reserves the right to change test conditions, parameter limits and package dimensions without notice. Information furnished by NJ Semi-Conductors is believed to be both accurate and reliable at the time of going to press. However, NJ Semi-Conductors assumes no responsibility for any errors or omissions discovered in its use. NJ Semi-Conductors encourages customers to verify that datasheets are current before placing orders.

Silicon NPN RF Transistor

BFR35AP

ELECTRICAL CHARACTERISTICS

$T_C=25^{\circ}\text{C}$ unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP.	MAX	UNIT
$V_{(BR)CEO}$	Collector-Emitter Breakdown Voltage	$I_C=1\text{mA}; I_B=0$	15			V
I_{CES}	Collector Cutoff Current	$V_{CE}=20\text{V}; V_{BE}=0$			10	μA
I_{CBO}	Collector Cutoff Current	$V_{CB}=10\text{V}; I_E=0$			0.1	μA
I_{EBO}	Emitter Cutoff Current	$V_{EB}=2.5\text{V}; I_C=0$			100	μA
h_{FE}	DC Current Gain	$I_C=15\text{mA}; V_{CE}=8\text{V}$	40		200	
f_T	Current-Gain—Bandwidth Product	$I_C=15\text{mA}; V_{CE}=8\text{V}; f=500\text{MHz}$	3.5	5		GHz
C_{OB}	Output Capacitance	$I_E=0; V_{CB}=10\text{V}; f=1\text{MHz}$		0.38	0.6	pF
PG	Power Gain	$I_C=15\text{mA}; V_{CE}=8\text{V}; f=900\text{MHz}$		15		dB
PG	Power Gain	$I_C=15\text{mA}; V_{CE}=8\text{V}; f=1.8\text{GHz}$		9.5		dB
$ S_{21e} ^2$	Insertion Power Gain	$I_C=15\text{mA}; V_{CE}=8\text{V}; f=900\text{MHz}$		12.5		dB
$ S_{21e} ^2$	Insertion Power Gain	$I_C=15\text{mA}; V_{CE}=8\text{V}; f=1.8\text{GHz}$		7		dB
NF	Noise Figure	$I_C=2\text{mA}; V_{CE}=6\text{V}; f=900\text{MHz}$		1.8		dB
NF	Noise Figure	$I_C=2\text{mA}; V_{CE}=6\text{V}; f=1.8\text{GHz}$		2.9		dB