

SEA&LAND ELECTRONIC CORP.

13F., No.120-10,
Sec. 3, Zhongshan Rd., Zhonghe Dist., New Taipei City 235,
Taiwan
Tel.: 886-2-8221-2567
Fax.: 886-2-2225-7268

Techfuse
PTC Devices
Resettable Fuse

PRODUCT: SMD0603-005
DOCUMENT: QR0429
ECN. NO.:
REV LETTER: B
REV DATE: 2014/3/31
PAGE NO.: 1 of 1

Specification Sheet

Terminal Pad Solderability:
Meets EIA Specification RS186-9E
And ANSI/J-STD-002 Category 3.

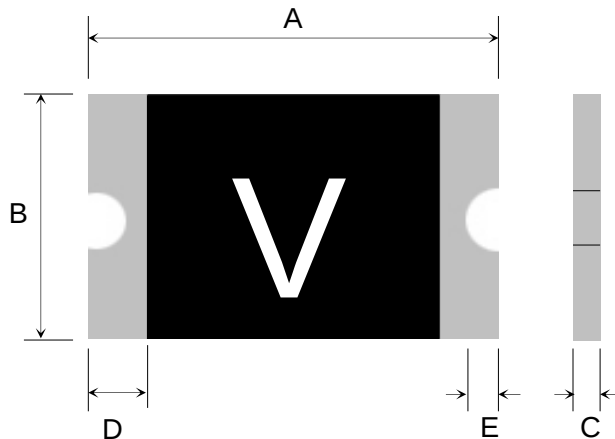
Terminal Pad Materials:
Tin-plated Nickel-Copper

Lead-Free, RoHS Compliant

Marking:

Part Identification

V= 005

**TABLE I. DIMENSIONS:**

Model	Marking	A		B		C		D	E
		Min.	Max.	Min.	Max.	Min.	Max.	Min.	Min.
SMD0603-005	V	1.45	1.85	0.65	1.05	0.40	1.00	0.15	0.10

Unit:mm

TABLE II. PERFORMANCE RATINGS:

Model	Marking	$V_{\max}$ (Vdc)	$I_{\max}$ (A)	I_{hold} @25°C (A)	I_{trip} @25°C (A)	P_d Typ. (W)	Maximum Time To Trip		Resistance	
							Current (A)	Time (Sec)	$R_{\min}$ (Ω)	$R_{\max}$ (Ω)
SMD0603-005	V	15.0	40	0.05	0.20	0.50	0.5	1.00	2.000	10.000

Order Information**Packaging**

SMD0603	005	Tape & Reel Quantity	
Product name	Hold	Max	5,000 pcs/reel
Size 1508 mm / 0603 mils	Current	voltage	
SMD: surface mount device	0.05A		

Recognition: UL Pending.