

Features

- $\pm 10\text{ppm}/\pm 10\text{ppm}$ (Tolerance/Stability) Available
- Miniature Package
- AT-Cut Fundamental
- Tape and Reel


Applications

- Microprocessors
- PCMCIA
- Communication
- Test Equipment



Part Numbering Guide

SXT 63 4 18 A A 48 T - 14.318M

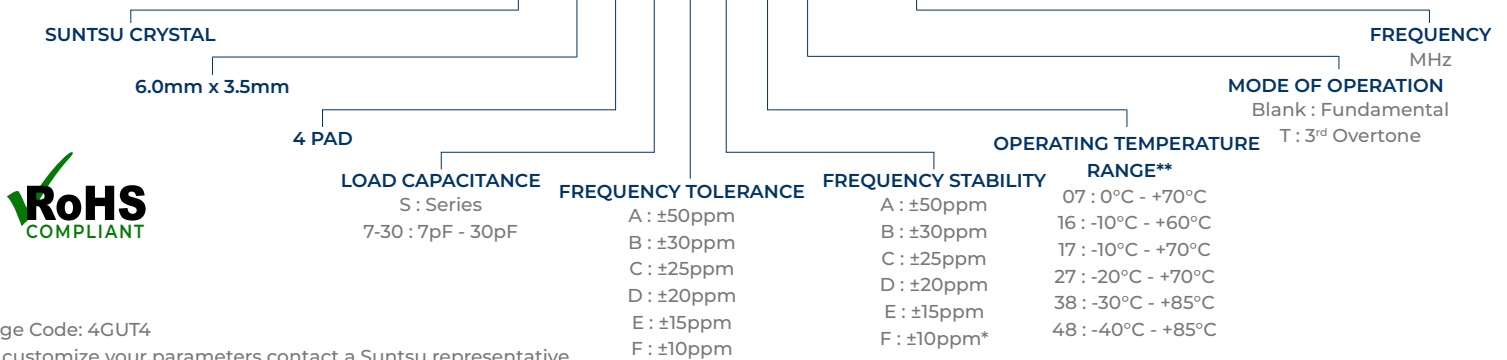

Cage Code: 4GUT4


To customize your parameters contact a Suntsu representative.

* For frequency stability option F contact a Suntsu representative. ** For operating temperatures of -55-125°C a Suntsu representative.

Electrical Parameters	Units	Minimum	Typical	Maximum	Remarks
Frequency Range	MHz	8		54	AT-Cut Fundamental.
Frequency Range	MHz	40		80	3rd Overtone
Frequency Tolerance at +25°C	ppm	-10		+10	See part numbering guide for options.
Frequency Stability vs. Op Temp	ppm	-10		+10	See part numbering guide for options.
Frequency Stability vs. Aging	ppm	-3		+3	First year @ +25°C.
Operating Temperature	°C	-40		+85	See part numbering guide for options.
Storage Temperature	°C	-40		+125	
Load Capacitance	pF	7		30	See part numbering guide for options.
Shunt Capacitance	pF			7	
Drive Level	μW		10	300	
Insulation Resistance	M Ω	500			@ 100VDC $\pm$ 15V.
7.000MHz ~ 11.999MHz	Ω			100	AT-Cut Fundamental
12.000MHz ~ 14.999MHz	Ω			60	AT-Cut Fundamental
ESR - 15.000MHz ~ 29.999MHz	Ω			50	AT-Cut Fundamental
30.000MHz ~ 54.000MHz	Ω			40	AT-Cut Fundamental
40.000MHz ~ 80.000MHz	Ω			80	3rd Overtone


Outline Drawing & Recommended Landed Pattern

All dimensions are in millimeters (mm) unless otherwise noted. Drawings are not to scale.

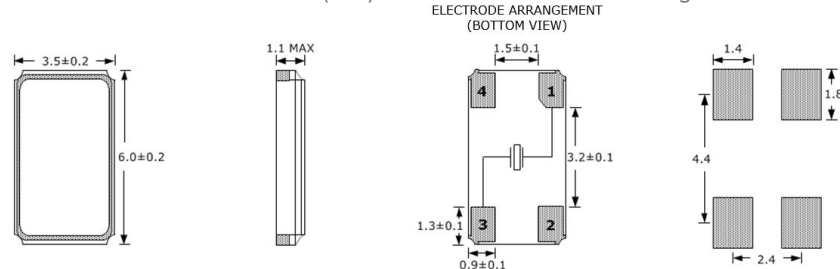

Environmental Specifications		Mechanical Specifications	
Temperature Cycling	MIL-STD-883, Method 1010, Condition B	Mechanical Shock	MIL-STD-202, Method 213, Condition B
Fine Leak Test	MIL-STD-883, Method 1014, Condition A	Vibration	MIL-STD-883, Method 2007, Condition A
Gross Leak Test	MIL-STD-883, Method 1014, Condition C	Resistance to Soldering Heat	MIL-STD-202, Method 210, Condition K
Moisture Resistance	MIL-STD-883, Method 1004	Resistance to Solvents	MIL-STD-202, Method 215
Moisture Sensitivity	J-STD-020, MSL 1	Solderability	MIL-STD-883, Method 2003

Reflow Profile & Part Marking

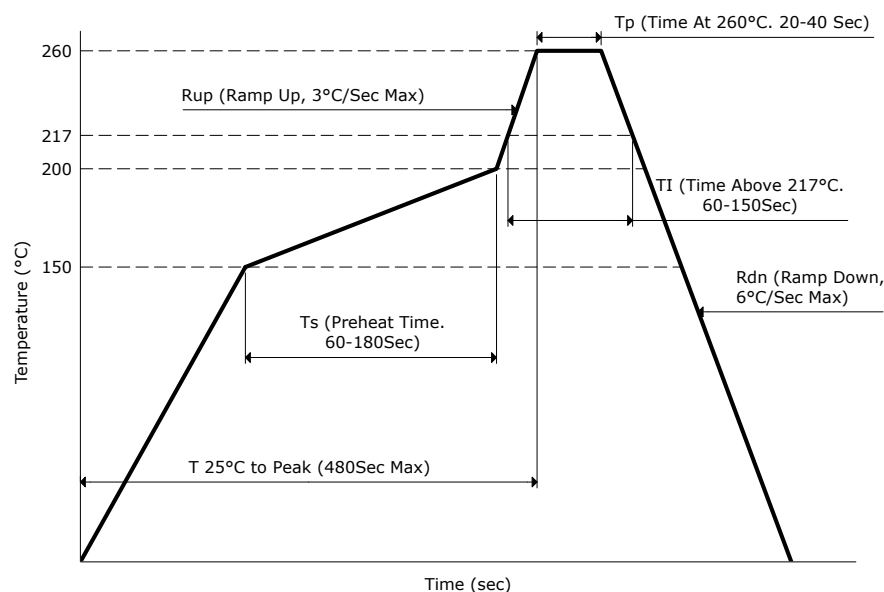

Frequency in MHz

Line 1: X X.X X X

Line 2: S F Y W W


Suntsu
Manufacturing
Identifier

Week
Year

Tape And Reel Dimensions

All dimensions are in millimeters (mm) unless otherwise noted. Drawings are not to scale.

1,000pcs / Reel

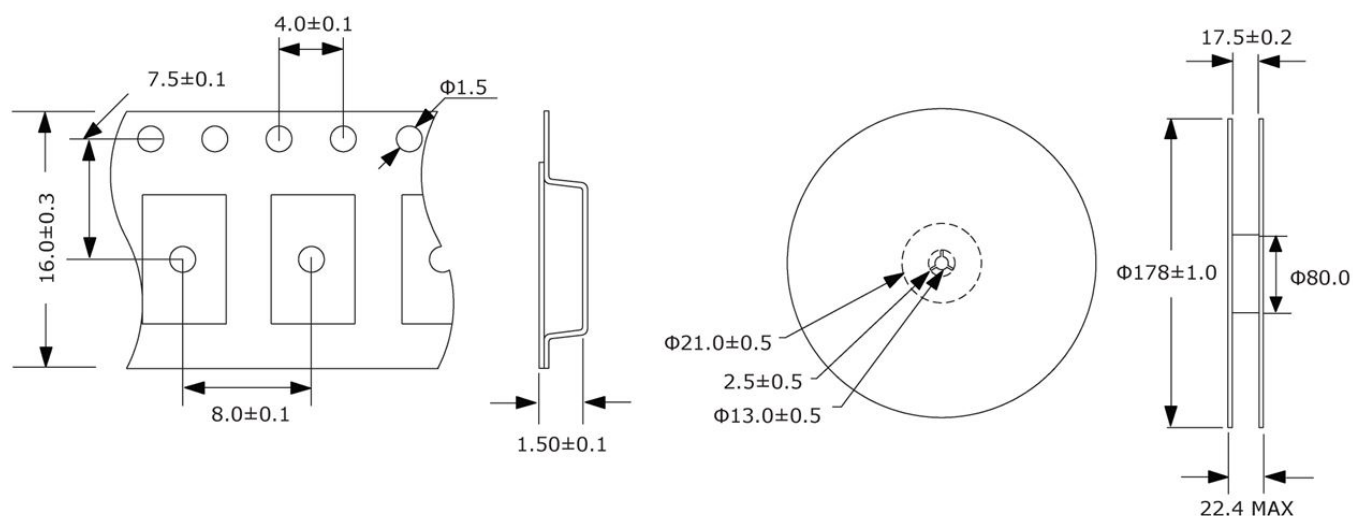

www.suntsu.com

Specifications are subject
to change without notice.

Suntsu Electronics, Inc.
 142 TECHNOLOGY DR., SUITE 150
 IRVINE, CA 92618

Call: +1-949-783-7300 | Fax: +1-949-783-7301