


# SCNR6020

## SMD POWER INDUCTORS

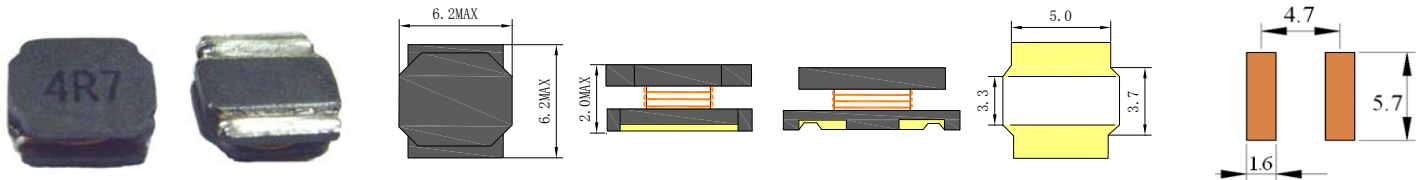



● Features

1. Open frame construction.



## ELECTRICAL CHARACTERISTICS

Part Number	Inductance (uH) (1)	Test Frequency	DC Resistance ( $\Omega$ MAX) (2)	Saturation Current <sup>(3)</sup> (A)	Temperature Current <sup>(4)</sup> (A)
SCNR6020-0R8	0.8	100KHZ	26.0	5.50	3.90
SCNR6020-1R5	1.5	100KHZ	33.8	4.00	3.20
SCNR6020-2R2	2.2	100KHZ	44.2	3.20	2.80
SCNR6020-3R3	3.3	100KHZ	52.0	2.80	2.35
SCNR6020-4R7	4.7	100KHZ	75.4	2.40	1.85
SCNR6020-6R8	6.8	100KHZ	110.5	2.00	1.60
SCNR6020-100	10	100KHZ	150.0	1.70	1.30
SCNR6020-220	22	100KHZ	348.0	1.05	0.90

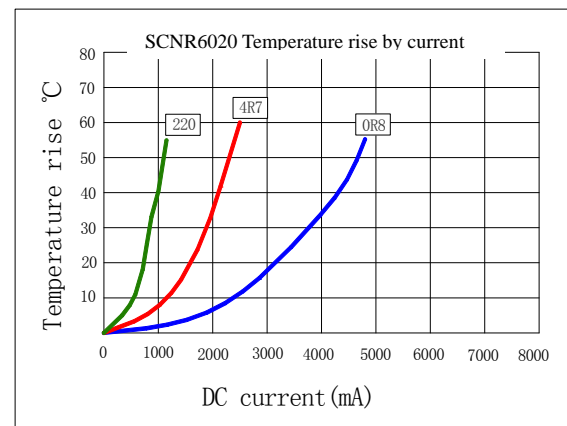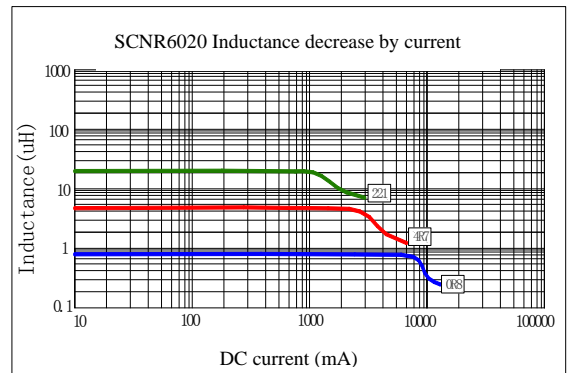

- (1). Inductance tested at 0.25V, 0ADC and 25°C.  
Tolerance of inductance: 0.8uH-6.8uH:  $\pm 30\%$  (N).  
10uH-22uH:  $\pm 20\%$  (M).
- (2).DCR measured at 25°C.
- (3).The DC current at which the inductance decreases by 30% from its initial value.
- (4).The DC current that results in a 40°C temperature rise from 25°C ambient.

[Click here for QUANTITY PER REEL & PACKING INFORMATION](#)

**Custom versions available upon request.**

© 2019 Signal Transformer –Specification subject to change without notice. 12.19

