120-103
Series 74 Helical Convoluted Tubing (MIL-T-81914)
Natural or Black PFA, FEP, PTFE, Tefzel® (ETFE) or PEEK
Type B - With External Black Dacron® Braid

MIL-T-89194 helical convoluted tubing with external black Dacron® braid

How To Order


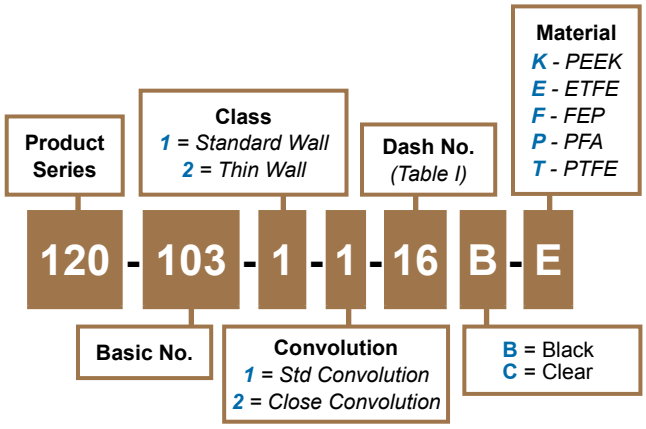


Table I				
Dash No.	Frac. Size	Ø A Inside Min	Ø A Inside Max	Ø B Max
06	3/16	.181	.188	.430 (10.9)
09	9/32	.273	.281	.474 (12.0)
10	5/16	.306	.312	.510 (10.2)
12	3/8	.359	.375	.571 (14.5)
14	7/16	.427	.437	.631 (16.0)
16	1/2	.480	.500	.710 (18.0)
20	5/8	.603	.625	.830 (21.1)
24	3/4	.725	.750	.990 (25.1)
28	7/8	.860	.875	1.133 (28.7)
32	1	.970	1.000	1.286 (32.8)
40	1 1/4	1.205	1.250	1.599 (40.6)
48	1 1/2	1.437	1.500	1.892 (48.0)
56	1 3/4	1.688	1.750	2.192 (55.6)
64	2	1.937	2.000	2.442 (62.0)

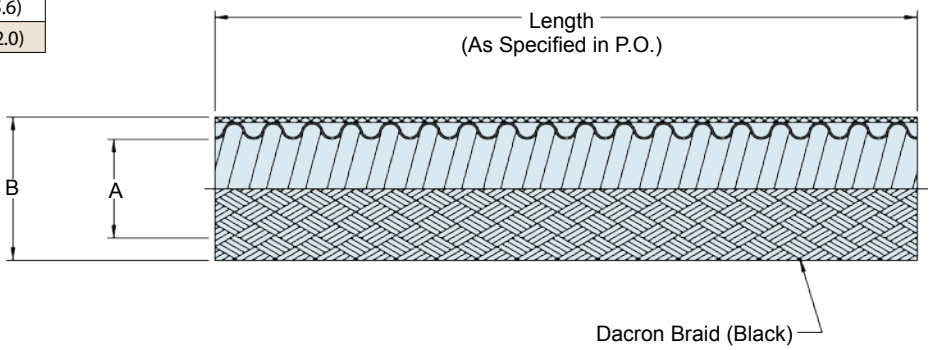

Material and Finish
Convoluted Tubing: See Table II
Dacron Braid: Black, per Federal Specification BT 285D

Notes
Packages and spools identified with manufacturer's name and part number.
Unless otherwise specified, Conduit will be shipped per standard package minimum length supplied will be 10 feet (3M).
Consult factory for PTFE sizes not shown.

© 2012 Glenair, Inc. U.S. CAGE Code 06324 Printed in U.S.A.