


SIL10E Series

3.0 Vin - 5.5 Vin

Total Power: 49.9 Watts
Input Voltage: 3.0-5.5 Vdc
of Outputs: Single

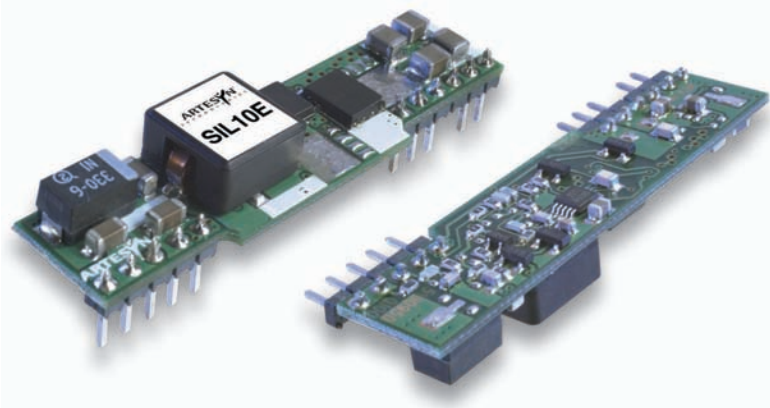

Special Features

- 10 A Current rating
- Input voltage range: 3 Vdc to 5.5 Vdc
- Output voltage range: 0.8 Vdc to 3.63 Vdc
- Ultra high efficiency: 96% @ 5 Vin and 3.3 Vout
- Extremely low internal power dissipation
- Minimal thermal design concerns
- Designed in reliability: MTBF of 7,000,000 hours per Telcordia SR-332
- Ideal solution where board space is at a premium or tighter card pitch is required
- Industry standard footprint and pin out
- Available RoHS compliant
- 2 year warranty

Safety

- UL/cUL CAN/CSA 22.2 No. 60950-1-03/UL 60950-1, File No. E186249
- TÜV Product Service (EN60950) Certificate No. B 08 05 51485 378
- CB report and certificate to IEC60950, Certificate No. DE3-51686M1

Electrical Specifications

| Input | | |
|-------------------------------------|---|---|
| Input voltage range: | | 3.0-5.5 Vdc |
| Input current: | No load | 70 mA |
| Input current (max.): | | 8 A max. @ Io max. and Vout = 3.3 V |
| Input reflected ripple: | | 65 mA rms |
| Remote ON/OFF: | | (See Note 2) |
| Start-up time: | | 20 ms |
| Output | | |
| Voltage adjustability: (See Note 1) | Fixed output versions 5 Vin with wide trim 3.3 Vin with wide trim | ±10% 0.8 - 3.63 Vdc 0.8 - 2.75 Vdc |
| Setpoint accuracy: | | ±0.4% typ. |
| Line regulation: | | ±0.2% typ. |
| Load regulation: | | ±1.0% typ. |
| Minimum load: | | 0 A |
| Overshoot/Undershoot: | | None |
| Ripple and noise: | | 50 mV pk-pk 25 mV rms max. |
| Temperature co-efficient: | | ±0.01%/°C |
| Transient response: | | 50 mV max. deviation 50µs recovery to within ±1.0% |
| Remote sense: | | 10% Vo compensation |

All specifications are typical at nominal input, full load at 25 °C unless otherwise stated.



EMC Characteristics

| | |
|--------------------------|-----------------------|
| Electrostatic discharge: | EN61000-4-2, IEC801-2 |
| Conducted immunity: | EN61000-4-6 |
| Radiated immunity: | EN61000-4-3 |

General Specifications

| | | |
|--------------------------|-----------------------------------|---|
| Efficiency: | | See table |
| Insulation voltage: | | Non-isolated |
| Switching frequency: | Fixed | 300 kHz typ. |
| Approvals and standards: | | EN60950 UL/cUL60950 |
| Material flammability: | | UL94V-0 |
| Dimensions | (L x W x H) | 50.8 x 7.8 x 12.7 mm 2.0 x 0.31 x 0.5 inches |
| Pin length: | (Vertical) | 0.135 ± 0.02 in (3.43 ± 0.5 mm) |
| Weight: | | 5 g (0.18 oz) |
| MTBF: | Telcordia SR-332 MIL-HDBK-217F | 7,042,000 hours 680,000 hours |

Environmental Specifications

| | | |
|--------------------------------------|-------------------------------|-------------------|
| Thermal performance: (See Note 3) | Operating ambient temperature | -40° C to +100 °C |
| | Non-operating | -40 °C to +125 °C |

Protection


| | |
|----------------|--------------------|
| Short circuit: | Continuous |
| Thermal: | Automatic recovery |

Ordering Information

All specifications are typical at nominal input, full load at 25 °C unless otherwise stated.

| Ordering Information | | | | | | | | |
|----------------------|---------------|----------------|-----------------|------|-------------------|------------|-------|------------------------------------|
| Output Power (Max.) | Input Voltage | Output Voltage | Output Currents | | Efficiency (typ.) | Regulation | | Model Numbers ^(4, 5, 6) |
| | | | Min | Max | | Line | Load | |
| 8.8 W | 3.0 - 5.5 Vdc | 0.8 V | 0 A | 10 A | 83% | ±0.2% | ±1.5% | SIL10E-05S0V8-VJ (EOL) |
| 11 W | 3.0 - 5.5 Vdc | 1 V | 0 A | 10 A | 86% | ±0.2% | ±1.5% | SIL10E-05S1V0-VJ (EOL) |
| 13.2 W | 3.0 - 5.5 Vdc | 1.2 V | 0 A | 10 A | 88% | ±0.2% | ±1.0% | SIL10E-05S1V2-VJ (EOL) |
| 16.5 W | 3.0 - 5.5 Vdc | 1.5 V | 0 A | 10 A | 90% | ±0.2% | ±1.0% | SIL10E-05S1V5-VJ (EOL) |
| 19.8 W | 3.0 - 5.5 Vdc | 1.8 V | 0 A | 10 A | 92% | ±0.2% | ±1.0% | SIL10E-05S1V8-VJ (EOL) |
| 22 W | 3.0 - 5.5 Vdc | 2 V | 0 A | 10 A | 93% | ±0.2% | ±1.0% | SIL10E-05S2V0-VJ (EOL) |
| 27.5 W | 3.0 - 5.5 Vdc | 2.5 V | 0 A | 10 A | 94% | ±0.2% | ±1.0% | SIL10E-05S2V5-VJ (EOL) |
| 36.3 W | 4.5 - 5.5 Vdc | 3.3 V | 0 A | 10 A | 95% | ±0.2% | ±1.0% | SIL10E-05S3V3-VJ (EOL) |
| 36.3 W | 4.5 - 5.5 Vdc | 0.8 - 3.63 V | 0 A | 10 A | 95% | ±0.2% | ±1.0% | SIL10E-05W3V3-VJ |

Part Number System with Options

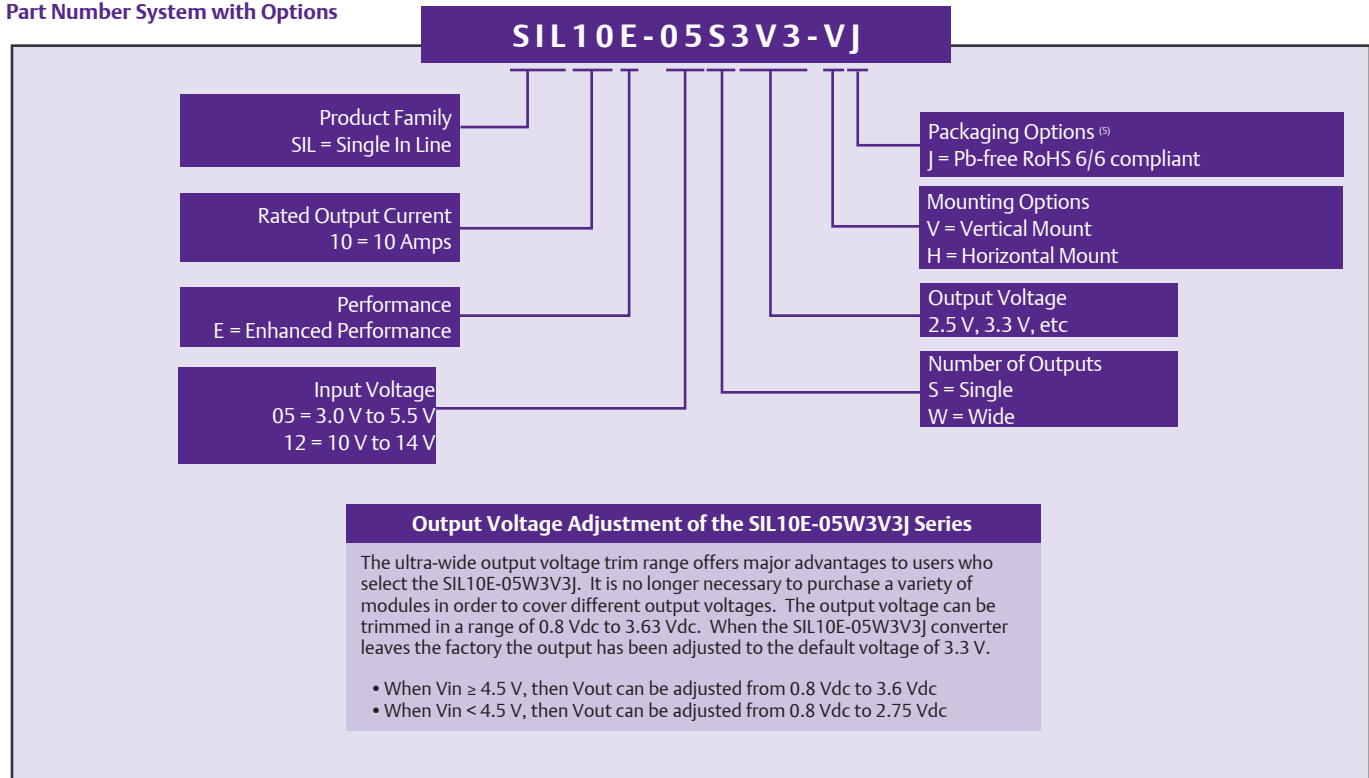

Notes

- 1 When $V_{in} \geq 4.5$ V, then V_{out} can be adjusted from 0.8 V to 3.6 V. When $V_{in} < 4.5$ V, then V_{out} can be adjusted from 0.8 V to 2.75 V.
- 2 The SIL10E features a 'Negative Logic' Remote ON/OFF operation. If you are not using the Remote ON/OFF pin, leave the pin open (the converter will be on). The Remote ON/OFF pin is referenced to ground.

The following conditions apply for the SIL10E:

Configuration

- Remote pin open circuit
- Remote pin pulled low
- Remote pin pulled high [$V_{on/off} > 1.2$ V]

Converter Operation

- Unit is ON
- Unit is ON
- Unit is OFF

Notes Continued

- 3 Full derating curves available in both the Longform Datasheet and Application Note 136.
- 4 For certain applications that use low ESR capacitors on the output of the convertor and to insure maximum converter stability, please add the suffix '02' to the model, e.g. SIL10E-05S2V5-V02J.
- 5 TSE RoHS 5/6 (non Pb-free) compliant versions may be available on special request, please contact your local sales representative for details.
- 6 NOTICE: Some models do not support all options. Please contact your local Emerson Network Power representative or use the on-line model number search tool at <http://www.PowerConversion.com> to find a suitable alternative.

Mechanical Drawings

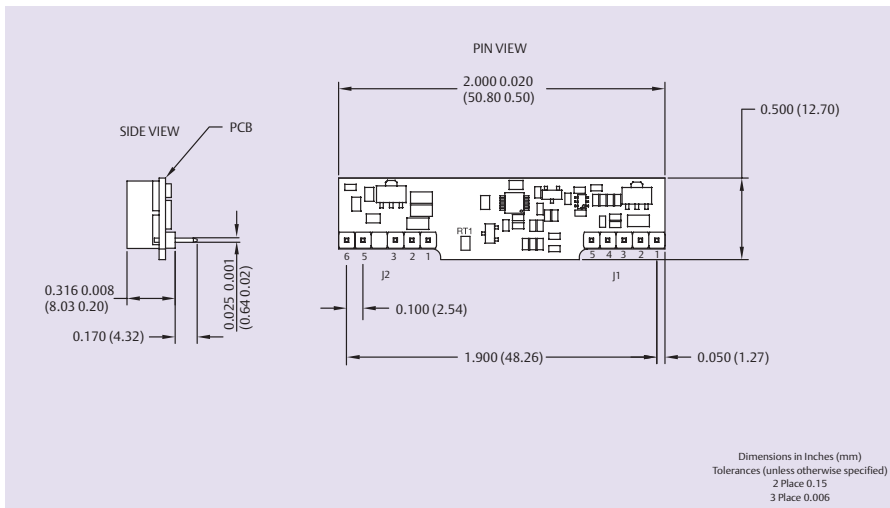


Figure 1: Horizontal Mount Version

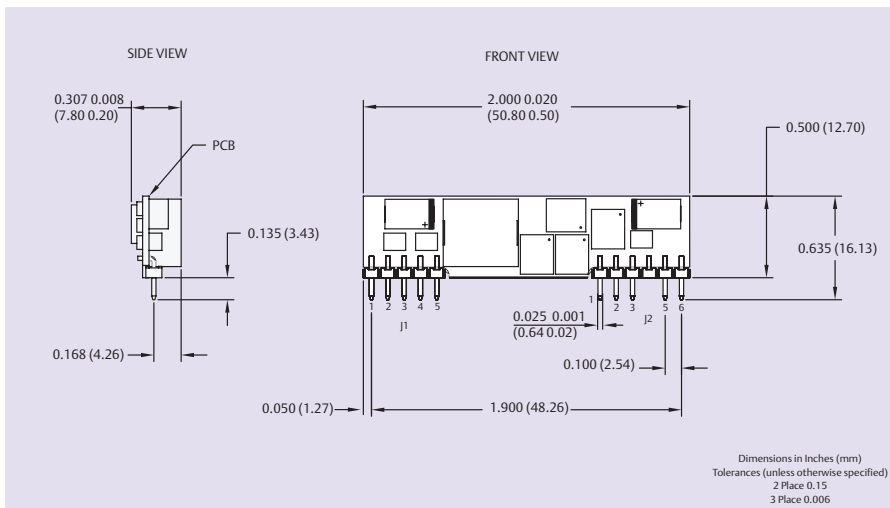


Figure 2: Vertical Mount Version

| Input Pin Connections | |
|-----------------------|------------------|
| J1 | |
| Pin 1 | +Vout |
| Pin 2 | +Vout |
| Pin 3 | Remote Sense (+) |
| Pin 4 | +Vout |
| Pin 5 | Ground |

| Input Pin Connections | |
|-----------------------|---------------|
| J2 | |
| Pin 1 | Ground |
| Pin 2 | +Vin |
| Pin 3 | +Vin |
| Pin 4 | No Pin |
| Pin 5 | Trim |
| Pin 6 | Remote ON/OFF |

Americas

5810 Van Allen Way
Carlsbad, CA 92008
USA
Telephone: +1 760 930 4600
Facsimile: +1 760 930 0698

Europe (UK)

Waterfront Business Park
Merry Hill, Dudley
West Midlands, DY5 1LX
United Kingdom
Telephone: +44 (0) 1384 842 211
Facsimile: +44 (0) 1384 843 355

Asia (HK)

14/F, Lu Plaza
2 Wing Yip Street
Kwun Tong, Kowloon
Hong Kong
Telephone: +852 2176 3333
Facsimile: +852 2176 3888

For global contact, visit:

www.PowerConversion.com
techsupport.embeddedpower@emerson.com

While every precaution has been taken to ensure accuracy and completeness in this literature, Emerson Network Power assumes no responsibility, and disclaims all liability for damages resulting from use of this information or for any errors or omissions.

Emerson Network Power.
The global leader in enabling
business-critical continuity.

- AC Power
- Connectivity
- DC Power
- Embedded Computing
- Embedded Power
- Monitoring
- Outside Plant
- Power Switching & Controls
- Precision Cooling
- Racks & Integrated Cabinets
- Services
- Surge Protection

EmersonNetworkPower.com

Emerson Network Power and the Emerson Network Power logo are trademarks and service marks of Emerson Electric Co.
©2008 Emerson Electric Co.