
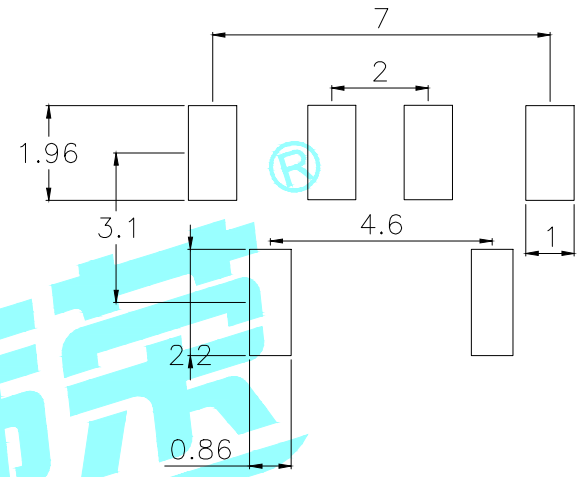




ROHS

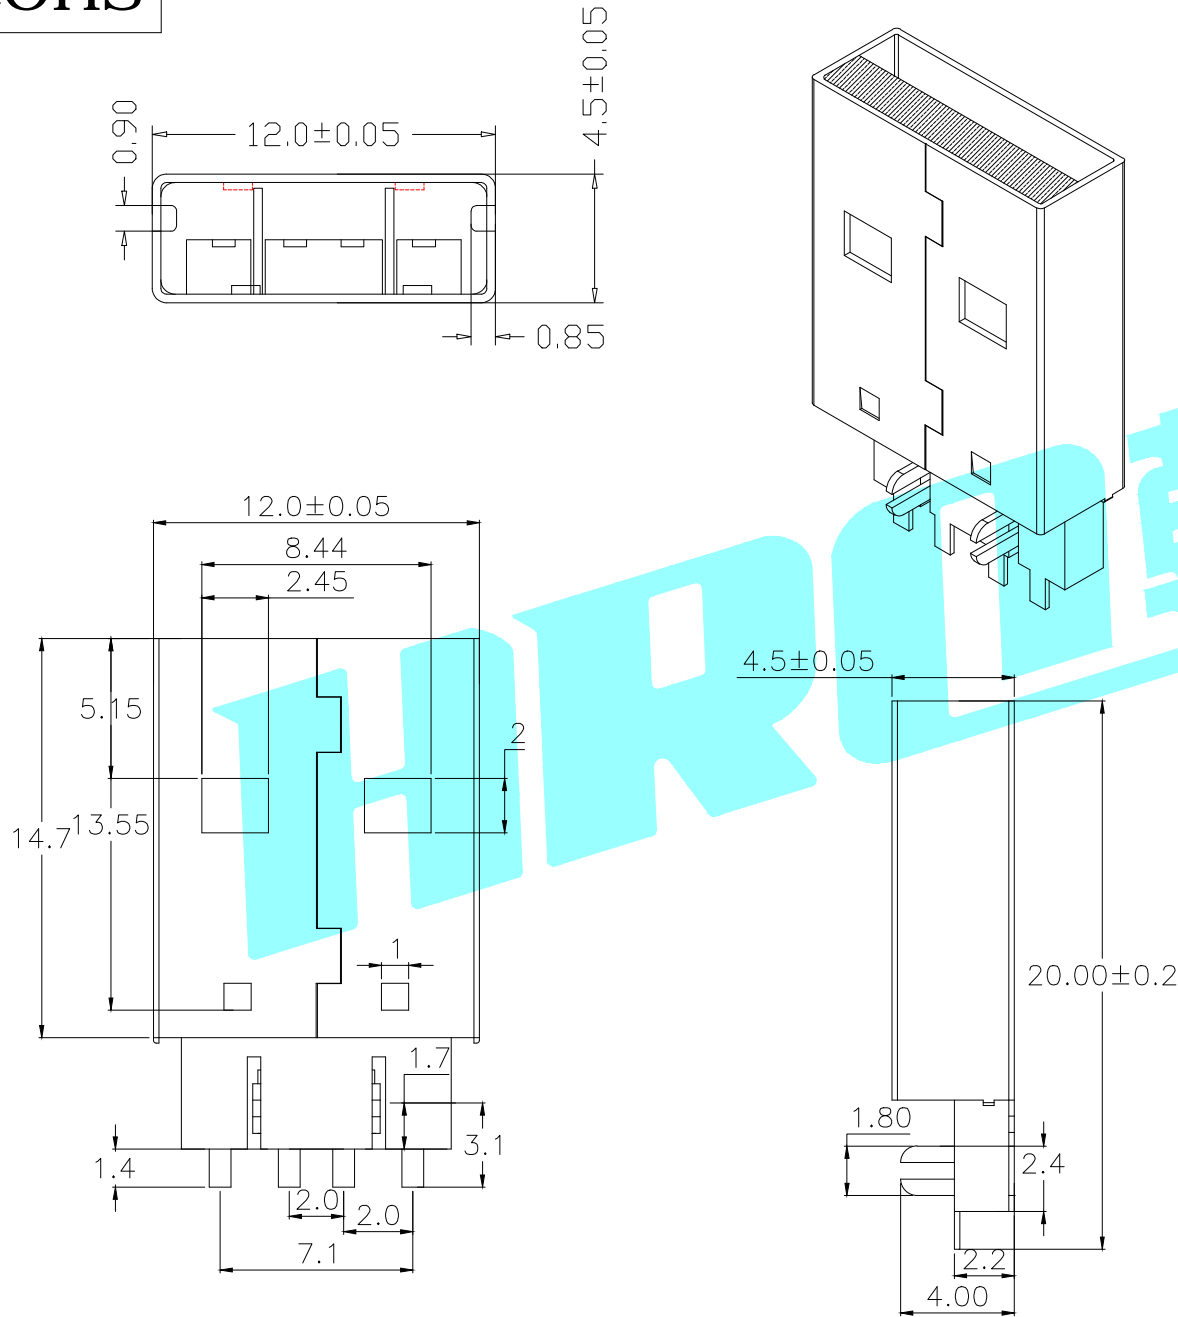

PART NO.	
U-G-04WS-W-05	U-G-04WS-W-06
Housing Black	Housing White

NOTE:

- 1.MATERIAL:
 - a.HOUSING:PBT GLASS FIBRE UL94V-0;
 - b.CONTACT: BRASS T=0.25mm
(SURFACE PLATING: Au1u"+Sn80-100u"+Ni60u")
 - c.SHEEL:SPCC-SD-DILED.T=0.3mm
(SURFACE PLATING: Cu50-80u"; Ni50-80u";
- 2.ELECTRIC:
 - a.CONTACT RESISTANCE: 30 MILLIOHMS MAX
 - b.INSULATION RESISTANCE: 1000 MEGA OHMS MIN
 - c.DIELECTNIC VOLTAGE: 500V AC ONE MIN LEVEL
 - d.OPERATING TEMPERATURE: -55'-85'
- 3.MANUAL WELDING IS REQUIRED: ≤350°C
≤3 SECONDS

APPROVALS		DATE		 ELECTRONICS CO.,LTD					
DRAWN	D.J.LV	2018/1/12					TITLE:	USB 2.0 公头	
CHECKED				PART NO.					
APPROVALS				TOLERANCES ARE	30~以上 ±0.30 10~30 ±0.20 5~10 ±0.15 ~ 5 ±0.10				
		ANGLE	±2'	UNIT: mm	SCALE: 1:1				
ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.	DRAWING NO.	PROJ: 	SHEET 1 OF 1

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			