

3.3Vdc CMOS COMPATIBLE SMD CRYSTAL CLOCK OSCILLATOR



3.2 X 2.5 X 1.1mm

ASE SERIES



RoHS
Compliant

FEATURES:

- Compact and low in height
- Low current consumption
- Tri state function
- Suitable for high density SMT
- IR reflow capable
- Tight stability option

APPLICATIONS:

- CCD clock for VTR camera
- Equipment connected to PC or PC cards
- Thin equipment

STANDARD SPECIFICATIONS:

PARAMETERS

ABRACON P/N	ASE Series
Frequency Range	0.75 ~ 75 MHz
Operating Temperature	-20°C to + 70°C (See Options)
Storage Temperature	-55°C to + 100°C
Overall Frequency Stability	± 100 ppm max. (See Options)
Supply Voltage (Vdd)	3.3 V ± 5%
Input Current	See Table 1
Symmetry	45/55% @ 50%Vdd
Rise and Fall Time (Tr/Tf)	See Table 1
Output Load	15 pF (max) or 10 TTL loads
Output Voltage	VOH = 0.9* Vdd min. VOL = 0.1* Vdd max.
Tristate Function	"1" (VIH >= 2.2 Vdc) or open: Oscillation "0" (VIL < 0.8 Vdc) : Hi Z
Peak to Peak Jitter	28ps (Typical)
RMS Jitter	3.6ps (Typical)

TABLE 1 - Input Current

Freq. (MHz)	Idd max. (max. mA)	Tr/Tf max (nSec)
~ 20 MHz	7	10 max.
~ 40 MHz	13	10 max.
~ 60 MHz	19	10 max.
~ 75 MHz	24	10 max.

OPTIONS & PART IDENTIFICATION:

[Left blank if standard]

ASE - Frequency - □ - □ - □

Operating Temp. Range	
I	0°C to +50°C
D	-10°C to +60°C
E	-20°C to +70°C
F	-30°C to +70°C
N	-30°C to +85°C
L	-40°C to +85°C

Contact ABRACON for wider temperature range.

Overall Frequency Stability	
Y(*)	±10ppm
J(**)	±20ppm
R	±25ppm
K	±30ppm
H	±35ppm
B	±40ppm
C	±50ppm

* Available for 0°C to +50°C and -10°C to +60°C only.

** Contact ABRACON for -40°C to +85°C.

Packaging	
T	Tape and Reel



3.3Vdc CMOS COMPATIBLE SMD CRYSTAL CLOCK OSCILLATOR




3.2 X 2.5 X 1.1mm

ASE SERIES



OUTLINE DRAWING:

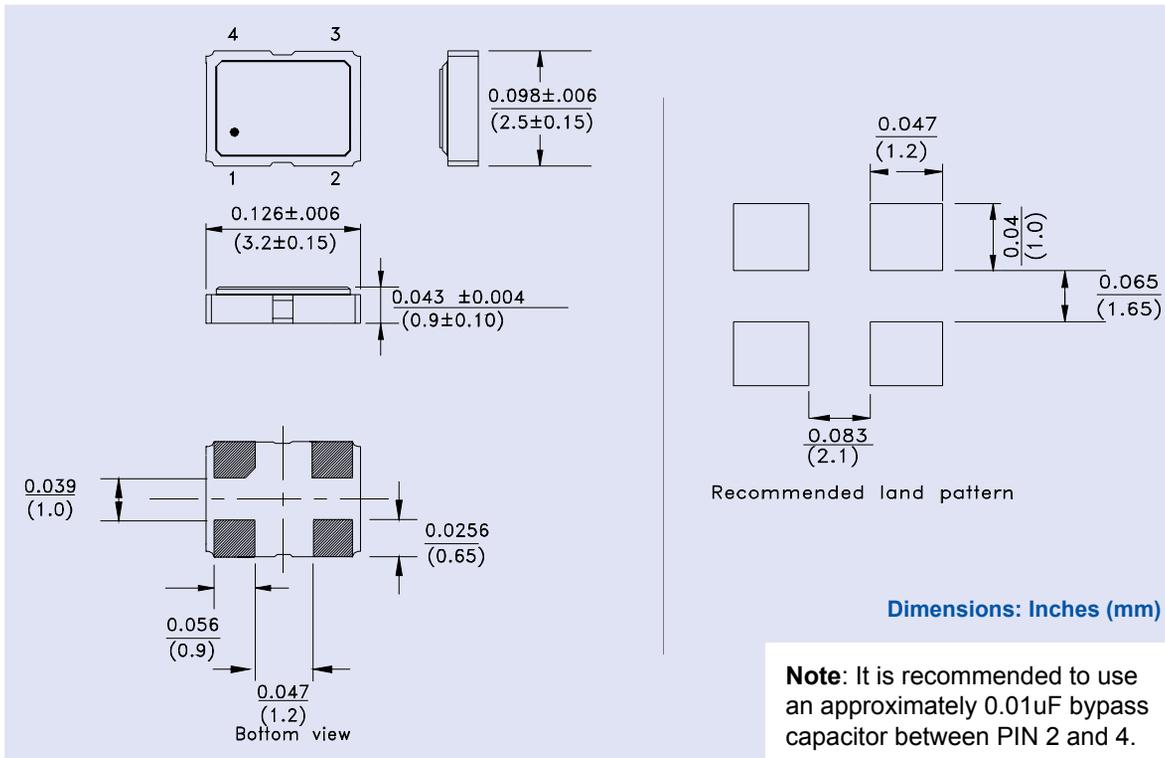

PIN	FUNCTION
1	Tri-state
2	GND/Case
3	Output
4	Vdd

TAPE & REEL:

