


HCMOS 14 pin DIL, kHz Range

- Package 14 pin DIL, with trimmer
- Frequency range: 20.0 to 50.0kHz; 32.768kHz
- Supply voltage 3.3 or 5.0 Volts
- Frequency stability from ± 1 ppm over -30 to $+75^\circ\text{C}$
- RoHS compliant



DESCRIPTION

EM15GT series TCXOs are packaged in a miniature 6 pad ceramic SMD package. With squarewave (CMOS) output, tolerances are available from ± 1.0 ppm over -30° to $+75^\circ\text{C}$. The part has a $0.01\mu\text{F}$ decoupling capacitor built in.

SPECIFICATION

Product Series Code	TCXO:	EM15GT
	VCTCXO:	VEM15GT
Frequency Range:	32.768kHz Standard frequency 20.0kHz to 50.0kHz	
Output Waveform:	Squarewave	
Initial Calibration Tolerance		
	Models with mech. trimmer:	< 1.0 ppm (at t. $25^\circ \pm 2^\circ\text{C}$)
	Models without trimmer:	< 2.0 ppm (at t. $25^\circ \pm 2^\circ\text{C}$)
Operating Temperature Range:	See table	
Frequency Stability		
	vs. Ageing:	± 1.0 ppm max. first year
	vs. Voltage Change:	± 0.3 ppm max. $\pm 5\%$ change
	vs. Load Change:	± 0.3 ppm max. $\pm 10\%$ change
	vs. Reflow:	± 1 ppm max. for one reflow (Measured after 24 hours)
Supply Voltage:	$+3.3$ or $+5.0$ Volts (Specify when ordering)	
Output Logic Levels:	Logic High: 90% Vdd min. Logic Low: 10% Vdd max.	
Rise and Fall Times:	10ns max.	
Duty Cycle:	$50\% \pm 5\%$	
Start-up Time:	2ms typical, 5ms max.	
Current Consumption:	See table below	
Output Load:	15pF	
Storage Temperature:	$-55 \sim +125^\circ\text{C}$	

FREQUENCY STABILITY


Frequency Stability (ppm)		± 0.5	± 1.0	± 1.5	± 2.0	± 2.5
Temperature Range ($^\circ\text{C}$)	0 ~ +50	ASK	✓	✓	✓	✓
	-10 ~ +60	x	✓	✓	✓	✓
	-20 ~ +70	x	x	✓	✓	✓
	-30 ~ +75	x	x	x	✓	✓
	-40 ~ +85	x	x	x	x	✓

✓ = available, x = not available, ASK = call Technical Sales

CURRENT CONSUMPTION

Frequency	+3.3 V
32.768kHz	8.0mA
50kHz	12mA

EM15GT - OUTLINES AND DIMENSIONS

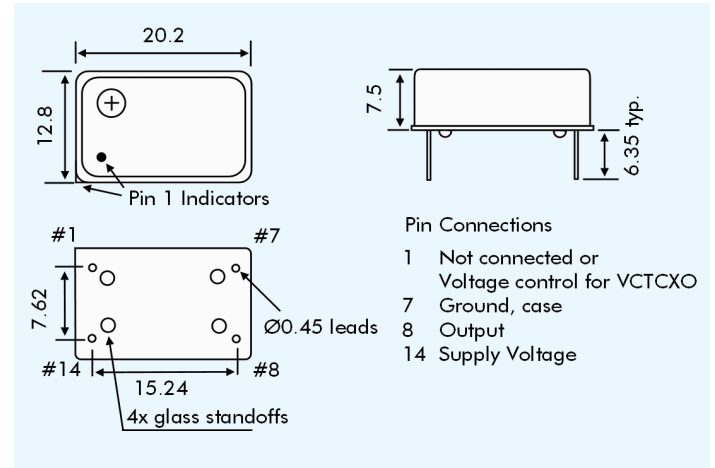

VEM15GT VOLTAGE CONTROL SPECIFICATION

Control Voltage:	Standard = $+1.5 \pm 1.0$ Volts for all input voltages. (Contact technical sales if $+2.5 \pm 2.0$ Volts is required.)
Frequency Deviation:	± 6.0 ppm min.
Slope Polarity:	Positive (increase of control voltage increases output frequency.)
Input Impedance:	10k Ω min.
Modulation Bandwidth:	3.0kHz min. measured at -3dB
Linearity:	10% max.

PART NUMBERING PROCEDURE

Example: **EM15GT33-32.768k-2.5/-30+75**

Series Description
 TCXO = EM15GT
 VCTCXO = VEM15GT
 Supply Voltage
 33 = 3.3 VDC
 5 = 5.0 VDC
 Frequency (kHz)
 Stability over OTR (\pm ppm)
 Operating Temperature Range (OTR) ($^\circ\text{C}$)
 Lower and upper limits.