

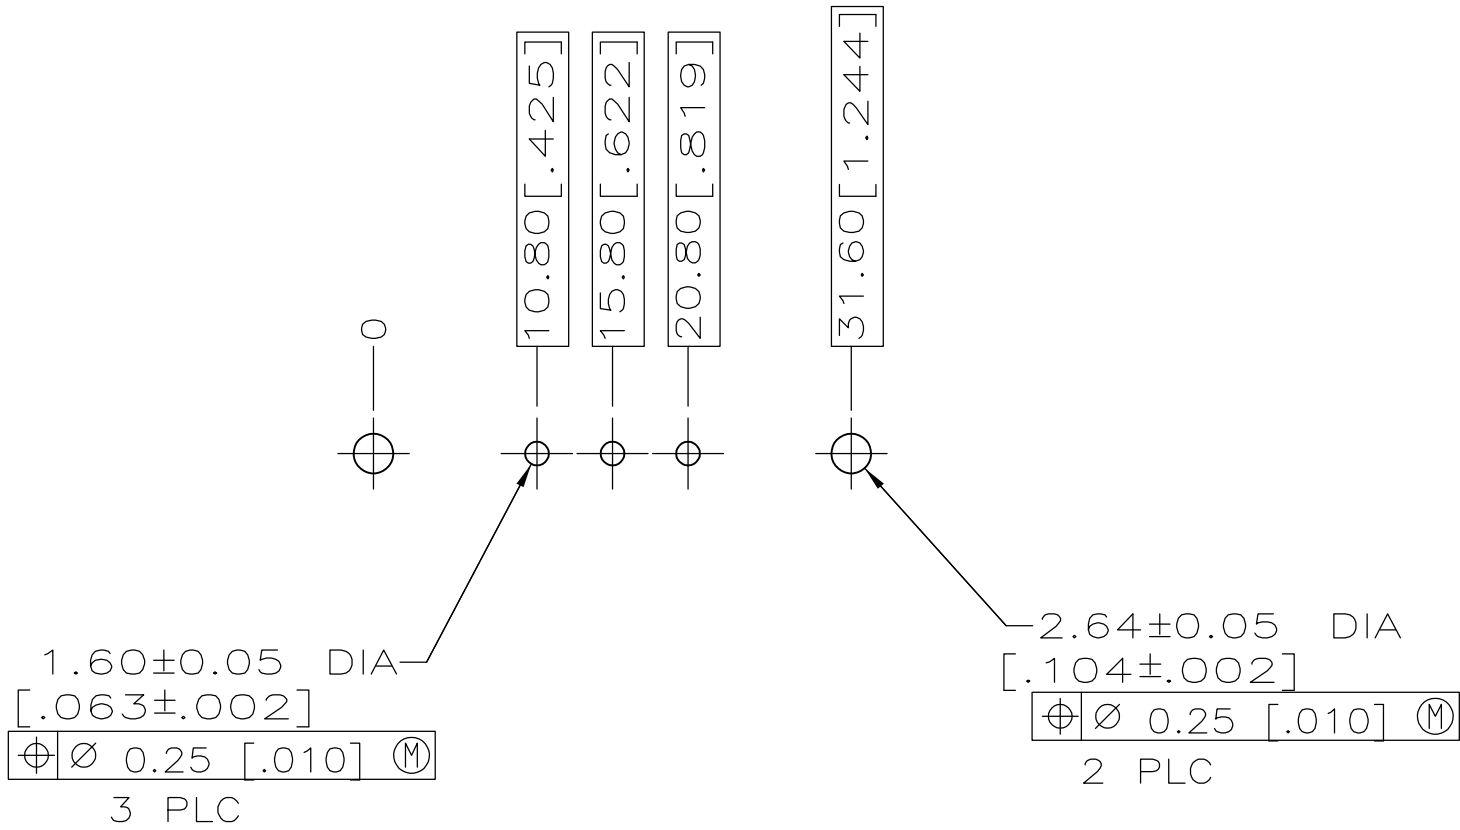
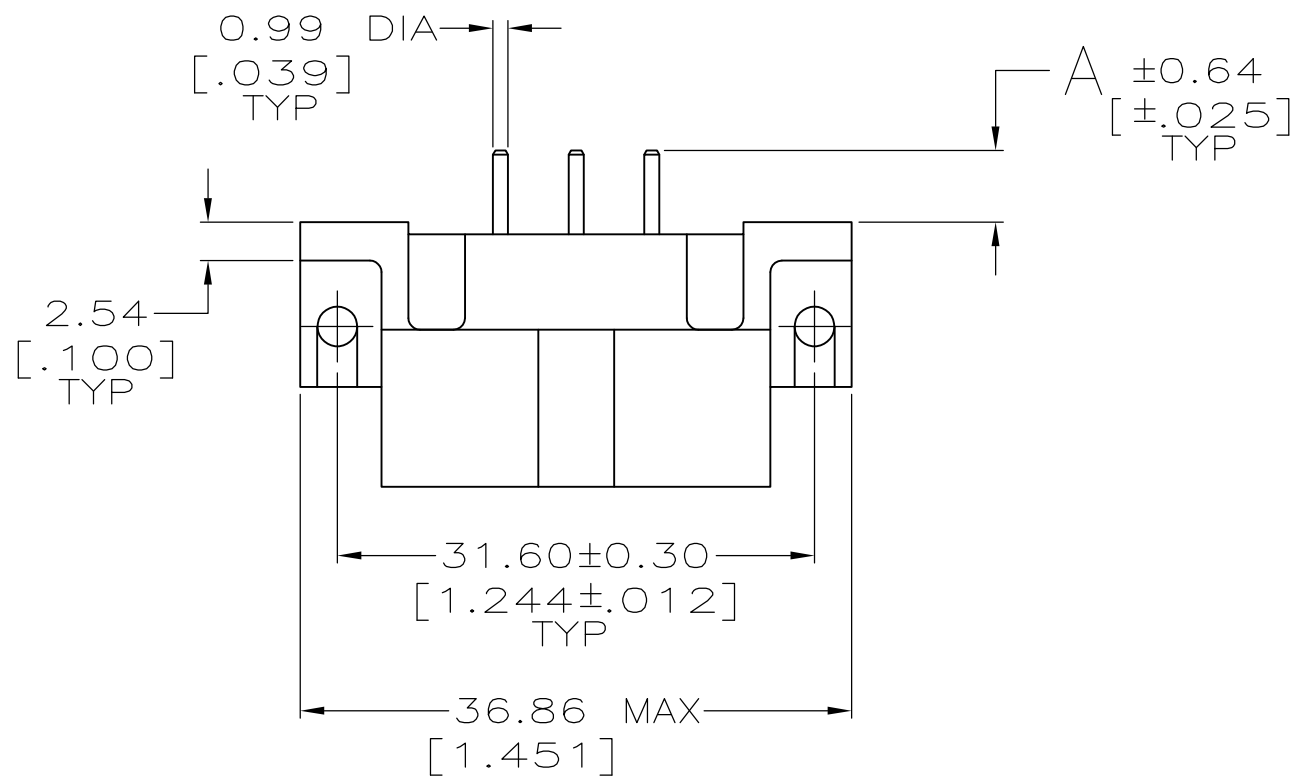


LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
FT	0		L1	REVISED PER ECO-08-029974	03DEC08	HMR	GS
			L2	REVISED PER ECO-10-000443	13JAN10	KK	AEG

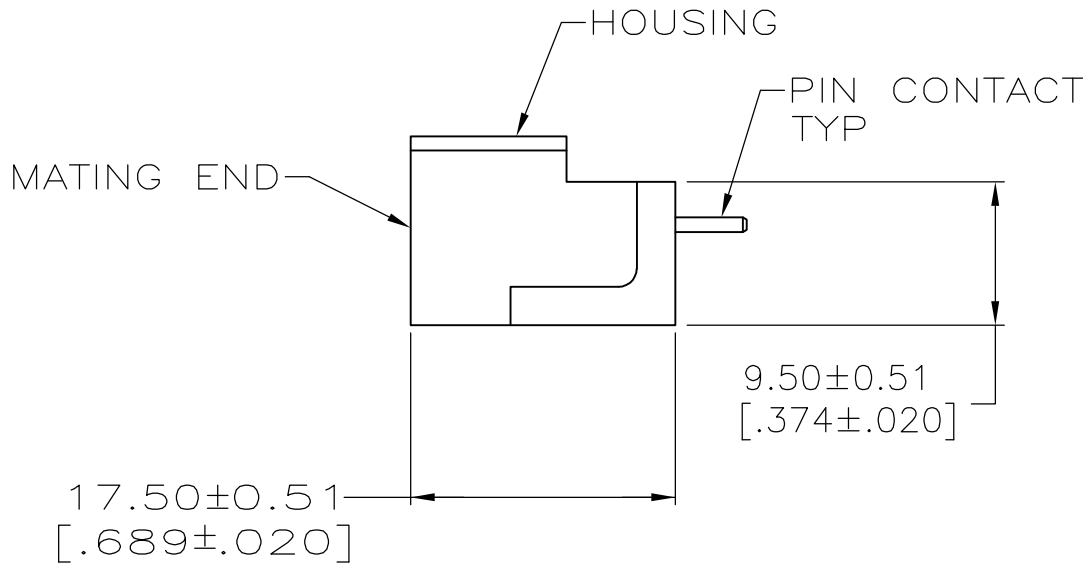

RECOMMENDED PC BOARD LAYOUT

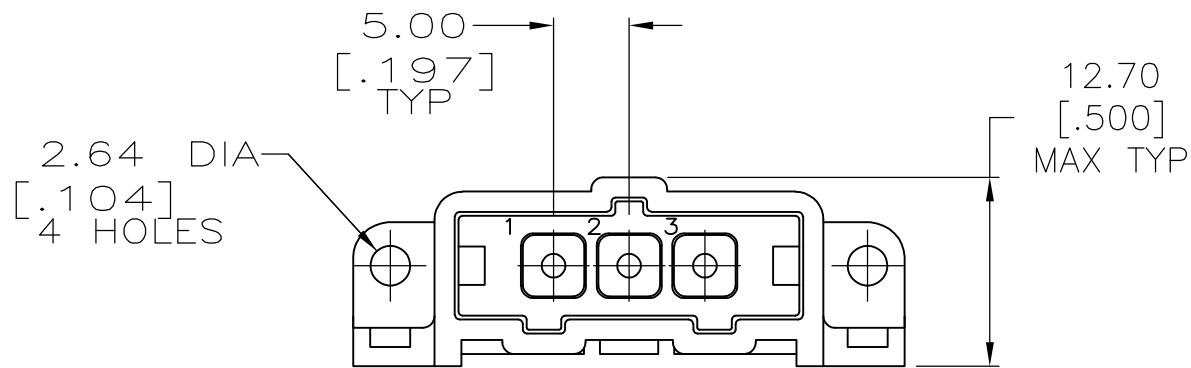

- 1 NYLON, RED.
- 2 BRASS PER ASTM B36.
- 3 3.81um [.000150] MIN TIN-LEAD OVER 2.54um [.000100] MIN COPPER OR 1.27um [.000050] MIN NICKEL.
- 4 0.76um [.000030] MIN GOLD FOR A LENGTH OF 5.08 [.200] MIN FROM MATING END 3.81um [.000150] MIN TIN-LEAD FOR A LENGTH OF 5.36 [.211] MIN FROM OPPOSITE END, BOTH OVER 1.27um [.000050] MIN NICKEL.
- 5 .000150 MIN TIN OVER .000100 MIN CU, OR .000050 MIN NICKEL.
- 6 0.76um [.000030] MIN GOLD FOR A LENGTH OF 5.08 [.200] MIN FROM MATING END 3.81um [.000150] MIN TIN FOR A LENGTH OF 5.36 [.211] MIN FROM OPPOSITE END, BOTH OVER 1.27um [.000050] MIN NICKEL.
- 7 PRELIMINARY PART NUMBER.
- 8 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

8	7	3.50 [.137]	6	1-207365-0
	OBSOLETE	7.52 [.296]	6	207365-9-
		4.72 [.186]	6	207365-8
		4.72 [.186]	5	207365-7
		7.52 [.296]	4	207365-6
		4.72 [.186]	4	207365-3
		4.72 [.186]	3	207365-1
		A	FINISH	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	L.SIPE		07/20/92		 Tyco Electronics Corporation Harrisburg, Pa 17105-3608							
DIMENSIONS: mm [INCHES]		CHK	R.STONE		7-24-92		NAME PIN HEADER ASSEMBLY, 3 POSN, IN-LINE, SMALL METRIC CONNECTOR, METRIMATE							
		APVD	A.TRAVIS		7-24-92									
		PRODUCT SPEC		—										
		APPLICATION SPEC		—										
MATERIAL		TOLERANCES UNLESS OTHERWISE SPECIFIED:		WEIGHT		—		SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO			
HOUSING:  CONTACTS: 		FINISH		—		A2		00779	C-207365		—			
CONTACTS: SEE TABLE				CUSTOMER DRAWING				SCALE	2:1		SHEET	1 of 1	REV	L2