

Surface Mount Frequency Mixer

Level 4 (LO Power +4 dBm) 1200 to 2400 MHz

MBA-15L+
MBA-15L



CASE STYLE: SM2

Maximum Ratings

Operating Temperature -40°C to 85°C

Storage Temperature -55°C to 100°C

RF Power 50mW


IF Current 40mA

Permanent damage may occur if any of these limits are exceeded.


Pin Connections

LO	10
RF	5
IF	3
GROUND	1,2,4,6,7,8,9

Outline Drawing

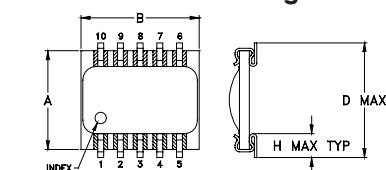

PCB Land Pattern




Suggested Layout,
Tolerance to be within ±0.002
ADJACENT GROUND PINS SHALL BE CONNECTED
TO EACH OTHER AND TO GROUND PAD

Outline Dimensions (inch)

A	B	C	D	E	F	G	H	I	J	K	L	M	N	P	Q	R	S	T	U	V	W	X	Y	Z
.250	.300	.095	.290	.050	.015	.050	.060																	
6.35	7.62	2.41	7.37	1.27	0.38	1.27	1.52																	
.030	.080	.300	.100	.020	.015	.070	.014																	
0.76	2.03	7.62	2.54	0.51	0.38	1.78	0.36																	

Demo Board MCL P/N: TB-99 Suggested PCB Layout (PL-066)

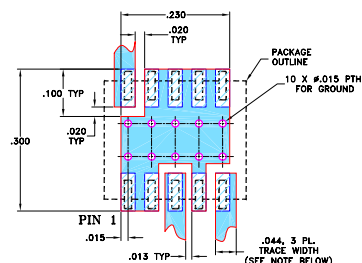

- NOTES: 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS 0.020" ± 0.0015". COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
3. DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
4. DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

Features

- excellent temperature stability
- excellent performance repeatability
- leads with strain relief
- very low cost
- ultra low height, 0.07"
- aqueous washable
- protected by US Patent 5,534,830

Applications

- wireless local loop
- PCN/PCS/wideband CDMA
- WLAN
- satellite communication
- ISM band
- PCMCIA

Electrical Specifications


FREQUENCY (MHz)		CONVERSION LOSS (dB)			LO-RF ISOLATION (dB)		LO-IF ISOLATION (dB)		IP3 at center band (dBm)
LO/RF	IF	\bar{X}	σ	Max.	Typ.	Min.	Typ.	Min.	
1200-2400	DC-600	6.5	0.1	8.5	27	15	20	10	10

1 dB COMP.: 0 dBm typ.

Typical Performance Data

Frequency (MHz)		Conversion Loss (dB)	Isolation L-R (dB)	Isolation L-I (dB)	VSWR RF Port (:1)	VSWR LO Port (:1)
RF	LO	LO +4dBm	LO +4dBm	LO +4dBm	LO +4dBm	LO +4dBm
1200.00	1230.00	7.05	30.80	13.30	3.79	3.71
1250.00	1280.00	7.08	30.00	14.10	3.21	3.57
1300.00	1330.00	6.41	30.10	14.90	3.06	3.50
1350.00	1380.00	6.42	29.80	16.10	2.72	3.01
1400.00	1430.00	6.02	29.60	16.80	2.49	2.76
1450.00	1480.00	6.12	29.00	17.50	2.37	2.55
1500.00	1530.00	5.89	27.90	18.70	2.25	2.37
1600.00	1630.00	5.74	27.00	20.20	1.94	1.99
1700.00	1730.00	5.56	27.50	21.70	1.73	1.66
1800.00	1830.00	5.69	27.00	22.00	1.52	1.46
1900.00	1930.00	5.64	27.00	21.70	1.35	1.25
2000.00	2030.00	5.79	27.10	21.00	1.29	1.11
2100.00	2130.00	5.78	26.50	19.90	1.26	1.03
2150.00	2180.00	5.82	25.70	19.30	1.26	1.02
2200.00	2230.00	6.01	25.60	19.10	1.32	1.02
2250.00	2280.00	6.13	25.20	18.40	1.44	1.02
2300.00	2330.00	6.43	25.30	17.60	1.64	1.02
2350.00	2380.00	6.88	25.00	17.00	1.80	1.06
2400.00	2430.00	7.16	24.60	16.30	1.87	1.09
2500.00	2530.00	6.70	24.10	14.90	1.94	1.21

Electrical Schematic

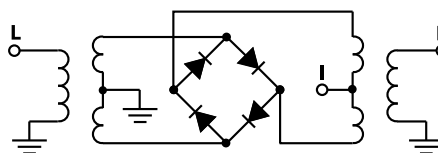






Mini-Circuits®

www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

REV. F
M151107
MBA-15L
EE-7756/2
150921
Page 1 of 2

Performance Charts

MBA-15L+ MBA-15L

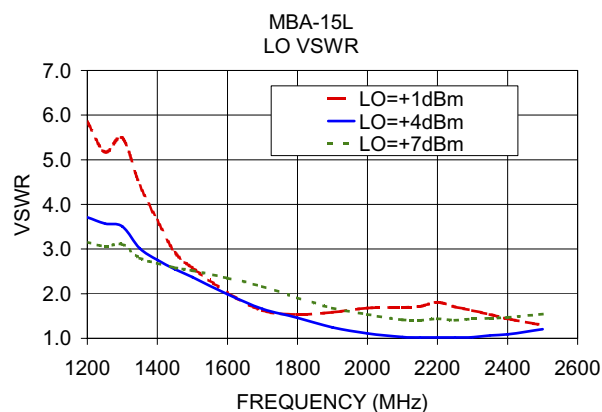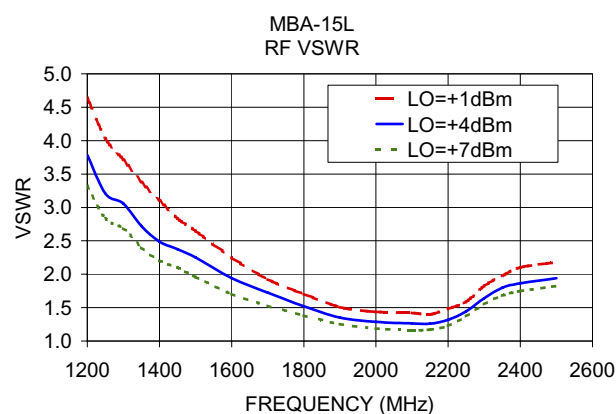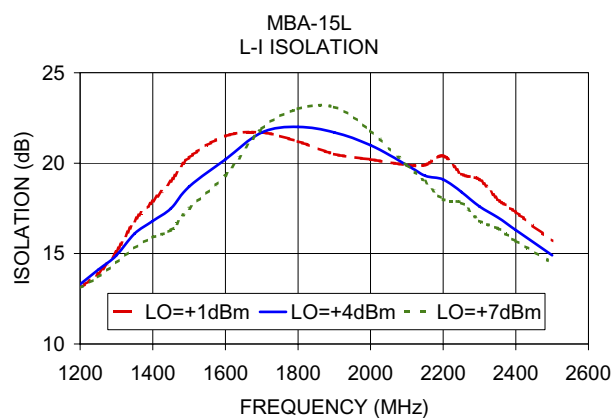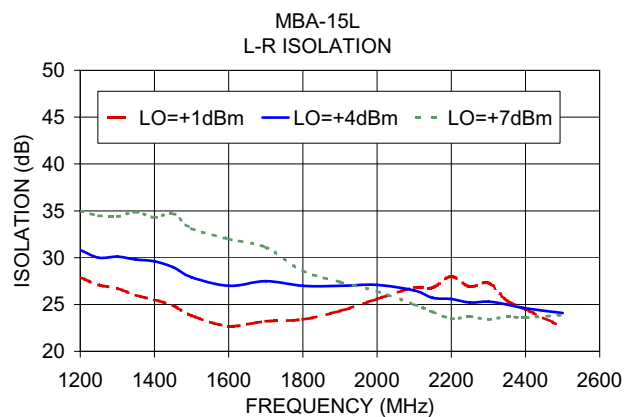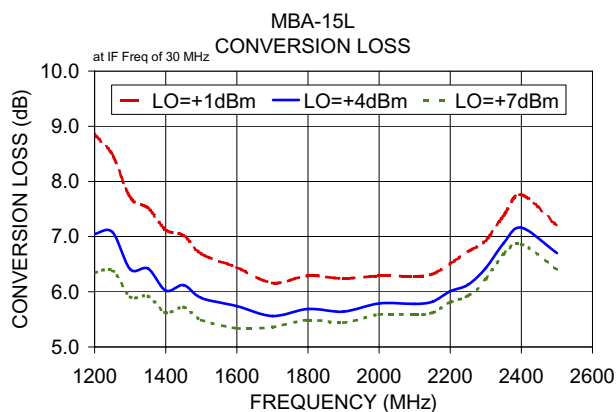

Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

