

P26TG-xxxxE/Z4:1(H35)MLF



PMQ-SERIES

Rev.09-2009

- ✓ 6 Watt
- ✓ **4:1 Ultra Wide Input**
- ✓ Regulated
- ✓ **Single and Dual Output**
- ✓ **1.5 to 3.5 kV DC I/O Isolation**
- ✓ **DIP24 Metal Case**
- ✓ **Continuous Short Circuit Prot.**

The PMQ series P26TG-xxxxE/Z4:1(H35)MLF is a family of cost effective 6W, single & dual output DC-DC converters with a wide input range of 4:1. These converters are encapsulated in DIP24 metal case with high performance features: 1500 to 3500VDC input/output isolation voltage, continuous short circuit protection with automatic restart and tight line / load regulation, high efficiency operation and output voltage accuracy of $\pm 1\%$ maximum.

All specifications typical at $T_a=25^\circ\text{C}$, nominal input voltage and full load unless otherwise specified

Input Specifications

Voltage Range	4:1 Ultra Wide Input
Input Filter	Pi Type
Input Reflected Ripple Current ¹	35 mA pk-pk

Output Specifications

Voltage Accuracy	$\pm 1\%$
Short Circuit Protection	Indefinite (automatic recovery)
Line Regulation	$\pm 0.5\%$
Load Regulation	$\pm 0.5\%$ (3.3 / $\pm 3.3V_{out}$ Models: $\pm 1.5\%$)
Ripple and Noise (20Mhz bandwidth)	60 mV pk-pk
Temperature Coefficient	$\pm 0.02\% / ^\circ\text{C}$

General Specifications

Efficiency	See Table
I/O Isolation Voltage (3 sec.)	1500 VDC (3500 VDC optional)*
I/O Isolation Capacity	470 pF, typ.
I/O Isolation Resistance	1000 MOhm
Switching Frequency (typical)	266 kHz
Humidity	95% rel H
Reliability Calculated MTBF (MIL-HDBK-217F)	> 1.121 Mhrs

Physical Specifications

Case Material	Nickel Coated Copper
Potting Material	Epoxy (UL94V-0 rated)
Weight	~ 17g, typ.

Environment Specifications

Operating Temperature	-40 to +85 $^\circ\text{C}$ (ambient)
Maximum Case Temperature	100 $^\circ\text{C}$
Storage Temperature	-40 to +125 $^\circ\text{C}$
Cooling	Free Air Convection
RoHS Conform	Soldering 260 $^\circ\text{C}$, max. (1.5mm from case 10s.)

Selection Guide

Single/Dual Output

Order #	Input Voltage (VDC)	Input Current No Load (mA)	Input Current Full Load (mA)	Output Voltage (VDC)	Output Current Min. Load (mA)	Output Current Full Load (mA)	Efficiency (%)	Capacitor Load (uF) ²
SINGLE OUTPUT								
P26TG-243R3E4:1MLF	9-36	18	260.13	3.3	0	1400	74	1000
P26TG-2405E4:1MLF	9-36	18	312.5	5	0	1200	80	680
P26TG-2409E4:1MLF	9-36	18	308.64	9	0	666.6	81	330
P26TG-2412E4:1MLF	9-36	18	304.87	12	0	500	82	100
P26TG-2415E4:1MLF	9-36	18	301.2	15	0	400	83	100
P26TG-2424E4:1MLF	9-36	18	308.64	24	0	250	81	68
P26TG-483R3E4:1MLF	18-72	15	130.06	3.3	0	1400	74	1000
P26TG-4805E4:1MLF	18-72	15	156.25	5	0	1200	80	680
P26TG-4809E4:1MLF	18-72	15	154.32	9	0	666.6	81	330
P26TG-4812E4:1MLF	18-72	15	152.43	12	0	500	82	100
P26TG-4815E4:1MLF	18-72	15	150.6	15	0	400	83	100
P26TG-4824E4:1MLF	18-72	15	154.32	24	0	250	81	68


DUAL OUTPUT								
P26TG-243R3Z4:1MLF	9-36	18	333.3	± 3.3	0	± 909	75	± 470
P26TG-2405Z4:1MLF	9-36	18	312.5	± 5	0	± 600	80	± 330
P26TG-2409Z4:1MLF	9-36	18	308.64	± 9	0	± 333	81	± 100
P26TG-2412Z4:1MLF	9-36	18	304.87	± 12	0	± 250	82	± 68
P26TG-2415Z4:1MLF	9-36	18	301.2	± 15	0	± 200	83	± 68
P26TG-2424Z4:1MLF	9-36	18	308.64	± 24	0	± 125	81	± 22
P26TG-483R3Z4:1MLF	18-72	15	166.6	± 3.3	0	± 909	75	± 470
P26TG-4805Z4:1MLF	18-72	15	156.25	± 5	0	± 600	80	± 330
P26TG-4809Z4:1MLF	18-72	15	154.32	± 9	0	± 333	81	± 100
P26TG-4812Z4:1MLF	18-72	15	152.43	± 12	0	± 250	82	± 68
P26TG-4815Z4:1MLF	18-72	15	150.6	± 15	0	± 200	83	± 68
P26TG-4824Z4:1MLF	18-72	15	154.32	± 24	0	± 125	81	± 22

If you need other specifications, please enquire.

*** For optional 3.5kV DC I/O Isolation, please add “H35” before LF!**


→ Example: P26TG-1205Z4:1H35MLF for 3.5kV

Package / Pinning / Derating

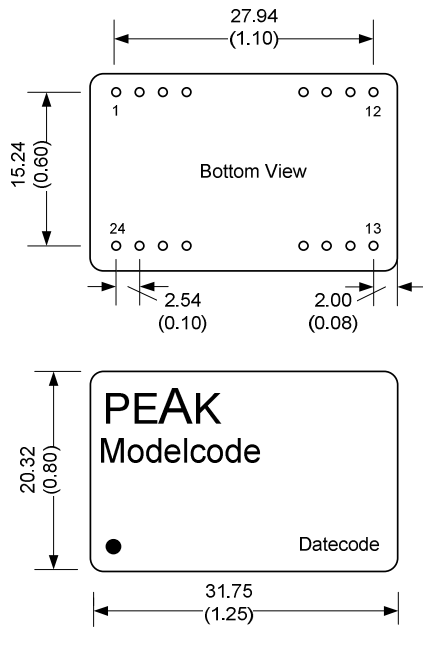

All dimensions are typical in millimeters (inches).
 - Pin diameter: 0.5 +/-0.05 (0.02 +/-0.002)
 - Pin pitch tolerance: +/-0.35 (+/-0.014)
 - Case tolerance +/-0.5 (+/-0.02)
 Standard Drawing
 For exact pinning please see connection table!
 Specification may change without notice.

DIP24 – METAL CASE

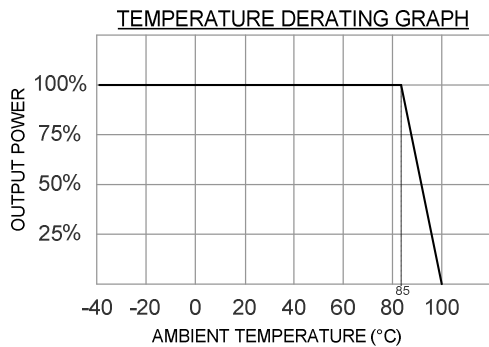

PIN CONNECTIONS				
#	Single 1.5kV	Dual 1.5kV	Single 3.5kV	Dual 3.5kV
1	+Vin	+Vin	Omitted	Omitted
2	N.C.	- Vout	- Vin	- Vin
3	N.C.	Common	- Vin	- Vin
9	Omitted	Omitted	Omitted	Common
10	- Vout	Common	Omitted	Omitted
11	+Vout	+Vout	N.C.	- Vout
12	- Vin	- Vin	Omitted	Omitted
13	- Vin	- Vin	Omitted	Omitted
14	+Vout	+Vout	+Vout	+Vout
15	- Vout	Common	Omitted	Omitted
16	Omitted	Omitted	- Vout	Common
22	N.C.	Common	+Vin	+Vin
23	N.C.	- Vout	+Vin	+Vin
24	+Vin	+Vin	Omitted	Omitted

App Notes:

¹ = Measured Input reflected ripple current with a simulated source inductance of 12uH.

² = Tested by nominal Vin and constant resistor load.