

**PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION**

**Part Number:** [34708-3060](#)  
**Status:** **Active**  
**Overview:** [Stac64™ Single, Multi-Pocket and Hybrid Header System](#)  
**Description:** [Stac64™ 3 Bay Right Angle Headers, 56 Circuits, Bay A 16 Circuit Signal Header, Polarization A, Black; Bay B 20 Circuit Signal Header, Polarization C, Brown; Bay C 20 Circuit Signal Header, Polarization D, Tray](#)

**Documents:**


<a href="#">3D Model</a>	<a href="#">Application Specification AS-34729-020 (PDF)</a>
<a href="#">Drawing (PDF)</a>	<a href="#">RoHS Certificate of Compliance (PDF)</a>
<a href="#">Product Specification PS-31372-100 (PDF)</a>	<a href="#">Product Literature (PDF)</a>
<a href="#">Product Specification PS-34729-020 (PDF)</a>	

**General**

Product Family	PCB Headers
Series	<a href="#">34708</a>
Application	Power, Wire-to-Board
Comments	Bay A 16 Circuits <a href="#">Stac64™ Right Angle Signal Header, Polarization A</a> . Bay B 20 Circuits <a href="#">Stac64™ Right Angle Signal Header, Polarization C</a> . Bay C 20 Circuits <a href="#">Stac64™ Right Angle Signal Header, Polarization D</a>
Overview	<a href="#">Stac64™ Single, Multi-Pocket and Hybrid Header System</a>
Product Literature Order No	987650-4561
Product Name	<a href="#">Stac64™</a>
UPC	884982148260

**Physical**

Breakaway	No
Circuits (Loaded)	56
Circuits (maximum)	56
Color - Resin	Black, Brown, Green
Durability (mating cycles max)	10
First Mate / Last Break	No
Glow-Wire Compliant	No
Guide to Mating Part	No
Keying to Mating Part	None
Lock to Mating Part	Yes
Material - Metal	Copper Alloy
Material - Plating Mating	Nickel
Material - Plating Termination	Tin
Material - Resin	High Temperature Thermoplastic
Net Weight	24.730/g
Number of Rows	2
Orientation	Right Angle
PC Tail Length	3.36mm
PCB Locator	Yes
PCB Retention	None
PCB Thickness - Recommended	1.57mm
Packaging Type	Tray
Pitch - Mating Interface	2.54mm
Pitch - Termination Interface	2.54mm
Polarized to Mating Part	Yes
Polarized to PCB	Yes
Shrouded	Yes
Stackable	No

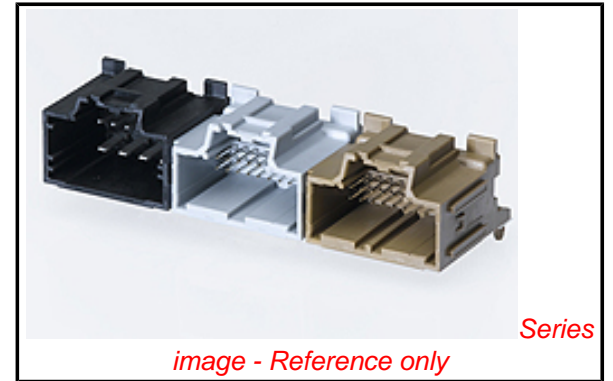

**EU RoHS**

**ELV and RoHS Compliant**  
**REACH SVHC Contains SVHC: No**  
**Low-Halogen Status Low-Halogen**

**China RoHS**



**Need more information on product environmental compliance?**

Email [productcompliance@molex.com](mailto:productcompliance@molex.com)  
 For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

**Search Parts in this Series**

[34708Series](#)

**Mates With**

[31408](#) USCAR 2.54mm (.100") Pitch Receptacle, [31372](#) 5.25mm (.206") Pitch Hybrid Receptacle Assembly, [34729](#) 2.54mm (.100") Pitch [Stac64™ Right Angle Receptacle](#)

Surface Mount Compatible (SMC)	N/A
Temperature Range - Operating	-40°C to +100°C
Termination Interface: Style	Through Hole

### **Electrical**

Current - Maximum per Contact	Contact Molex
Voltage - Maximum	500V

### **Solder Process Data**

Duration at Max. Process Temperature (seconds)	40
Lead-free Process Capability	SMC & Wave Capable (TH only)
Max. Cycles at Max. Process Temperature	3
Process Temperature max. C	260

### **Material Info**

#### **Reference - Drawing Numbers**

Application Specification	AS-34729-020
Product Specification	PS-31372-100, PS-34729-020
Sales Drawing	SD-34708-300

This document was generated on 09/16/2014

**PLEASE CHECK [WWW.MOLEX.COM](http://WWW.MOLEX.COM) FOR LATEST PART INFORMATION**