

## Han 3EMC-HBM-SL-C (cover w. gasket)

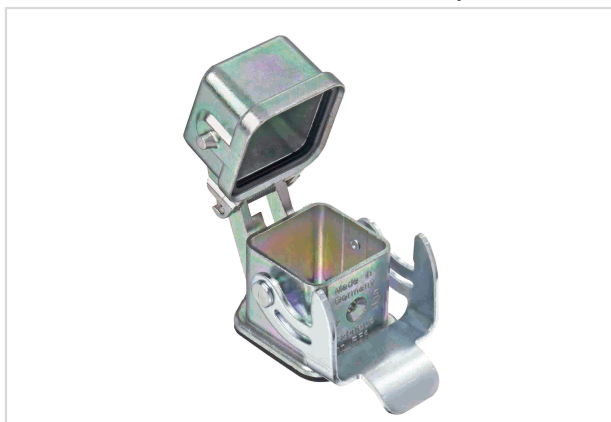


Image is for illustration purposes only. Please refer to product description.

Part number	09 62 003 0306
Specification	Han 3EMC-HBM-SL-C (cover w. gasket)
HARTING eCatalogue	<a href="https://b2b.harting.com/09620030306">https://b2b.harting.com/09620030306</a>

### Identification

Category	Hoods/Housings
Series of hoods/housings	Han <sup>®</sup> EMC
Type of hood/housing	Bulkhead mounted housing
Description of hood/housing	With metal cover With seal (NBR)

### Version

Locking type	Single locking lever
Size	3 A
Field of application	Hoods/Housings for higher EMC requirements
Details	for female inserts

### Technical characteristics

Limiting temperature	-40 ... +125 °C
Degree of protection acc. to IEC 60529	IP44 IP65 / IP67 with seal screw 09 20 000 9918
Type rating acc. to UL 50 / UL 50E	12

### Material properties

Material (hood/housing)	Zinc die-cast
Surface (hood/housing)	Uncoated
Colour (hood/housing)	Unpainted
Material (seal)	PTFE
Material (locking)	Steel



Pushing Performance

## Material properties

Surface (locking)	Zinc plated
RoHS	compliant with exemption
RoHS exemptions	6(a) / 6(a)-I: Lead as an alloying element in steel for machining purposes and in galvanised steel containing up to 0,35 % lead by weight / Lead as an alloying element in steel for machining purposes containing up to 0,35 % lead by weight and in batch hot dip galvanised steel components containing up to 0,2 % lead by weight
ELV status	compliant with exemption
China RoHS	50
REACH Annex XVII substances	No
REACH ANNEX XIV substances	No
REACH SVHC substances	Yes
REACH SVHC substances	Lead

## Specifications and approvals

Approvals	DNV GL
UL / CSA	UL 1977 ECBT2.E235076 CSA-C22.2 No. 182.3 ECBT8.E235076
CE	Yes

## Commercial data

Packaging size	10
Net weight	62.66 g
Country of origin	Romania
European customs tariff number	85389099
eCl@ss	27440202 Shell for industrial connectors