

SPECIFICATION

產品規格書

**High
Efficiency**

Low Noise

產品名稱 / Model Name : M1C-600B1

產品描述 / Description : 600W Power Supply for 1U Easy Swap – 62Pins.

3 outputs [+5V (2 rails),+12V, 5VSB]

版本 / Revision : 1.1


修改紀錄 / Revision History

版本 Rev.	日期 Date	版本描述 Revision Description	修改者 Modify By	客戶認可 Cust. Approval	認可日期 App. Date
1.0	Aug. .08, 2011	Modified the circuit for DC-DC backplane	Kevin Chen		Aug.10, 2011
1.1	Nov. 15, 2012	Add the HE/LN stick and description.	Mindy Chung		Nov. 16, 2012

提交 / Prepared BY	檢查 / Checked BY	批准 / Approved BY
	KEVIN	JACKY

目錄 Contents

- 1. 概述 General Description**
- 2. 輸入規格 Input Characteristics**
 - 2.1. 交流輸入電壓和頻率範圍 AC Input voltage and frequency
 - 2.2. 輸入電流與浪湧電流 Input current and inrush current
 - 2.3. 功率因數 POWER FACTOR
- 3. 效率 Power Efficiency**
- 4. 輸出規格 Output Characteristics**
 - 4.1. 輸出電壓電流調整率 Output Voltage & Current Regulation
 - 4.2. 輸出紋波和噪音 DC Output Ripple & Noise
 - 4.3. 輸出保持時間 Hold Up Time
 - 4.4. 上升時間 Rise Time
 - 4.5. 動態響應時間 Dynamic load response time
 - 4.6. 遠端開關控制 Remote on/off control
- 5. 電源良好信號 Power good signal**
- 6. 保護 PROTECTION**
 - 6.1. 過壓保護 Over voltage protection
 - 6.2. 低壓保護 Under-voltage protection
 - 6.3. 過流保護 Over current Protection
 - 6.4. 短路保護 Short circuit protection
- 7. 電源信號狀態 Power System Signal status**
 - 7.1. 蜂鳴器狀態 Buzzer status
 - 7.2. 燈號指示 LED indicators
 - 7.3. TTL信號 TTL signal
- 8. 負載均流 Load sharing**



9. 絕緣性能 Isolation

- 9.1. 絕緣電阻 Insulation Resistance
- 9.2. 耐壓絕緣 Dielectric Withstand Voltage
- 9.3. 漏電電流 Leakage current

10. 安全要求 Safety Requirements

11. 電磁相容 EMC

- 11.1. 電磁干擾 EMI
- 11.2. 電磁相容 EMS

12. 環境條件 Environmental

- 12.1. 溫度 Temperature
- 12.2. 環境濕度 Humidity
- 12.3. 海拔高度 Altitude
- 12.4. 振動耐受 Vibration
- 12.5. 衝擊耐受 Shock
- 12.6. 冷卻方式 Cooling Method

13. 可靠性 Reliability

- 13.1 平均故障失效時間 MTBF Qualification

14. 機械尺寸和電源連接器 Mechanical 2D Drawing and Power Connector

- 14.1. 外觀尺寸圖 Outside Dimension
- 14.2. 輸出端線材 DC Output 62pin spec



SURE STAR

SURE STAR

1. 概述 General Description

This specification describes the performance characteristics of a 600 watts easy swappable, power system with +5V1, +5V2, +12V main DC outputs, and 5V standby outputs.

SURE STAR Model M1C-600B1.

2. 輸入規格 Input Characteristics

2.1. 交流輸入電壓和頻率範圍 AC Input voltage and frequency

最小值 Minimum	正常值 Nominal	最大值 Maximum	單位 Unit
90	100~240	264	伏特 VAC
47	50~60	63	赫茲 Hz

2.2. 輸入電流與浪湧電流 Input current and inrush current

交流輸入電壓 AC Input Voltage	最大輸入電流 MAX. Input Current per power supply module	浪湧電流 Inrush Current per power supply module
115Vac	10A	25A
230Vac	5A	50A

2.3. 功率因數 Power Factor

90Vac	115Vac	230Vac	264Vac
> 0.99	> 0.98	> 0.95	> 0.92

3. 效率 Power Efficiency

在滿載狀態，115 伏特 60 赫茲輸入下，電源效率為 80%(Min)。

The Minimum efficiency of the power supply is 80% at full load and 1150Vac/60HZ input.



SURE STAR

SURE STAR

4. 輸出規格 Output Characteristics

4.1. 輸出電壓電流調整率 Output Voltage & Current Regulation

輸出電壓 Output Voltage	最小電流 Min. Current	額定電流 Rated current	調整率 REGULATION
+5V1	1A	30A	±5%
+5V2	1A	30A	±5%
+12V	1A	42A	±5%
+5VSB	0.5A	3.5A	±5%

4.2. 輸出紋波和噪音 DC Output Ripple & Noise

Output Voltage	Ripple & Noise (Max.)
+5V1,5V2	60mVp-p
+12V	120mVp-p
+5VSB	50mVp-p


Note:

1. 紋波和噪音頻寬設置在 20 兆赫茲。
Ripple & Noise bandwidth is set to 20MHz。
2. 輸出端並聯一個 0.1 uF 陶瓷電容和一個 10 uF 電解電容來測試紋波和噪音。
Use a 0.1uF ceramic capacitor in parallel with a 10uF electrolytic capacitor at output connector terminals for ripple & noise measurements。

4.3. 輸出保持時間 Hold Up Time

Output Voltage	115VAC Input	230VAC Input
+5V1,5V2	> 16ms	> 16ms
+12V	> 16ms	> 16ms
+5VSB	> 16ms	> 16ms

Note: 所有輸出在滿載狀態 All of dc output at full load.。



4.4. 上升時間 Rise Time

Output Voltage	115/230Vac Input & Full Load
+5V1,5V2	20ms (max.)
+12V	20ms (max.)
+5VSB	20ms (max.)

Note: 上升時間為輸出電壓從10%上升至90%的時間。

The rise time measured is when the output voltages rise from 10% to 90% of specified output voltage V_{out} observed on the channel waveform.

4.5. 動態響應時間 Dynamic load response time

The following shall apply to the 5 V, and 12 V outputs:

Output voltage for each output shall recover to within 5 % of its steady state level in less than 1 ms under the following conditions:

AC Input Voltage: 90VAC ~ 264VAC			
Repetition rate of 100Hz with 50 % duty cycle			
Output	Step Load Size	Load Slew Rate	Capacitive Load
+5V1,5V2	30% to 100% to 30% load	0.5 A/u sec	6000uF
+12V	60% to 100% to 60% load	1 A/u sec	6000uf
+5SB	0% to 100% to 0% load	0.5 A/u sec	350uF

4.6. 遠端開關控制 Remote on/off control

The main outputs of this power supply (5V,12V) shall be energized when input signal *PSON is active. *PSON is an active low TTL compatible signal referenced to the +5V standby common. This input signal shall be an open collector signal capable of sinking a minimum of 1.6mA. When *PSON becomes inactive, the main outputs shall be disabled.

	PSU on	PSU off
PSON Signal	LOW (0.8V max)	HI (2V max)



5. 電源良好信號 Power good signal

The system shall have an active high TTL compatible signal capable of sinking 1mA and sourcing 100uA. The signal shall become active within 100 to 500 ms from the instant +5V output reaches a steady state level within the specified regulation limits. It shall become inactive at least 1 ms before +5V drops to below the lower regulation limit.

Power good @ 115/230VAC , Full Load	200ms ~ 500ms
Power Fail @ 115/230VAC , Full Load	1ms (Min.)

6. 保護 Protection

6.1. 過壓保護 Over voltage protection

Output	Min.	Max.	Comments
+5V1	5.7V	6.9V	PSU shutdown
+12V	13V	14.3V	PSU shutdown

Note：應該在最大交流輸入電壓230伏和輕載、空載下測試。

The power supply shall be test at max AC voltage (230Vac) and min load or no load.

6.2. 低壓保護 Under-voltage protection

Output	Min.	Max.	Comments
+5V1	3.3V	3.7V	PSU shutdown
+12V	8.5V	9.5V	PSU shutdown

Note：應該在最大交流輸入電壓230伏和輕載、空載下測試。


The power supply shall be test at max AC voltage (230Vac) and min load or no load.

6.3. 過流保護 Over current protection

Output	Over Current(Type)	Over Current(Max.)	Comments
+5V1	≥ 33A	45A	PSU shutdown
+12V	≥ 46.2A	63A	PSU shutdown

Note：過流保護測試是在其他額定負載時測試。

The over current protection should be tested at other load rating.



6.4. 短路保護 Short circuit protection

Output	Comments
+5V1, V2	PSU shutdown
+12V	PSU shutdown

Note：短路保護測試是在其他額定負載時測試。

The Short circuit protection should be tested at other load rating.

7. 電源信號狀態 Power System Signal status

7.1. 蜂鳴器狀態 Buzzer status

Power Supply Condition	Buzzer status
No AC power to all PSU	OFF
AC present/Only Standby Output On	OFF
Power supply DC outputs ON and OK	OFF
Power supply failure	Beeping

7.2. 燈號指示 LED indicators

Power Supply Condition	Power system status		Per Power Module status
	RED	GREEN	ORANGE
No AC power to all PSU	OFF	OFF	OFF
AC present/Only Standby Output On	ON	OFF	OFF
Power supply DC outputs ON and OK	OFF	ON	ON
Power supply failure	OFF	Blinking	OFF

7.3. TTL 信號 TTL signal

POWER SUPPLY CONDITION	OUTPUT CONDITION	
	Min.	Max.
NORMAL(POWER SUPPLY ON)	3V	5.25V
FAILURE(POWER SUPPLY OFF)	0V	1V

8. 負載均流 Load sharing

輸出電壓 Output Voltage	負載電流 Load Current	負載均流電壓 Load Share Voltage
+12V	1A	+0.48V ~ +0.52V
+5V1,5V2	1A	+0.33V ~ +0.37V

9. 絕緣性能 Isolation

9.1. 絕緣電阻 Insulation Resistance

Input To Output	500Vdc , 50M ohms Min.(at room Temperature)
Input To FG	500Vdc , 50M ohms Min.(at room Temperature)
Output To FG	Non Insulation

9.2. 耐壓絕緣 Dielectric Withstand Voltage

Input To Output	1834Vac (30 mA) for 1 Minute.
Input To FG	1834Vac (30 mA) for 1 Minute.
Output To FG	Non Insulation

9.3. 漏電電流 Leakage current

在120-264 伏特/50-60 赫茲情況下最大漏電流為3.5mA。

3.5mA max. at 120~264Vac/50~60HZ.

10. 安全要求 Safety Requirements

- IEC 950
- CB REPORT
- TUV EN 60950
- UL or cUL
- BSMI
- CCC



SURE STAR

SURE STAR

11. 電磁相容 EMC

電源電磁干擾滿足以下標準

The power supply shall comply with the following criterion:

11.1. 電磁干擾 EMI

1) Conduction Emission: (傳導干擾度)

A.EN55013/EN55022, CLASS B

B.CISPR13:2001/FCC PART15 CLASS B

2) Radiated Emission : (幅射干擾度)

A.EN55013/EN55022, CLASS B

B.CISPR13:2001/FCC PART15 CLASS B

12. 環境條件Environmental

12.1. Temperature

Operating : 0°C to +40°C

Non Operating: -20°C to +70°C

12.2. Humidity

Operating : 5% to 95%, non-condensing

Non Operating: 20% to 90%,non-condensing

12.3. Altitude

Operating: sea level to 7,000 feet

Non-operating: sea level to 40,000 feet

12.4. 振動耐受 Vibration

10-55Hz, 19.6m/s²(2G), 3minutes period, 60minutes each along X, Y and Z axis.

12.5. 衝擊耐受 Shock

49m/s²(5G),11ms, once each X, Y and Z axis.

12.6. 冷卻方式 Cooling Method

BY BALL BEARING DC FAN.


13. 可靠性 Reliability

13.1 平均故障失效時間 MTBF Qualification

Using MIL - HDBK -217F the calculated MTBF > 100,000 hours at 25°C

14. 機械尺寸和電源連接器 Mechanical 2D Drawing and Power Connector

14.1. Outside Dimension: 247.9(D)x106(W)x40(H)mm

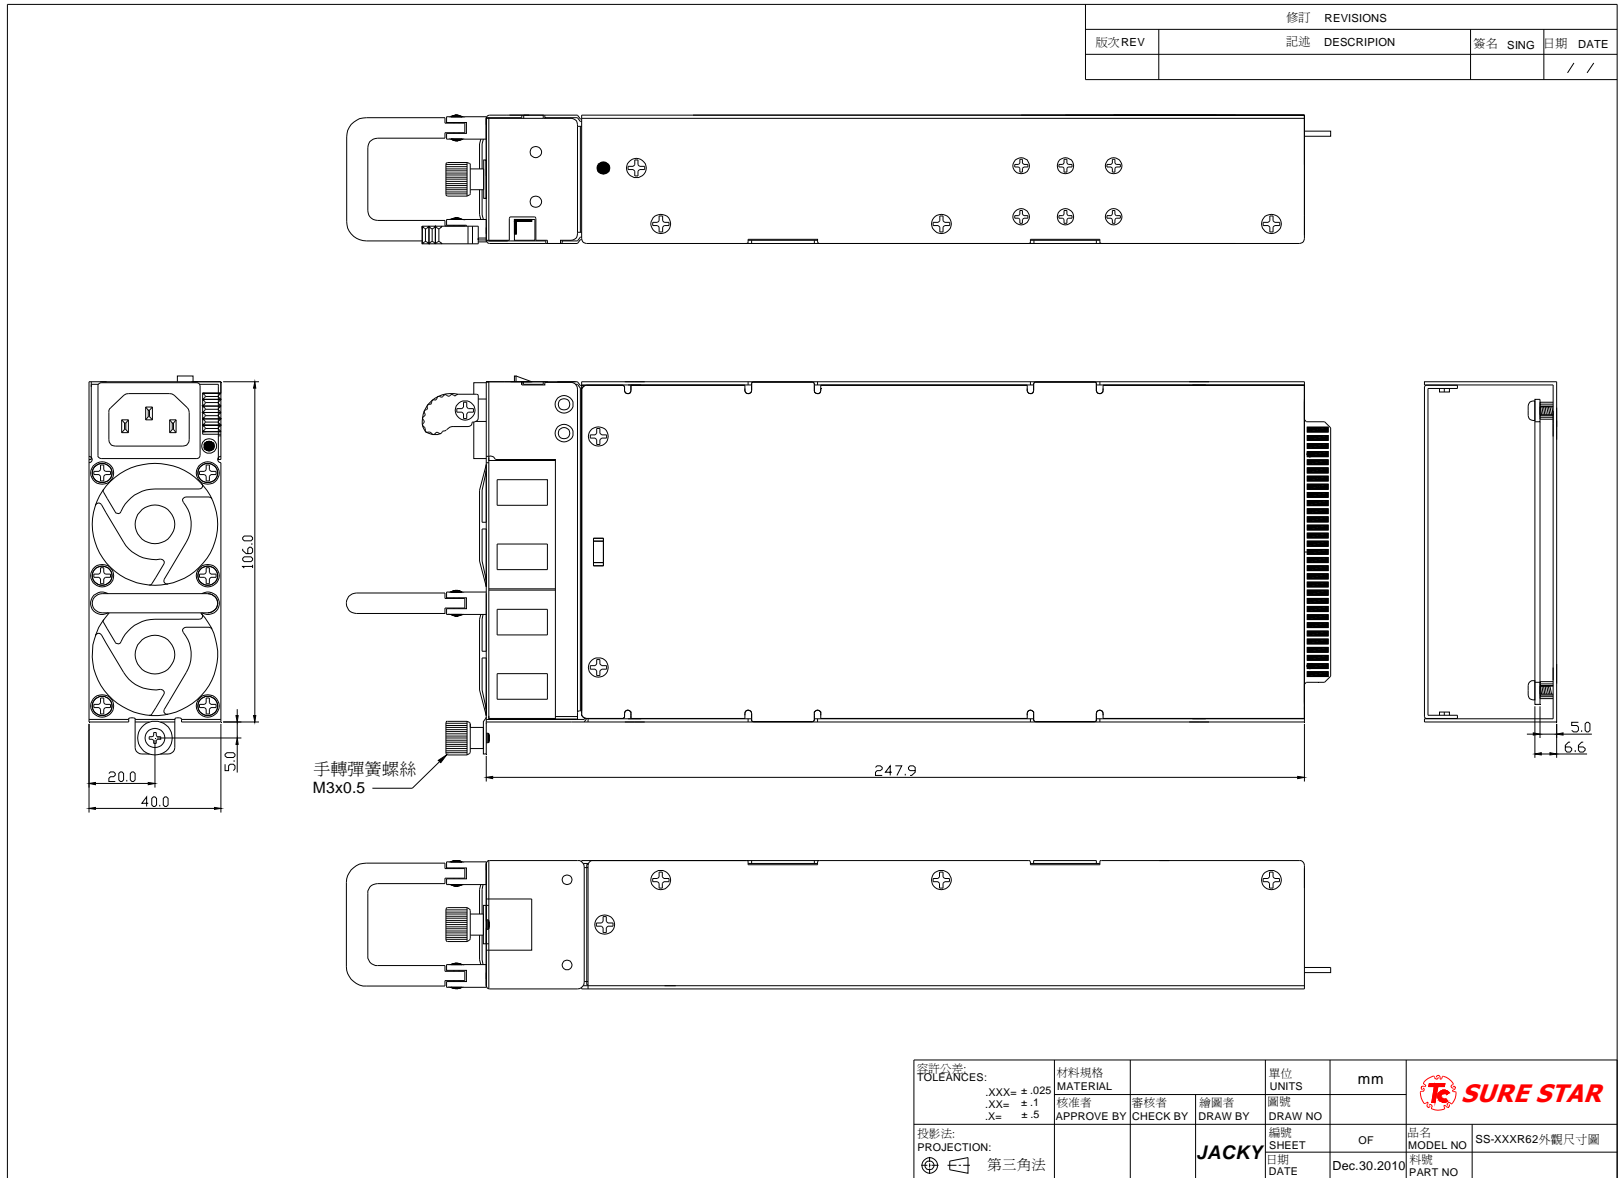

14.2. DC Output pins assignment: 62Pins Golden Finger.

容許公差: TOLERANCES: XXX= ±.025 XX= ±.1 X= ±.5	材料規格 MATERIAL 核准者 APPROVE BY	審核者 CHECK BY	繪圖者 DRAW BY	單位 UNITS mm		品名 MODEL NO	SS-XXXR62外觀尺寸圖
投影法: PROJECTION: 第三角法	JACKY	JACKY	JACKY	圖號 DRAW NO		編號 SHEET	日期 DATE