






3	0.5mm间距无锁立式贴片正向—焊片	PhosphorBronze T=0.30MM	镀锡	2 PCS	
2	0.5mm间距无锁立式贴片正向—PIN	PhosphorBronze T=0.20MM	镀锡	N PCS	
1	0.5mm间距无锁立式贴片正向—基座	LCP	米色	1 PCS	
序号	品名	材料规格	电镀方式/颜色	使用数量	备注

Part No	Pin	A	B	C
FPC-0.5AD-4PB	4	1.50	2.60	5.00
FPC-0.5AD-5PB	5	2.00	3.10	5.50
FPC-0.5AD-6PB	6	2.50	3.60	6.00
FPC-0.5AD-7PB	7	3.00	4.10	6.50
FPC-0.5AD-8PB	8	3.50	4.60	7.00
FPC-0.5AD-9PB	9	4.00	5.10	7.50
FPC-0.5AD-10PB	10	4.50	5.60	8.00
FPC-0.5AD-11PB	11	5.00	6.10	8.50
FPC-0.5AD-12PB	12	5.50	6.60	9.00
FPC-0.5AD-13PB	13	6.00	7.10	9.50
FPC-0.5AD-14PB	14	6.50	7.60	10.00
FPC-0.5AD-15PB	15	7.00	8.10	10.50
FPC-0.5AD-16PB	16	7.50	8.60	11.00
FPC-0.5AD-17PB	17	8.00	9.10	11.50
FPC-0.5AD-18PB	18	8.50	9.60	12.00
FPC-0.5AD-19PB	19	9.00	10.10	12.50
FPC-0.5AD-20PB	20	9.50	10.60	13.00
FPC-0.5AD-21PB	21	10.00	11.10	13.50
FPC-0.5AD-22PB	22	10.50	11.60	14.00
FPC-0.5AD-23PB	23	11.00	12.10	14.50
FPC-0.5AD-24PB	24	11.50	12.60	15.00
FPC-0.5AD-25PB	25	12.00	13.10	15.50
FPC-0.5AD-26PB	26	12.50	13.60	16.00
FPC-0.5AD-27PB	27	13.00	14.10	16.50
FPC-0.5AD-28PB	28	13.50	14.60	17.00
FPC-0.5AD-29PB	29	14.00	15.10	17.50
FPC-0.5AD-30PB	30	14.50	15.60	18.00
FPC-0.5AD-31PB	31	15.00	16.10	18.50
FPC-0.5AD-32PB	32	15.50	16.60	19.00
FPC-0.5AD-33PB	33	16.00	17.10	19.50
FPC-0.5AD-34PB	34	16.50	17.60	20.00
FPC-0.5AD-35PB	35	17.00	18.10	20.50
FPC-0.5AD-36PB	36	17.50	18.60	21.00
FPC-0.5AD-37PB	37	18.00	19.10	21.50
FPC-0.5AD-38PB	38	18.50	19.60	22.00
FPC-0.5AD-39PB	39	19.00	20.10	22.50
FPC-0.5AD-40PB	40	19.50	20.60	23.00

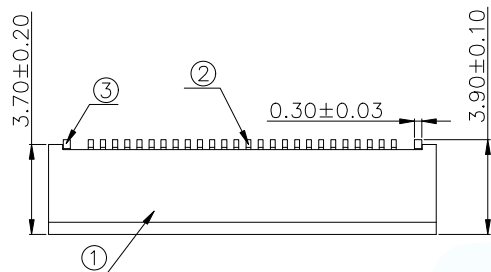


NOTES:

- 额定电流 Current rating: 0.5A
- 额定电压 Voltage rating: 50V
- 耐电压 Withstand voltage: 500V AC/minute
- 接触电阻 Contact resistance: ≤40mΩ
- 绝缘电阻 Insulation resistance: 100MΩ MIN
- 工作温度 Working temperature: -25℃ ~ +85℃

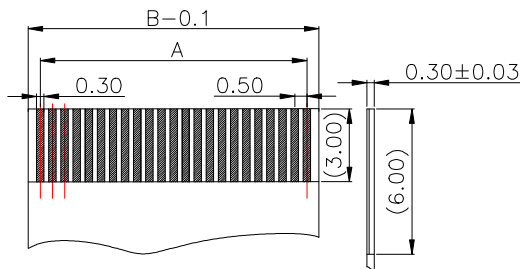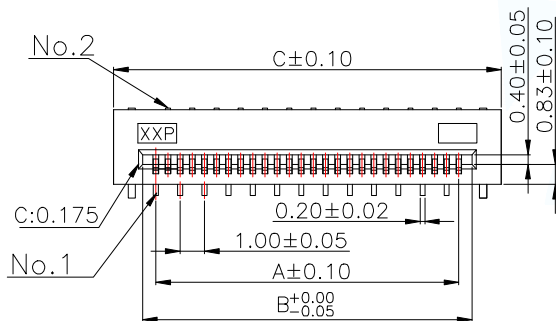

通用FFC寸法 (公差±0.05)  
Applicable FFC

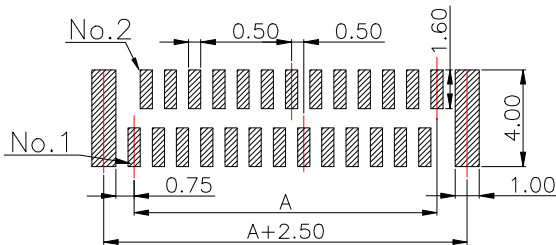

PCB 寸法 (公差±0.05)  
PCB Layout

MANUFACTURE DWG			东莞市讯普电子科技有限公司 DongGuan XunPu Electronics Co.,Ltd	
UNLESS OTHERWISE SPECIFIED TOLERANCES			TITLE: 0.5mm间距立式贴片无锁正向	
DECIMALS:	ANGLES:		PAR	FPC-0.5AD-NPB
.X:±0.38	.X':±5°		DWN	
.XX:±0.20	.XX':±3°		CHKD	
.XXX:±0.05	.XXX':±1°	APVD		
CUSTOMER COPY		SCALE1:1	UNIT:MM	
		SIZE:A4	SHEET:1F1	REV:A