

### FEATURES AND OPTIONS

- Accepts JEDEC leaded type PLCCs
- Available in positions 20, 28, 32, 44, 52, 68, and 84
- Available in either tin or gold plating


### SPECIFICATIONS

#### MATERIALS

Contact: Phosphor Bronze  
Insulator: PBT with 30% glass fiber (UL94V-0)

#### ELECTRICAL

Current rating: 1 A minimum  
Voltage: AC500V r.m.s.  
Insulation resistance: 1000M ohm minimum  
Contact resistance: 30 milliohms maximum  
Operating temperature range: -55°C to +105°C

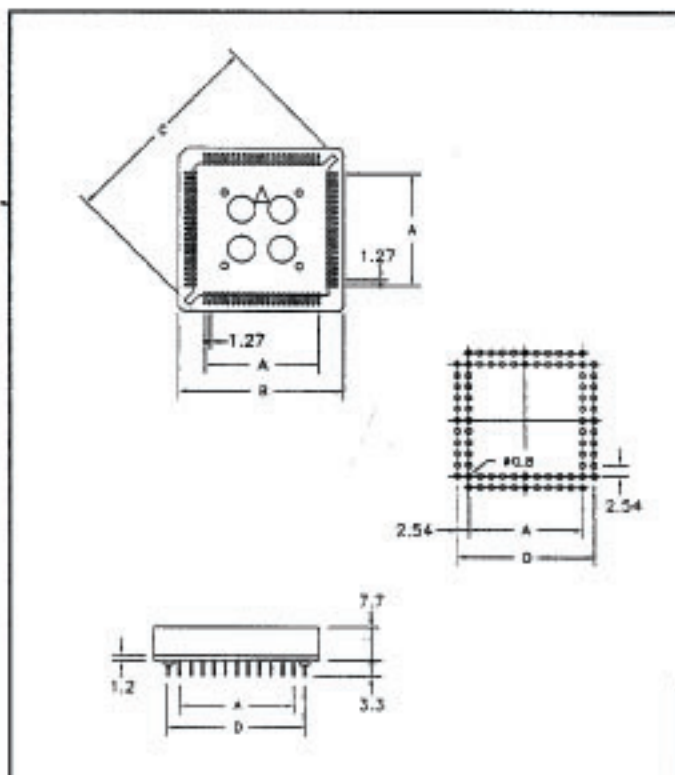

### DIMENSIONS

# of pins	A	B	C	D
20	5.08 .200	15.58 .614	18.30 .720	10.16 .400
28	7.62 .300	18.10 .713	22.20 .874	12.70 .500
32	7.62 .300	18.80 .740	25.70 1.012	12.70 .500
44	10.16 .400	21.30 .839	25.70 1.012	15.24 .600
52	12.70 .500	23.50 .925	29.80 1.173	17.78 .700
68	15.24 .600	26.00 1.024	32.64 1.285	20.32 .800
84	20.32 .800	30.20 1.189	40.10 1.579	25.40 1.000
	25.40 1.000	35.20 1.386	46.90 1.846	30.48 1.200

### HOW TO ORDER

#### A-CCSXX-X

- Z - Tin plated contacts
- G - Gold plated contacts
- XX - Number of contacts