



PASTERNAK ENTERPRISES, INC.
PO Box 16759
Irvine, CA 92623-6759

Toll Free: (866) 727-8376
Direct: +1 (949) 261-1920
FAX: +1 (949) 261-7451
Sales: sales@pasternack.com
Tech Support: techsupport@pasternack.com

PE51006
Wideband
Mobile Antenna,
406 - 512 MHz, 2 dB

Product Features

- 106 MHz bandwidth
- No tuning required
- NMO Mount base

Description


The PE51006 antenna offers excellent bandwidth and low VSWR across the 406 to 512 MHz UHF band. The base and matching coil design is able to withstand high shock environments. The antenna mates with the popular NMO mount design. See the Pasternack catalog or website for the widest selection of NMO cable configurations.

Electrical Specifications ⁽¹⁾

Parameter	Units	Value
Impedance	Ohms	50
Frequency	MHz	406 - 512
VSWR across bandwidth		< 2.0:1
Gain, ground plane	dB	2.0
Gain, no ground plane	dB	0
Power Rating	Watts	150

Mechanical Specifications ⁽¹⁾

Parameter	Value
Antenna Height	Approximately 12"
Whip Diameter	0.10"
Weight	0.6 lbs.
Whip Material	Stainless Steel
Base Coil Housing	Molded polymer jacket & nickel and chrome plated brass bushing
Mating Mount	NMO

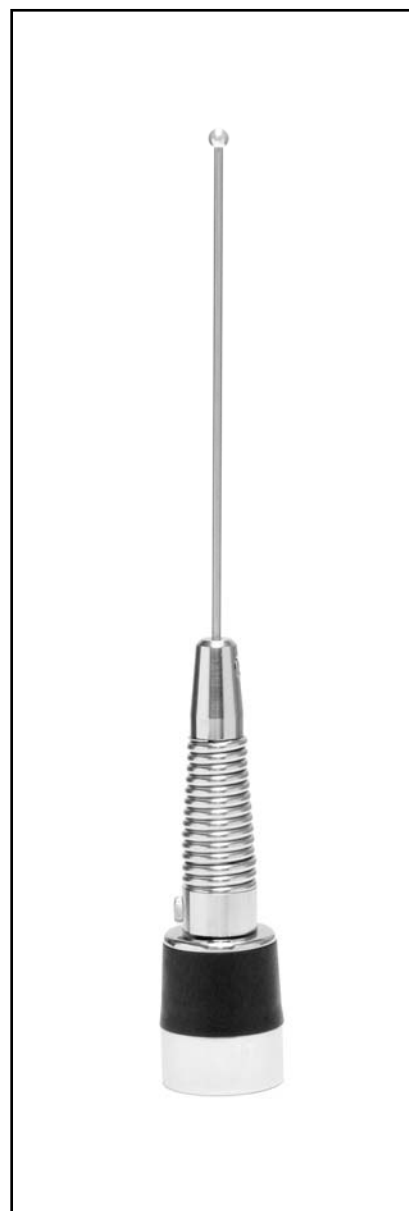

Ordering Information

Part Number	Description
PE51006	Wideband Mobile Antenna, 106 MHz BW @ 2:1 VSWR, No GP required

(1) Pasternack reserves the right to change specifications or information without notice.
www.pasternack.com