

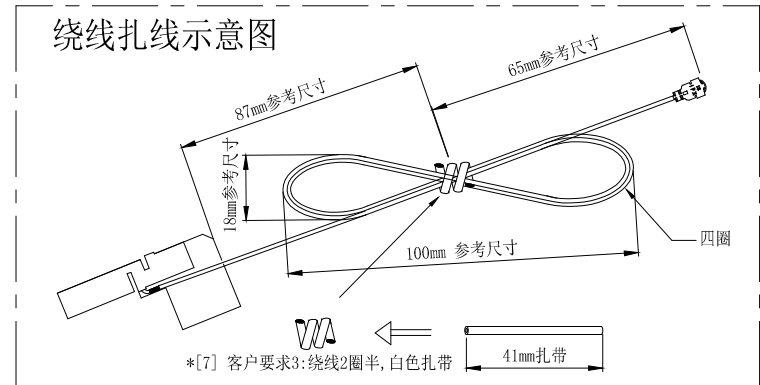
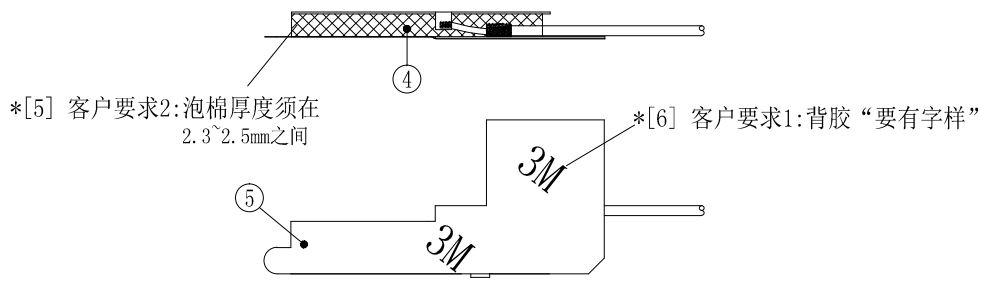


REVISION	DESCRIPTION	DATE	DRAFTER
A0	FIRST RELEASE	18.08.09	DENGJUN.TAN
A1	依客户要求变更包装规范	18.12.20	Mark

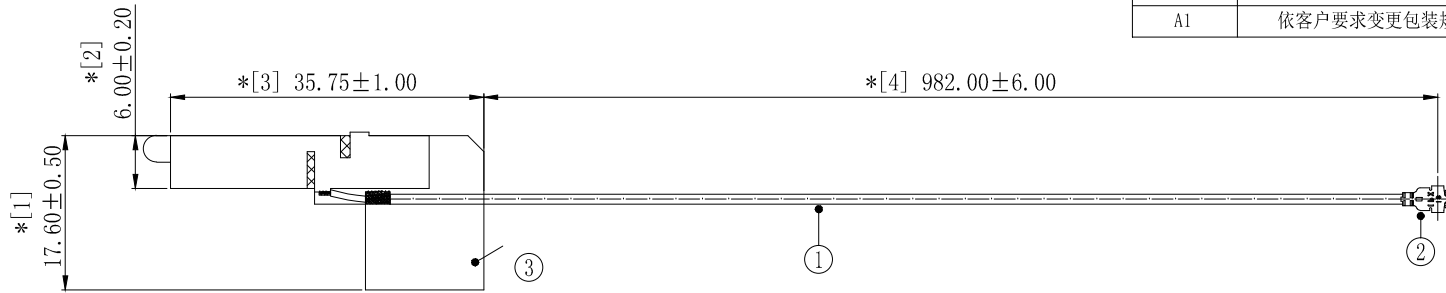

注意：白色扎带, 不要用错

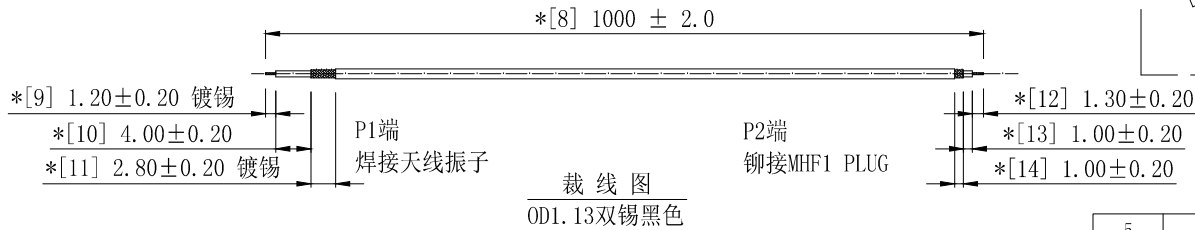

技术要求:

- 电气特性: 使用矢量网络分析仪100%测试。
特性阻抗: 50Ω; 适用频率范围: 2.4GHz-2.5GHz; 驻波比: 最大2.00。
- 尺寸检验: [*]为FAI检测项目; *为重点检测项目; ■为CPK管制项目。
- 外观检验: 目视全检。
产品外观洁净、规整; 表面不得有刮伤、破损和脏污; 镀层色泽光亮均匀, 不得有氧化。
- 包装规范: 1PCS/扎, 20扎/袋, 即20PCS/袋, 热熔机封口 注意: 白色扎带, 不要用错
- 环保要求: 产品及其使用之物料皆需要符合RoHS要求。

5	2MB020	白色底蓝色字3M双面背胶L38.8*W17.4*TO.15mm	1	3M 背胶
4	2MH014	EVA L27.50*W5.70*T2.3~2.5mm, L15.5半面背胶	1	EVA 硬度38度
3	2YC003	洋白制(振子)半剪 L35.75*W17.60*TO.20mm	1	洋白铜, 素材
2	2LM10P113210	MHF-1-PLUG FOR OD1.13 CABLE	1	磷青铜, 镀金1u"
1	2C5M11312BK1	微细同轴电缆, OD1.13双锡黑色	1	浸锡
No.	PART NUMBER	PART NAME & DESCRIPTION	Q' TY	REMARKS

GENERAL TOLERANCE:		HJ-Tech 东莞市皇捷通讯科技有限公司	
LINEAR:		FILE NAME:	TITLE:
X	±0.20	产品图	射频天线组件
X.X	±0.15	ENG/DATE:	WIFI天线 1000mm 1.13黑色芯线焊洋白铜背胶泡棉+IPEX
X.XX	±0.05	DENGJUN.TAN/18.08.09	
X.XXX	±0.01	CHE/DATE:	P/N:
ANGLE:			HJ-IPEX1-RG1.13-1000mm
X°	±4.00°	APP/DATE:	UNIT:
X.X°	±3.00°		mm
X.XX°	±2.00°		SCALE:
X.XXX°	±1.00°		1:1
			REVISION:
			A0
			SHEET:
			1/1

COMPLIANCE WITH THE REQUIREMENT: ■RoHS; □ HF; □ SONY SS-00259; □ OTHERS H260
*NO USING ESTRICTED AND BANNED SUBSTANCE