

SMD Glass Passivated Bridge Rectifiers




GBU8005-G Thru. GBU810-G

Reverse Voltage: 50 to 1000V

Forward Current: 8.0A

RoHS Device




Features

- Rating to 1000V PRV
- Surge overload rating - 200 amperes peak.
- Ideal for printed circuit board
- Reliable low cost construction utilizing molded plastic technique
- Plastic material has underwriters laboratory flammability classification 94V-0

Mechanical Data

- Polarit:As marked on Body
- Mounting position:Any

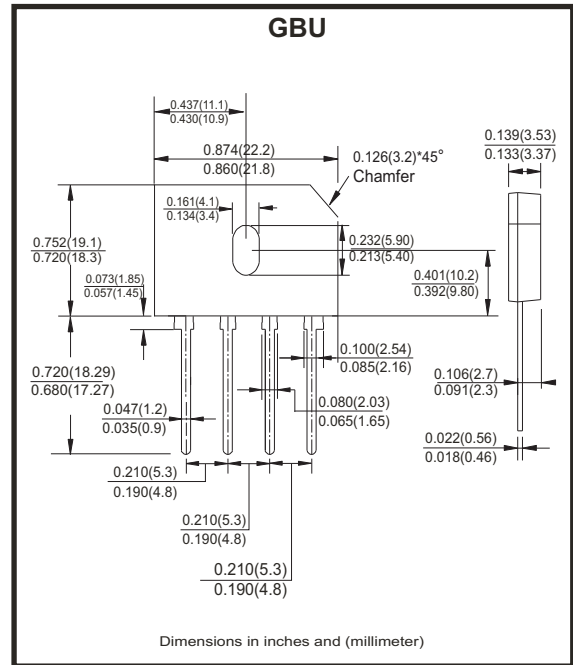

Maximum ratings and electrical characteristics

Rating at 25°C ambient temperature unless otherwise specified.
Single phase, half wave ,60Hz, resistive or inductive load.
For capacitive load, derate current by 20%

Parameter	Symbol	GBU 8005-G	GBU 801-G	GBU 802-G	GBU 804-G	GBU 806-G	GBU 808-G	GBU 810-G	Unit
Maximum Reverse Peak Repetitive Voltage	V_{RRM}	50	100	200	400	600	800	1000	V
Maximum RMS Bridge Input Voltage	V_{RMS}	35	70	140	280	420	560	700	V
Maximum DC Blocking Voltage	V_{DC}	50	100	200	400	600	800	1000	V
Maximum Average Forward (With heatsink Note2) Rectified Current @Tc=100°C (without hestsink)	I_{AV}					8.0			A
Peak Forward Surage Current , 8.3ms Single Half Sine-Wave Super Imposed On Rated Load	I_{FSM}					200			A
Maximum Forward Voltage Drop Per Bridge Element at 4.0A Peak	V_F					1.1			V
Maximum Reverse Current @Tj=25°C At Rate DC Blocking Voltage @Tj=125°C	I_R					10.0			μA
I ² T Rating for Fusing(t<8.3ms)	I^2t					166			°C/W
Typical Junction Capacitandce Per Element (Note 1)	C_J					60			pF
Typical Thermal Resistance	$R_{\theta JA}$					2.2			°C/W
Operating Temperature Range	T_J					-55 to +150			°C
Storage Temperature Range	T_{STG}					-55 to +150			°C

Notes:

1. Measured at 1.0MHz and applied reverse voltage of 4.0V DC.
2. Device mounted on 75mm*75mm*1.6mm Cu plate heatsink.

Fig.1 - Forward Current Derating Curve

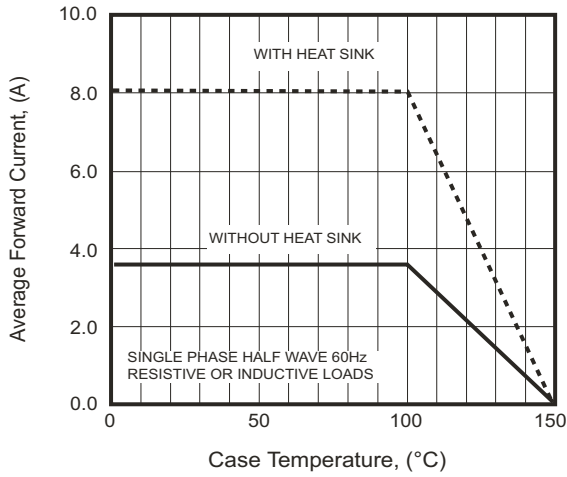


Fig.2 - Maximum NON-Repetitive Surge Current

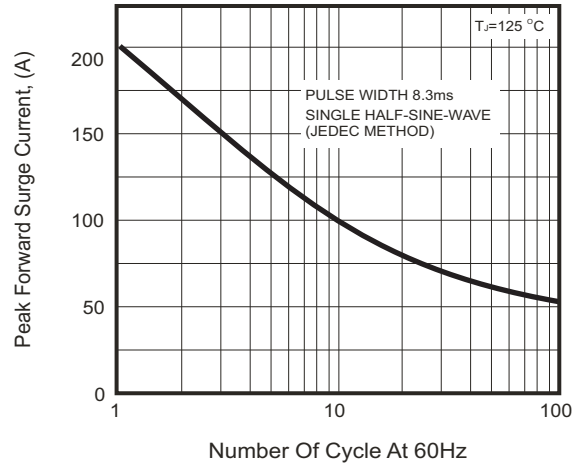


Fig.3 - Typical Junction Capacitance

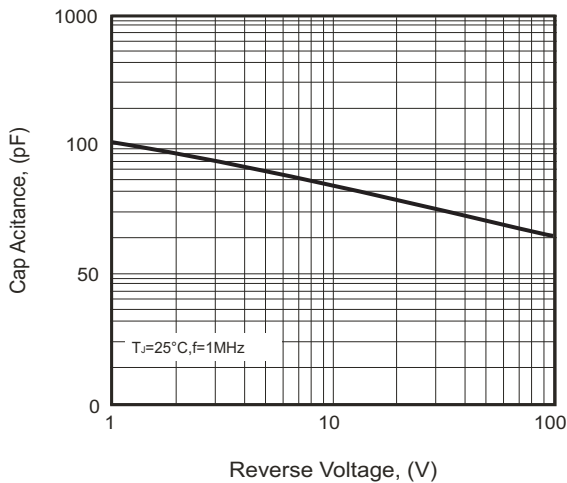


Fig.4 - Typical Forward Characteristics



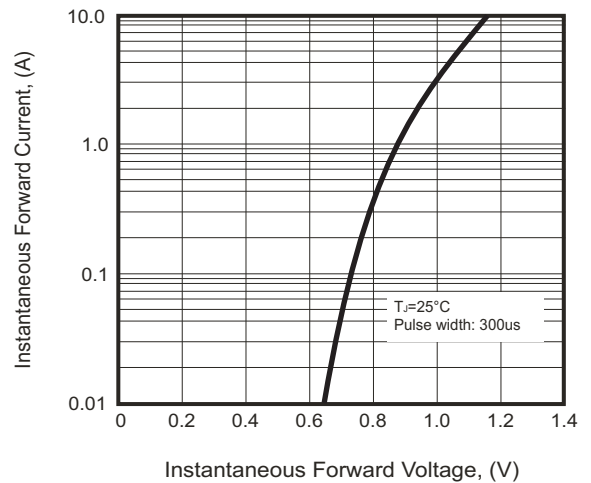


Fig.5 - Typical Reverse Characteristics

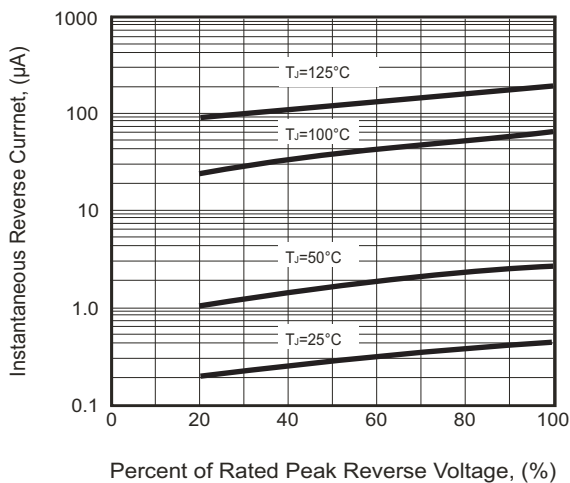

Marking Code

Part Number	Marking code
GBU8005-G	GBU8005
GBU801-G	GBU801
GBU802-G	GBU802
GBU804-G	GBU804
GBU806-G	GBU806
GBU808-G	GBU808
GBU810-G	GBU810



XXX / XXXX = Product type marking code
 C = Compchip Logo

Standard Packaging

Case Type	TUBE PACK	
	TUBE (pcs)	BOX (pcs)
GBU	20	1,000