


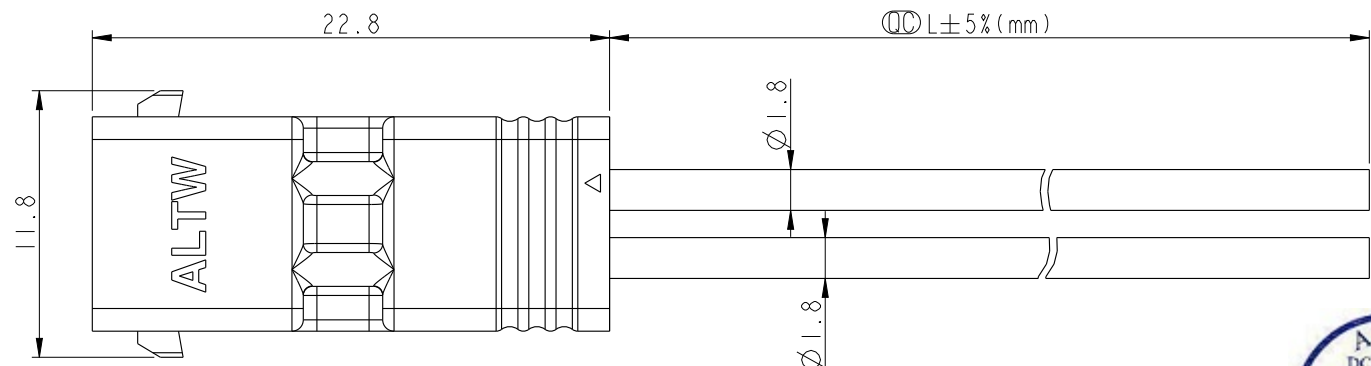


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

| REV. | ECN NO.         | DATE       | SIGN | DESCRIPTION     |
|------|-----------------|------------|------|-----------------|
| A    | Initial Release | 2014/07/31 | Cary | Change To Rev.A |
|      |                 |            |      |                 |
|      |                 |            |      |                 |

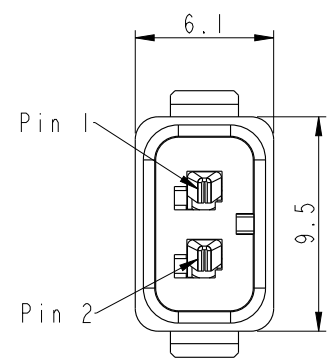

Conn.

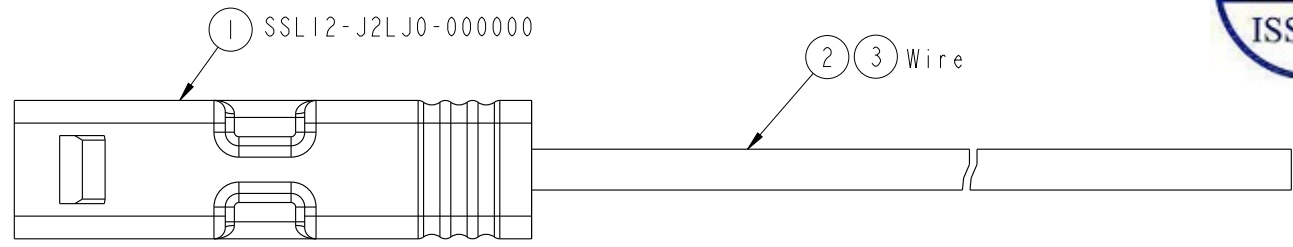

SSL12-J2LJ0-020AXX

- 01: L=100±20mm
- 02: L=200±20mm
- 04: L=400±25mm
- Standard Length is 400mm.
- Wire Length Range(L): 100~9900mm
- 20: 20AWG

- Notes:
- \*  $\varnothing$  Important Dimension To Check.
  - \* Waterpooof Rate: IP68(mating)  
IM Depth Of Water In 24 Hours.
  - \* Housing: Thermoplastic, UL94V-0, Natural White.
  - \* Terminal: Copper Alloy,Gold Plated on contact area.
  - \* Seals: Silicone, Gray.
  - \* Wire: ULI430 20AWG.
  - \* Current Rating : 5A maximum.
  - \* Voltage Rating: 250V DC/AC maximum.
  - \* Operating Temperature: -40~+105°C.

|         |       |   |
|---------|-------|---|
| 2       | Red   | 紅 |
| 1       | Brown | 棕 |
| Conn.   | Wire  |   |
| Pin-out |       |   |

|           |  |                                   |        |
|-----------|--|-----------------------------------|--------|
| UNIT:mm   |  | TITLE                             |        |
| TOLERANCE |  | SSL1.2 2P WIRE ASS'Y JACK TO OPEN |        |
| ±0.50mm   |  | SCALE                             | 3:1    |
|           |  | SIZE                              | A4     |
|           |  | SHEET                             | 1 OF 1 |
|           |  | REV.                              | A      |
|           |  | WC-REV.                           | A.5    |
|           |  | $\varnothing$ Inspection item     |        |

**Amphenol LTW**  
安費諾亮泰企業股份有限公司

|                    |             |            |
|--------------------|-------------|------------|
| ITEM NO            | DRAWN BY    | DATE       |
| DWG NO             | Cary        | 2014-07-31 |
| SSL12-J2LJ0-020AXX | CHECKED BY  | DATE       |
| CUSTOMER           | Fisher      | 2014-07-31 |
| ALTW               | APPROVED BY | DATE       |
|                    | Jerry       | 2014-07-31 |