


VFS9VD31B223Q55#

“#” indicates a package specification code.



< List of part numbers with package codes >
VFS9VD31B223Q55B

Appearance & Shape

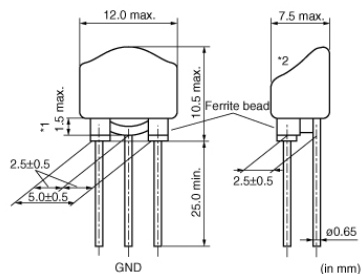

*1 Coating extending on leads does not exceed the tangent line.
Exposed electrode, if any, is covered by solder, etc.
*2 If there is a hole in the top of the filter, the ferrite bead should not be exposed.

Features

VFS9V series is designed for surge protection of the power supply. It protects electric circuits from surge such as static electricity and suppresses EMI noise. Its large capacitance value enables high insertion loss for EMI noise.

Applications

For circuit protection and noise suppression in electronics equipment such as computers and DC motors, and in electronics systems installed in cars such as car audio equipment and engine controllers.

Supplement

Diameter of lead is 0.6mm for taping type.

Taping type is three terminal in-line arrangement.

Applications

Other Usage	For general
-------------	-------------

Packaging Information

Packaging	Specifications	Standard Packing Quantity
B	Bulk(Bag)	200

Attention

1.This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.

2.This datasheet has only typical specifications because there is no space for detailed specifications.

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.

VFS9VD31B223Q55#

“#” indicates a package specification code.



Specifications

Shape	Lead
Length	12.0mm
Length Tolerance	max.
Width	7.5mm
Width Tolerance	max.
Thickness	10.5mm
Thickness Tolerance	max.
Rated Current	7A
Operating Temperature Range	-40°C to 100°C
Mass(typ.)	1.2g
Rated Voltage	12Vdc
Varistor Voltage	22Vdc
Varistor Voltage Tolerance	±20%
Capacitance	22000pF
Capacitance Tolerance	+50/-20%
ESD Test	25kV, 10times

Attention

1.This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.

2.This datasheet has only typical specifications because there is no space for detailed specifications.


Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.

VFS9VD31B223Q55#


“#” indicates a package specification code.




Product Data

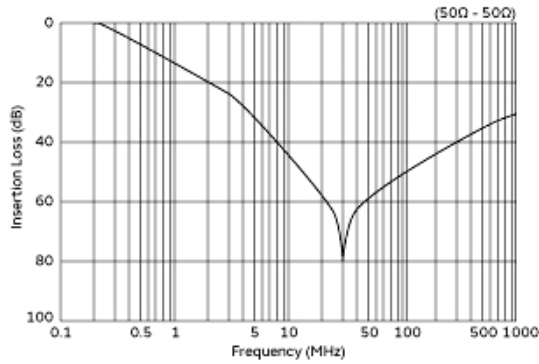

Insertion Loss Characteristics

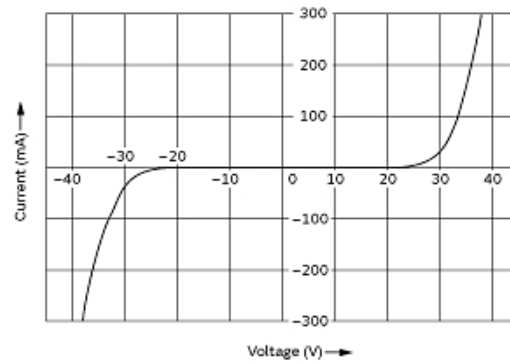

Voltage-Current Characteristics

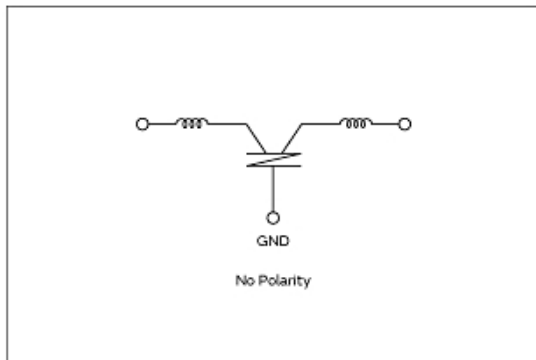

Equivalent Circuit

Attention

- 1.This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.
- 2.This datasheet has only typical specifications because there is no space for detailed specifications. Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.