


Main

Range of product	Preventa Safety detection
Product or component type	Coded magnetic system
Component name	XCSDM4
Design	Rectangular
Size	100 x 34 x 32 mm
Contacts type and composition	1 NO + 1 NO
Material	Plastic
Electrical connection	Connector
Connector type	M12
Local signalling	Green, orange and red 1 LED
Approach directions	9 directions
[Ue] rated operational voltage	24 V DC (- 20...10 %)
[Ui] rated insulation voltage	36 V DC

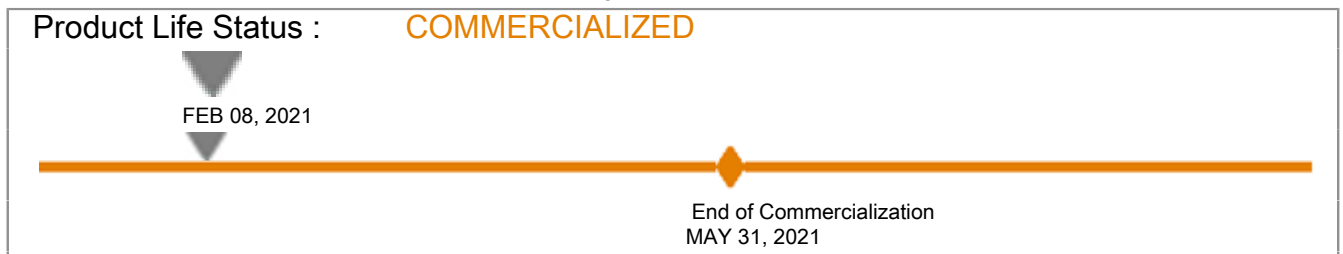

Complementary

Type of output stage	Solid-state, PNP
Safety outputs	2 outputs 1.5 A, 24 V, DC
Alarm output	1 solid-state output, 0.5 A, 24 V, DC, PNP
[Sa] assured operating distance	10 mm
[Sar] assured tripping distance	20 mm
Minimum actuation speed	0.01 m/s
[Uimp] rated impulse withstand voltage	2.5 kV EN/IEC 60947-5-1
Protection type	Overload and short-circuit protection
Switching frequency	3 Hz
Time delay	100 ms activation
Discordance time	2 s
[HFT] Hardware Fault Tolerance	1
Tightening torque	< 1.8 N.m
Installed device	32 maximum with 2 m long cable
Marking	CE

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

Safety level	Category 4 correctly wired conforming to EN/ISO 13849-1 PL = e correctly wired conforming to EN/ISO 13849-1 SIL 3 correctly wired conforming to EN/IEC 61508
Safety reliability data	HFT = 1 MTTFd = 182 years PFD = 1.15E-5 PFH = 3.94E-9 SF = 92.5 %
Enclosure material	Thermoplastic PBT
Depth	32 mm
Height	100 mm
Width	34 mm
Net weight	0.215 kg




Environment

Standards	IEC 61508 ISO 14119 EN/IEC 62061 EN 13849-1 EN/IEC 60947-5-2 EN/IEC 60947-5-1 EN/IEC 60947-5-3
Product certifications	CSA UL TÜV
Ambient air temperature for operation	-25...70 °C
Ambient air temperature for storage	-40...85 °C
Vibration resistance	10 gn (f= 10...500 Hz) conforming to IEC 60068-2-6
Shock resistance	30 gn for 11 ms conforming to IEC 60068-2-27
Maximum sensitivity to magnetic fields	0.5 mT
Electrical shock protection class	Class III conforming to EN/IEC 61140
IP degree of protection	IP67 conforming to IEC 60529

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Weight	234 g
Package 1 Height	4.7 cm
Package 1 width	11.3 cm
Package 1 Length	18 cm
Unit Type of Package 2	S02
Number of Units in Package 2	12
Package 2 Weight	3.131 kg
Package 2 Height	15 cm
Package 2 width	30 cm
Package 2 Length	40 cm

Offer Sustainability

REACH Regulation	 REACH Declaration
REACH free of SVHC	Yes
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope)  EU RoHS Declaration
Toxic heavy metal free	Yes
Mercury free	Yes
RoHS exemption information	 Yes

Contractual warranty

Warranty	18 months
----------	-----------