


The **ACTF 9124/1950/DCC6C** is a low-loss, compact, and economical surface-acoustic-wave (SAW) RF filter in a surface-mount ceramic **DCC6C** case with center frequency **1950.000 MHz**.

### 1. Package Dimensions (DCC6C)

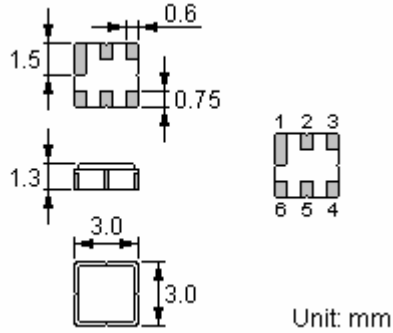


Pin	Configuration
2	Input
5	Output
1, 3, 4, 6	Case Ground


### 2. Marking

Laser Printing

### 3. Test Circuit

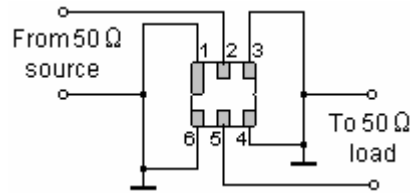

### 4. Typical Frequency Response

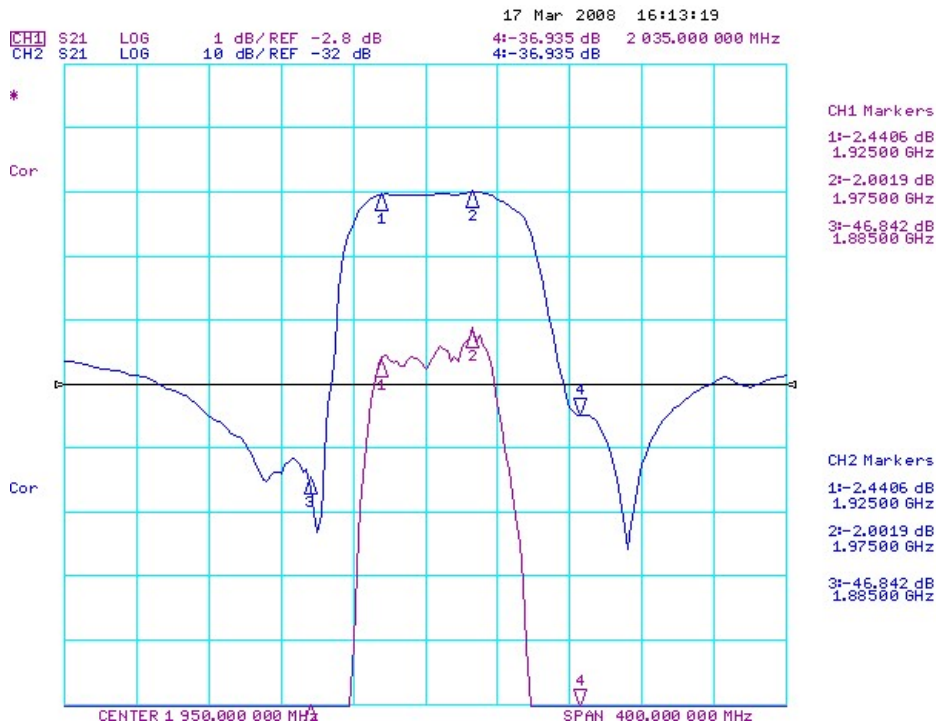

In line with our ongoing policy of product evolution and improvement, the above specification may subject to change without notice. For quotations or further information please contact us at: 3 The Business Centre, Molly Millars Lane, Wokingham, Berkshire, RG41 2EY, UK.

ISO9001:2000 Registered  
<http://www.actcrystals.com>

## 5. Performance

### 5-1. Maximum Ratings

Rating		Value	Unit
Input Power Level	$P$	5	dBm
DC Voltage	$V_{DC}$	0	V
Operable Temperature Range	$T_A$	-40 to +85	°C
Storage Temperature Range	$T_{stg}$	-40 to +85	°C

### 5-2. Electronic Characteristics

Characteristic		Minimum	Typical	Maximum	Unit
Center Frequency	$f_C$	--	1950.00	--	MHz
Insertion Loss	$IL$	--	2.5	3.5	dB
	1925 .... 1975 MHz				
Absolute Attenuation	$\alpha$				
	50 .... 1825 MHz	20	25	--	dB
	1825 .... 1885 MHz	30	35	--	dB
	2035 .... 2085 MHz	28	35	--	dB
	2085 .... 3700 MHz	20	25	--	dB
Amplitude Ripple (p-p)	$\Delta\alpha$				
	1925 .... 1975 MHz	--	1.0	1.5	dB
Input / Output Impedance			50		$\Omega$

**ⓘ CAUTION: Electrostatic Sensitive Device. Observe precautions for handling!**



#### NOTE:

1. The frequency  $f_C$  is defined as the midpoint between the 3dB frequencies.
2. Unless noted otherwise, all measurements are made with the filter installed in the specified test fixture that is connected to a 50 $\Omega$  test system with VSWR $\leq$ 1.2:1.
3. Unless noted otherwise, specifications apply over the entire specified operating temperature range.
4. The specifications of this device are based on the test circuit shown above and subject to change or obsolescence without notice.

In line with our ongoing policy of product evolution and improvement, the above specification may subject to change without notice  
 For quotations or further information please contact us at: 3 The Business Centre, Molly Millars Lane, Wokingham, Berkshire, RG41 2EY, UK.

ISO9001:2000 Registered  
<http://www.actcrystals.com>