

## ADVANCED FEATURES

- ❑ Automatic DC offset
- ❑ Totally Modular Design
- ❑ Two Stage Battery Charger
- ❑ Input Inrush Current Control
- ❑ Synchronized PFC Modules
- ❑ Efficiency exceeding 80%

# RUGGED NAVY GALAXY™ SERIES

## TRUE ON-LINE UPS

POWER FACTOR CORRECTED  
&  
GALVANICALLY ISOLATED

1.5KVA & 2.5KVA

BULKHEAD MOUNT



OPTIONAL FEATURES SHOWN

## APPLICATIONS

This rugged UPS is specifically designed for submarine and shipboard applications in compliance to MIL-STD-1399, MIL-STD-461, MIL-S-901, MIL-STD-167, MIL-STD-810, and MIL-STD-740. It provides very high quality pure sinewave output (2% THD) and is capable of driving non-linear loads such as non-PFC Switching Power Supplies.



**NOVA ELECTRIC**

[www.novaelectric.com](http://www.novaelectric.com)  
[novasales@theallpower.com](mailto:novasales@theallpower.com)



ISO 9001

A Leader in UPS Technology since 1966 - 500VA to 500+KVA

# ADVANCED TRUE ONLINE RUGGED SINEWAVE UPS

## BULKHEAD MOUNT

Designed to comply with MIL-STD-1399, MIL-STD-461, MIL-STD-167, MIL-STD-810, MIL-S-901 and MIL-STD-740.

### APPLICATIONS

This Power Factor Corrected Shipboard / Submarine Grade UPS is specifically designed and tested for Naval Applications where MIL-STD-1399 power requirements apply. This unit contains many advanced features, yielding superior performance and reliability.

### OPTIONS

- Single Phase Input
- RS 232 or SNMP Interface
- MS Connector Mates
- High Speed Mechanical Transfer Switch
- Wide temperature range
- Shock mounts
- Manual bypass switch
- External bypass switch
- Custom Paint & Markings

### DIMENSIONS

30" H x 24" W x 12" D  
including internal batteries

### SPECIFICATIONS

#### ELECTRICAL

Optional Input Voltages available (select):  
115, 120, 208, 220, 230, 240 VAC. 1Ø  
115/200, 120/208, 220/380 3Ø  
Optional Input Frequencies available (specify):  
50, 60 or 400 Hz  
Optional Output Voltages Available (specify):  
115, 120, 208, 220, 230, 240 VAC 1Ø  
Output Frequency (specify): 50, 60 or 400Hz  
Voltage Regulation: ± 2% NL to FL  
Frequency Regulation: 0.1%  
Harmonic Distortion: 2% THD Typical  
5% Max  
Input Power Factor: 0.99  
Efficiency at full load: 82% typical  
Overload: 125% for 5 minutes

#### INTERNAL BATTERIES

Premium wide temp batteries which are sealed, maintenance- free, and user replaceable. Extended runtime available

#### PROTECTIVE FEATURES

AC & DC Input Circuit Breakers, Low Battery Shut Off, Overload & Thermal Protection, Audible Alarm with Silence Switch, and optional EPO.

#### ENVIRONMENTAL


Operating Temp: -20° to +50°C per MIL-STD-810  
Storage Temp Range: -40° to +60°C  
Humidity: to 95% non-condensing  
Elevation: 15,000 Ft. (4,572m) operating  
40,000Ft(12,192m) non-operating  
Audible Noise: Less than 55 dbA at 5 ft.  
Cooling: Forced air  
EMI: per MIL-STD-461  
Vibration: per MIL-STD-167  
Shock: 20g for 20mS half sinewave per MIL-S-901D Grade A  
Structureborne noise: MIL-STD-740B Grade A  
MTBF: 100,000+ hours per field data  
MTTR: 30 minutes

#### ALARMS & DIAGNOSTICS

System Status (Green/Red)  
Utility Off (Red)      UPS Overload (Red)  
UPS Off (Red)      Over Temp. (Red)  
Low Battery (Red)      Load On Utility (Red)  
Logic Fault (Red)      (with XFR SW Option)  
Alarm Contacts: Standard  
RS 232 or SNMP: Optional

### MODEL SELECTION

PARTIAL MODEL SELECTION	KVA	INPUT	OUTPUT	UPS LBS	RUN TIME
NGHS11-1.5K60-115-120	1.5	115 VAC	120 VAC	145	10 min
NGHS11-1.5K60-115(D)-120	1.5	115 VAC L-L	120 VAC	145	10 min
NGHRS11-2.5K60-115-120	2.5	115 VAC	120 VAC	155	10 min
NGHS11-2.5K60-115(D)-120	2.5	115 VAC L-L	120 VAC	155	10 min

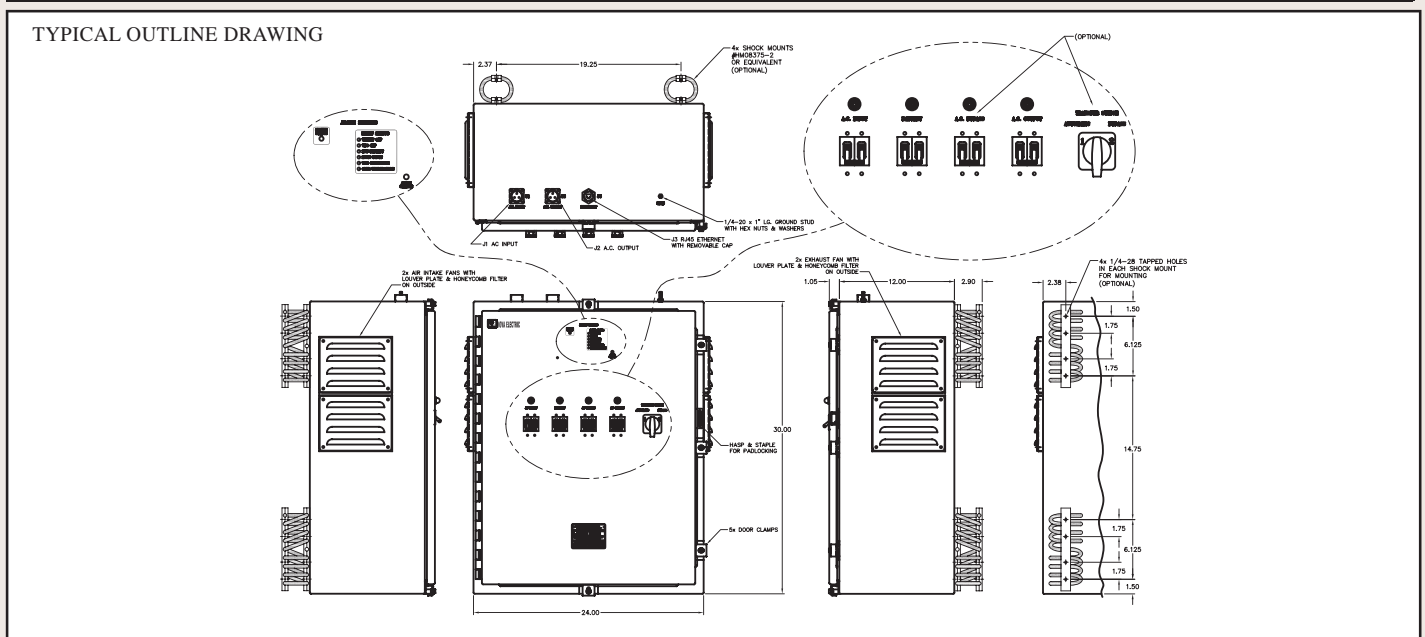

WEB : [www.novaelectric.com](http://www.novaelectric.com)  
E-Mail : [novasales@theallpower.com](mailto:novasales@theallpower.com)  
PHONE : (201) 385-0500 FAX : (201) 385-0702



**NOVA ELECTRIC**  
A Division of  
TECHNOLOGY DYNAMICS, INC.  
100 School St., Bergenfield NJ 07621



ISO 9001